



| | |
|----------------------------------|--|
| Order Code | TCK-118 |
| Inductance (each winding) | 175 $\mu\text{H} \pm 25\%$ (at 10 kHz / 50 mV) |
| Impedance (DCR) | 34 m Ω max. |
| Rated Current | 1.76 A max. |
| Rated Voltage | 500 VDC max. (between windings) |
| Operating Temperature | -40°C to +105°C |
| RoHS Exemptions | No Exemptions |



Impedance Curve

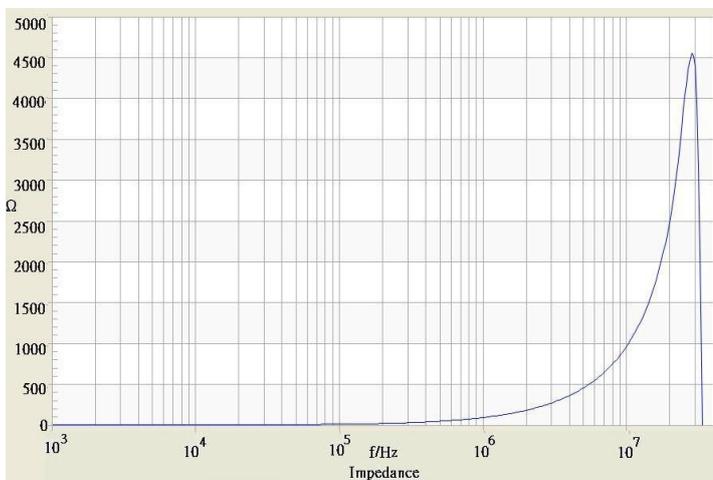

Outline Dimensions

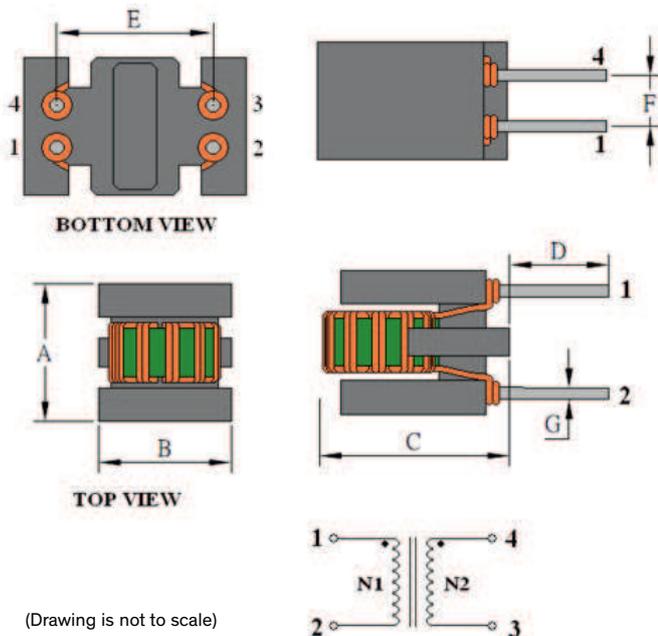

| Dimensions [mm] | |
|-----------------|----------------|
| A | 7.9 max. |
| B | 8.5 max. |
| C | 10.5 max. |
| D | 3.5 ± 1.0 |
| E | 5.08 ± 0.5 |
| F | 2.54 ± 0.3 |
| G | 0.6 ± 0.1 |

All specifications valid at +25°C, unless otherwise stated.