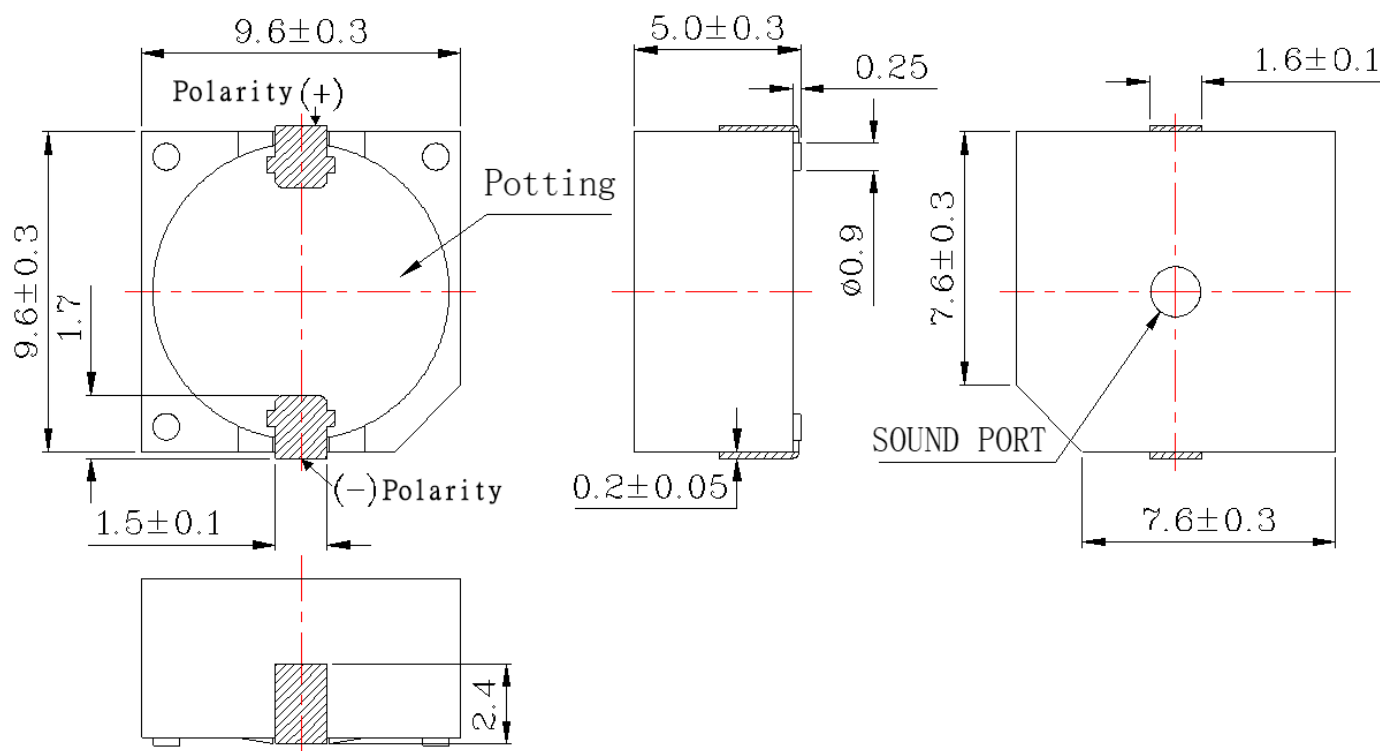


**May not be suitable for all Medical and Aerospace applications.  
Contact Mallory Sonalert to discuss your application.**

|                                    |                                   |
|------------------------------------|-----------------------------------|
| Oscillation Frequency (Hz)         | 2700 ± 300                        |
| Operating Voltage (VDC)            | 4.0 ~ 7.0                         |
| Rated Voltage (VDC)                | 5.0                               |
| Current Consumption Max. (mA)      | 30 at Rated Voltage               |
| Sound Pressure Level Min. (dB)     | 80 at 10cm at Rated Voltage       |
| Tone / Pulse Rate                  | Constant                          |
| Operating Temperature (°C)         | -20 ~ +70                         |
| Storage Temperature (°C)           | -30 ~ +85                         |
| Housing                            | PPS plastic resin (Color: Black)  |
| Type of Connection                 | SMD                               |
| Weight (Grams)                     | 1.5                               |
| Condition by reflow soldering (°C) | 255 ±5 / within 5 sec             |
| Condition by hand soldering (°C)   | 350 ±20 / within 5 sec            |
| Options                            | For other options contact factory |

**Dimensions:** (units: mm)

**Packaging:** Parts are supplied on reels (600 pcs per tape and reel).