

MALLYORY**Mallory Sonalert
Products Inc.**

Part #

ASI09N40MTRQ**Sales Outline Drawing**


Revision

A

**May not be suitable for all Medical and Aerospace applications.
Contact Mallory Sonalert to discuss your application.**

Oscillation Frequency (Hz)	4000 ± 300
Operating Voltage (VDC)	2.5 ~ 5.5
Rated Voltage (VDC)	5.0
Current Consumption Max. (mA)	2 at Rated Voltage
Sound Pressure Level Min. (dB)	80 at 10cm at Rated Voltage
Tone / Pulse Rate	Constant
Operating Temperature (°C)	-20 ~ +100
Storage Temperature (°C)	-30 ~ +110
Housing	LCP (Color: Black)
Type of Connection	SMD
Weight (Grams)	0.8
Condition by reflow soldering (°C)	250 ±5 / within 5 sec
Condition by hand soldering (°C)	350 ±20 / within 5 sec
Options	For other options contact factory

Dimensions: (units: mm)

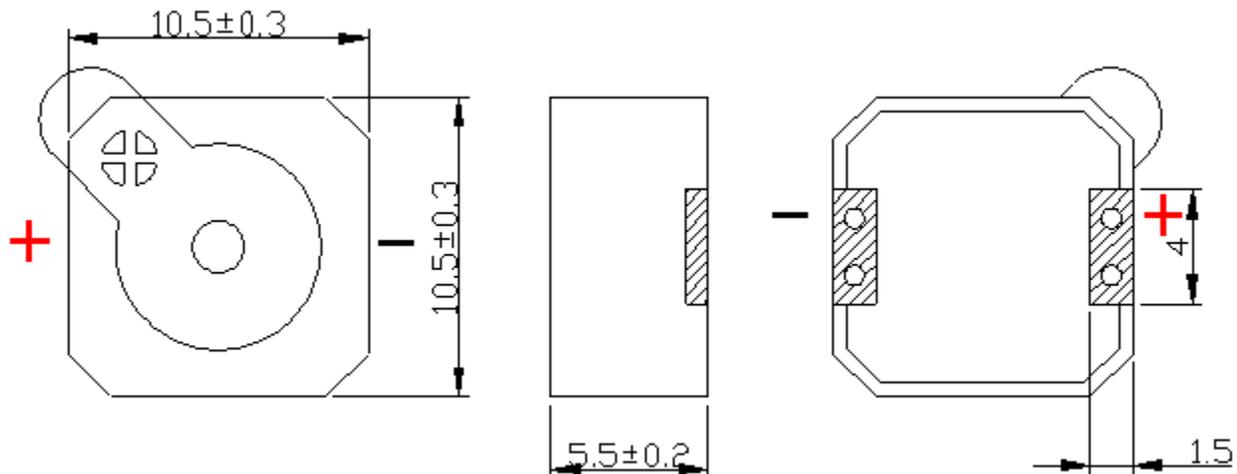

Attention: Must be installed with correct polarity.

Packaging: Parts are supplied on reels (600 pcs per tape and reel).

Units come with wash label and are suitable for aqueous wash