


**May not be suitable for all Medical and Aerospace applications.  
Contact Mallory Sonalert to discuss your application.**

|                                |                                                |
|--------------------------------|------------------------------------------------|
| Oscillation Frequency (Hz)     | 2900 ± 300                                     |
| Operating Voltage (VAC/DC)     | 12 ~ 28                                        |
| Rated Voltage (VAC/DC)         | 24                                             |
| Current Consumption Max. (mA)  | 20 at Rated Voltage                            |
| Sound Pressure Level Min. (dB) | 90 at 30cm at Rated Voltage                    |
| Tone / Pulse Rate              | Constant                                       |
| Operating Temperature (°C)     | -20 ~ +70                                      |
| Storage Temperature (°C)       | -30 ~ +80                                      |
| Housing                        | ABS 757 UL94HB Plastic Resin<br>(Color: Black) |
| Lead Wires                     | 28 AWG                                         |
| Weight (Grams)                 | 14.2                                           |
| Options                        | For other options contact factory              |

**Dimensions:** (units: mm)

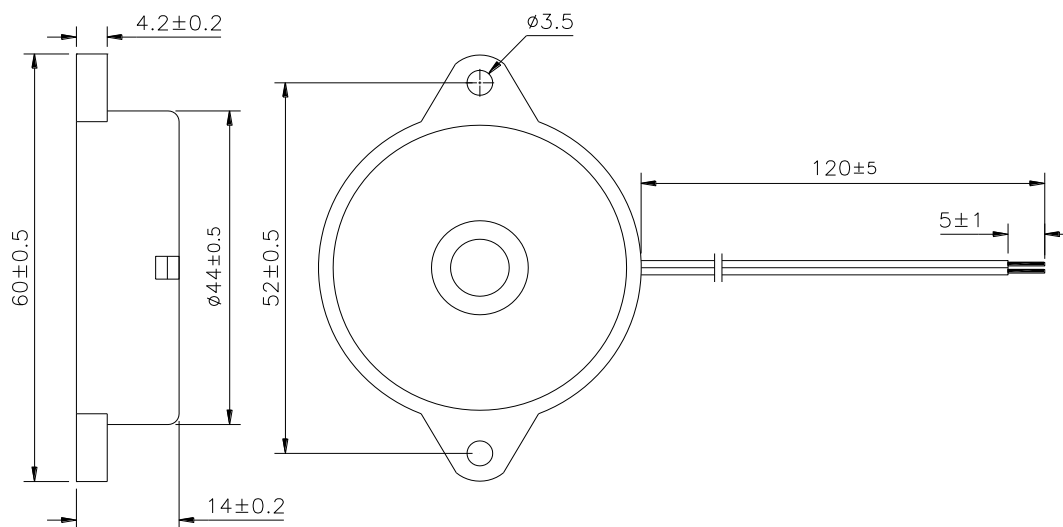

Unit:mm