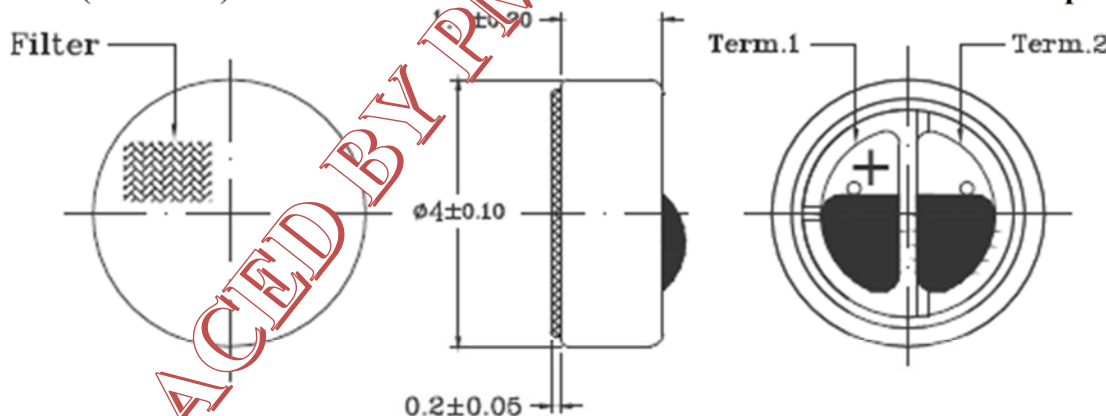
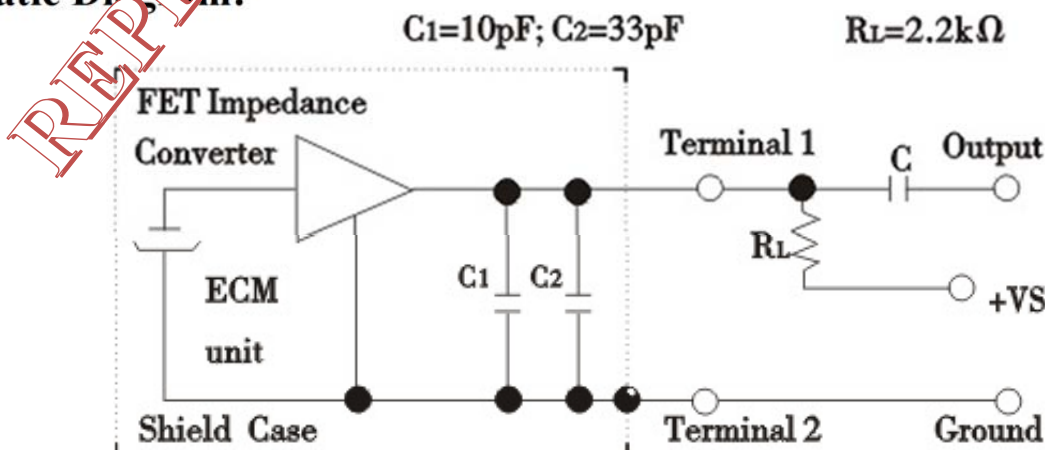


**May not be suitable for all Medical and Aerospace applications.
Contact Mallory Sonalert to discuss your application.**

Sensitivity Range	-42 ± 3 dB $R_L = 2.2$ k Ω $V_{cc} = 2.0$ v (1 kHz 0 dB = 1 μ V/1 m)
Impedance	Max. 2.2k Ω 1 kHz ($R_L = 2.2$ k Ω)
Frequency	50 - 1200 Hz
Current Consumption	Max. 5 μ A
Operating Voltage Range	1.0 - 10 V
Max SPL (dB)	120 dB
S/N Ratio	More than 58 dB
Sensitivity Reduction	2.0 - 1.5 Variation less than 3 dB
Storage Condition	-20 ~ +60°C; R.H. < 45%~75%
Operating Condition	-10 ~ +45°C; R.H. < 85%
Weight (g)	0.2
Options	For other options contact factory

Dimensions: (units: mm)

ROHS Compliant


Schematic Diagram:


Packaging: Bulk pack in quantities of 100pcs.