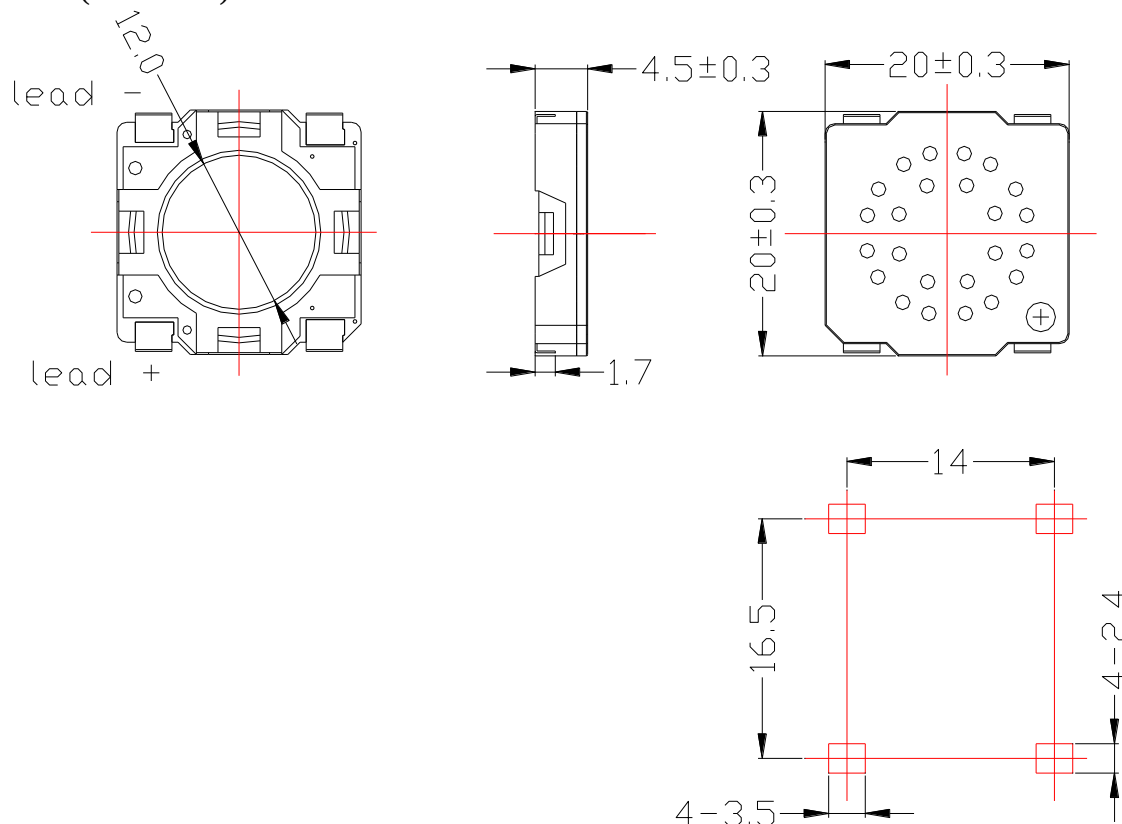


**May not be suitable for all Medical and Aerospace applications.  
Contact Mallory Sonalert to discuss your application.**

|                                                      |                                                                                                                |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Voice Coil Impedance ( $\Omega$ )                    | $8 \pm 15\%$                                                                                                   |
| Rated Input (W)                                      | 0.8                                                                                                            |
| Max. Input (W)                                       | 1.0                                                                                                            |
| Lowest Resonance Freq Fo (Hz)                        | $850 \pm 20\%$                                                                                                 |
| Frequency Range (Hz)                                 | Fo ~ 20,000                                                                                                    |
| Output S.P.L. (dB)                                   | 90dB (0.1W/0.1m) $\pm 3$ at 1.0k, 1.6k,<br>2.0k, 3.2kHz<br>80dB (1W/1m) $\pm 3$ at 1.0k, 1.6k, 2.0k,<br>3.2kHz |
| Magnet Size (mm)                                     | $\varnothing 6.7 * 1.1$                                                                                        |
| Magnet                                               | SmCo                                                                                                           |
| Weight (g)                                           | 1.5                                                                                                            |
| Frame Material                                       | LCP Plastic                                                                                                    |
| Operating/storage temperature ( $^{\circ}\text{C}$ ) | -40 ~ +85                                                                                                      |
| Options                                              | For other options contact factory                                                                              |

**Dimensions:** (units: mm)

Units do not come with wash label and are not appropriate for aqueous wash.