

Model No:: TA6FC00-04

Product Line: Tymphany

Rev: 1


Last Update: 2018-12-13 02:14:09

## Product Description

This 2 inch 4 ohm member of the new TA family sets a high standard for compact full range drivers. Intended for applications such as television soundbars and other compact applications in mind. Design features in this family include a stiff steel basket with venting under the spider to aid cooling of the motor, a NdFeB magnet motor with copper cap to lower coil inductance, providing low distortion at low frequencies and extended high frequency response. A black anodized aluminium cone and a black anodized aluminium dust cap are employed on the driver, coupled directly to the voice coil.




## Mechanical Drawing

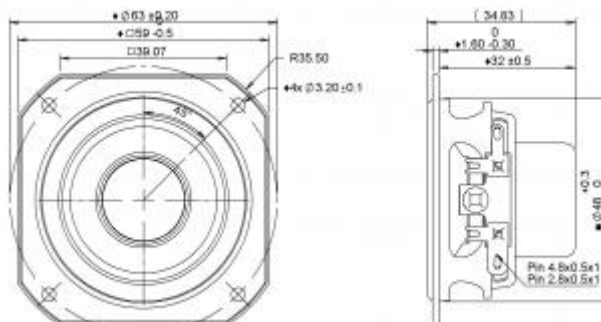

## Specifications

DC Resistance	Revc	Ohms	3.38	5.0%	Energy Bandwidth Product	EBP	(1/Qes)*fs
Minimum Impedance	Zmin	Ohms	4.08	7.5%	Moving Mass	Mms	g
Voice Coil Inductance	Le	mH	0.03		Suspension Compliance	Cms	um/N
Resonant Frequency	Fs	Hz	177.55	15%	Effective Cone diameter	D	cm
Mechanical Q Factor	Qms		2.63		Effective Piston Area	Sd	cm^2
Electrical Q Factor	Qes	1.14			Effective Volume	Vas	L
Total Q Factor	Qts		0.79		Motor Force Factor	BL	Tm
Ratio Fs/Qts	F	Fs/Qts	223.9		Motor Efficiency Factor	$\beta$	(T*M^2)/Ohms
Half Space Sensitivity @2.83V	db@2.83V/1M	dB	85.31	+/- 1.0db	Voice coil former Material	VCfm	ASV
Half Space Sensitivity @1W/1M	db@1W/1M	dB	82.4	+/- 1.0db	Voice coil inner diameter	VCd	mm
Gap Height	Gh	mm	3		Rated Noise Power	P	W
Maximum Linear Excursion	Xmax	mm	1.1		Test Spectrum Bandwidth	100hz-20Khz	
Ferrofluid Type	FF				Driver Size	Inch	2 in
Driver Mass	Kg	0.08					

## Frequency and Impedance Response

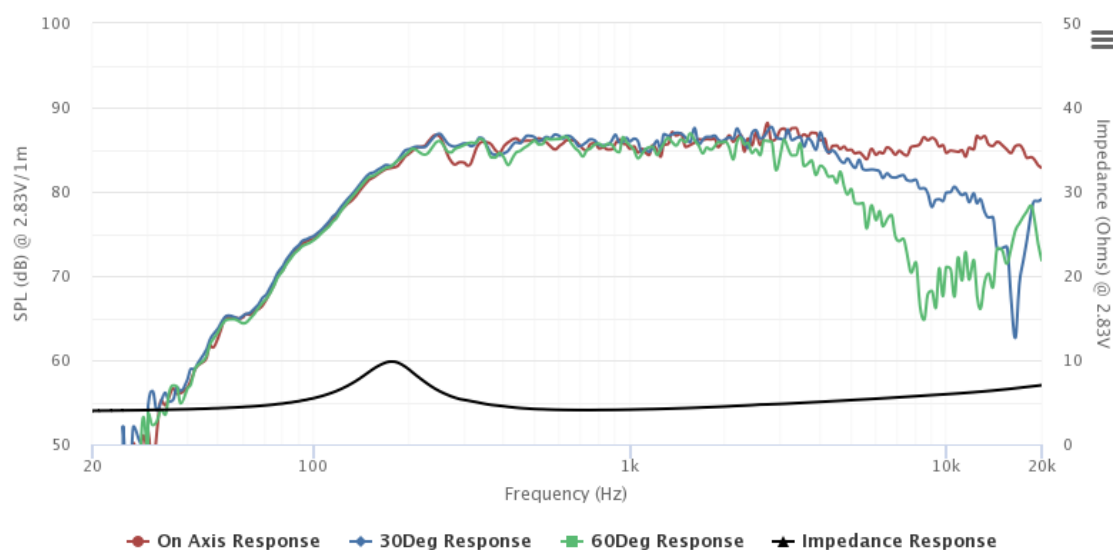

Highcharts.com