

**Mallory Sonalert Products, Inc.**

Part #:

**SBT12THFL****Sales Outline Drawing**


Revision:

**C****Specifications:****cUL Recognized to IEC60601-1-8 AMD1  
Temp/Energy Delivery Melody - High Priority Only**

|                        |                                                        |
|------------------------|--------------------------------------------------------|
| Sound Level Category:  | Loud                                                   |
| Mode of Operation:     | High Priority Alarm - 10 beeps repeating every 2.5 sec |
| Voltage Rating:        | 9 to 12 VDC                                            |
| Frequency:             | 150 to 4000 Hz                                         |
| Loudness @ 10cm:       | 85 to 95 dB(A) Typ.                                    |
| Average Current Draw:  | <25mA Typ.                                             |
| Ipk Current*:          | 75mA                                                   |
| Housing Material:      | ABS 777D Plastic Resin, Black                          |
| Storage Temperature:   | -40° to +85° C                                         |
| Operating Temperature: | -30° to +65° C                                         |
| Weight Typical:        | 0.6 oz (17g)                                           |
| Options:               | Please contact factory.                                |

**Dimensions:** Inches (mm)**cUL Recognized****ROHS Compliant**

PATENT NUMBER: 7880593

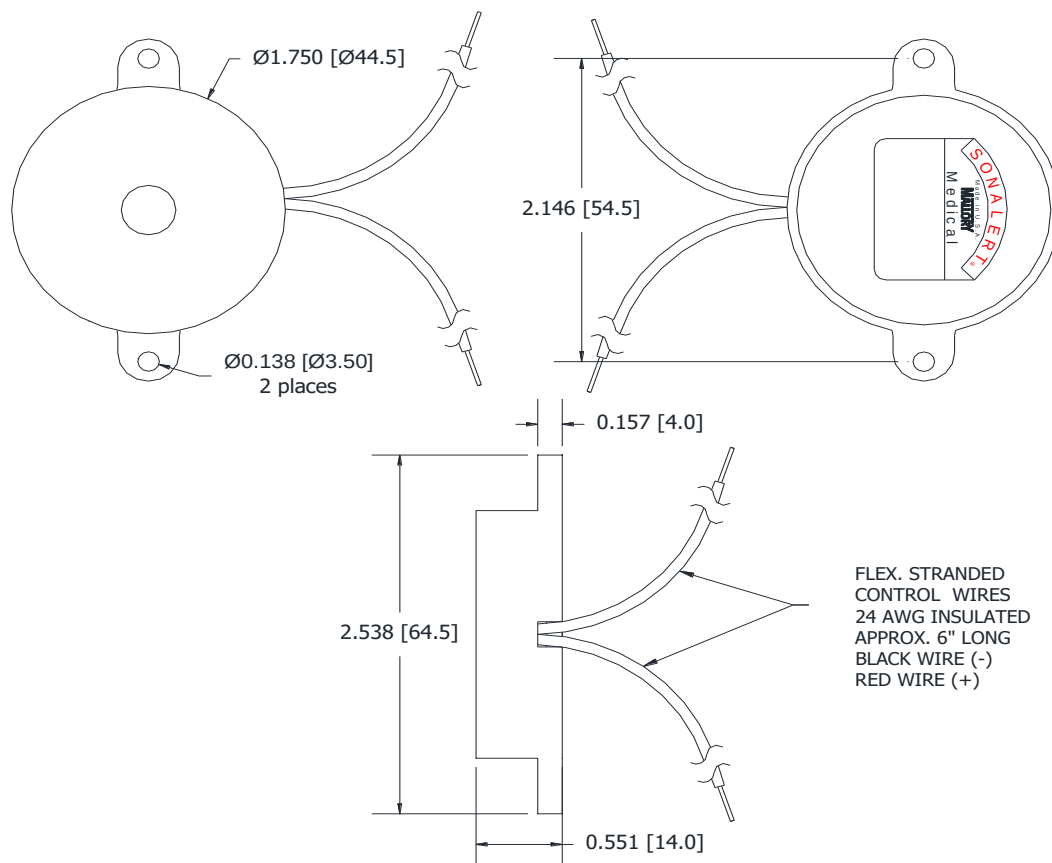

\*Ipk = Instantaneous Peak

tolerances:

±0.01 [±0.3]

±0.005 [±0.1]