

This speaker is designed to operate over a broad frequency range. It's light weight with a thin profile but robust enough to handle 50W (EIA). The piezo construction makes it advantageous for a variety of harsh enviroment applications.



## Electrical Specifications

Speaker Type:	Piezo Loudspeaker		Sound Output (SPL):	82dB (@2.83V, 1W/1m)
Operating Voltage:	2 - 30 VDC (Vp-p)		Rated Current:	10 mA (max.)
Rated Voltage:	18VDC (Vp-p)		Nominal Power:	50 W (8Ω ref.)
Frequency Range:	500 Hz - 20 KHz			


## Environmental Specifications

<b>Min. Operating Temp:</b>	-40°C / -40°F		<b>Storage Temp:</b>	-40°C - +80°C
<b>Max. Operating Temp:</b>	70°C / 158°F			

## Material Specifications

<b>Basket Material:</b>	MPPO		<b>Magnet Material:</b>	Piezo Element
<b>Cone Material:</b>	Paper		<b>Weight:</b>	32 g

## Dimensions

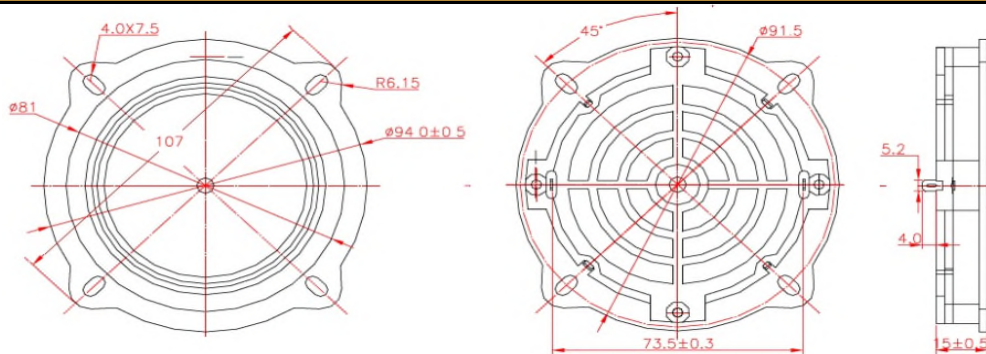

## Frequency Response Curve

