



soberton inc.

WST BUZZER

Acoustic Product Specification

Product Number: WST-1307S



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1
Specifications

Mechanical Characteristics

Page 2
Environment Test

Reliability Test

Page 3
Recommended Temperature Profile

Inspection Fixture

Recommended Land Pattern

Page 4
Frequency Response Curve

Page 5
Dimensions

Page 6
Packing

Specifications

Item	Unit	Specification	Condition
Rated Voltage	VDC	5.0	
Operating Voltage	VDC	4.0 ~ 7.0	
Mean Current	mA	30 Max	At rated voltage
Sound Output	dBA	85	At 10cm at rated voltage
Rated Frequency	Hz	2400 ±300	
Operating Temp	°C	-30 ~ +70	
Storage Temp	°C	-40 ~ +85	
Dimension	mm	12.8 × 12.8 × H7.0	See attached drawing
Weight	gram	2.0	
Material		PPS (Gray)	
Terminal		SMD Type (Plating Sn)	See attached drawing
Environmental Protection Regulation		RoHS	

Test condition:

Temperature: +25±2 °C Related humidity: 65±5% Air pressure: 86-106KPa

Mechanical Characteristics

Item	Test condition	Evaluation standard
Solderability	Lead terminals are immersed in rosin for 5 seconds and then immersed in the solder bath at +250±5°C for 3±0.5 seconds.	90% min. lead terminals shall be wet with solder.
Soldering Heat Resistance	Lead terminal are immersed in the soldering bath at +250±5°C for 2±0.5 seconds.	No interference in operation.
Terminal Mechanical Strength	Apply the terminal with 1KG tension for 1 minute.	No damage and cutting off.
Vibration	The part shall be subjected to a vibration cycle of 10Hz to 55Hz to 10Hz in a period of 1 minute. Total peak amplitude shall be 1.52mm(9.3G). The vibration test shall consist of 2 hours per axis in each three axes(X,Y,Z). Total 6 hours.	After the test, the part shall meet specifications without any damage in appearance and performance except SPL. The SPL should be in ±10dBA compared with initial one.
Drop Test	The part is dropped from a height of 75cm onto a 40mm thick wooden board 3 times in 3 axes(X,Y,Z). Total of 9 times.	



soberton inc.

WST BUZZER

Acoustic Product Specification

Product Number: WST-1307S



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1

Specifications

Mechanical Characteristics

Page 2

Environment Test

Reliability Test

Page 3

Recommended Temperature Profile

Inspection Fixture

Recommended Land Pattern

Page 4

Frequency Response Curve

Page 5


Dimensions

Page 6


Packing

Environment Test

Item	Test condition	Evaluation standard
High Temp. Test	The part is placed in a chamber at +85°C for 96 hours.	After the test the part shall meet specifications without any degradation in appearance and performance except SPL. After 4 hours at +25°C, the SPL should be in $\pm 10\text{dBA}$ compared with initial one.
Low Temp. Test	The part is placed in a chamber at -40°C for 96 hours.	
Thermal Shock	The part shall be subjected to 10 cycles. Each cycle shall consist of:	



Temp./Humidity Cycle
The part shall be subjected to 10 cycles. One cycle shall be 24 hours and consist of:

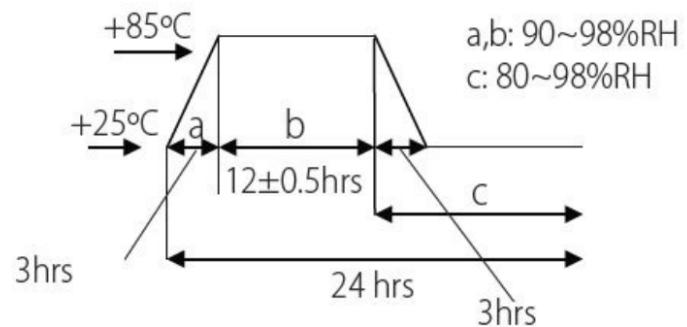

Reliability Test

Item	Test condition	Evaluation standard
Operating Life Test	Ordinary Temperature The part shall be subjected to 96 hours of continuous operation at $+25^\circ\text{C} \pm 10^\circ\text{C}$.	After the test, the part shall meet specifications without any degradation in appearance and performance except SPL. After 4 hours at +25°C, the SPL should be in $\pm 10\text{dBA}$ compared with initial one.
	High Temperature The part shall be subjected to 72 hours of continuous operation at +60°C at 5.0V 2400 Hz applied.	
	Low Temperature The part shall be subjected to 72 hours of continuous operation at -20°C at 5.0V, 2400 Hz applied.	
	High and Low Voltage Applying 4.0 voltage and 7.0 voltage, available time 24 hours each.	

Standard test condition:

- a) Temperature: $+5 \sim +35^\circ\text{C}$
- b) Humidity: 45~85%
- c) Pressure: 86~106KPa



soberton inc.

WST BUZZER

Acoustic Product Specification

Product Number: WST-1307S



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1

Specifications

Mechanical Characteristics

Page 2

Environment Test

Reliability Test

Page 3

Recommended Temperature Profile

Inspection Fixture

Recommended Land Pattern

Page 4

Frequency Response Curve


Page 5

Dimensions

Page 6


Packing

Recommended Wave Soldering Temperature Curve

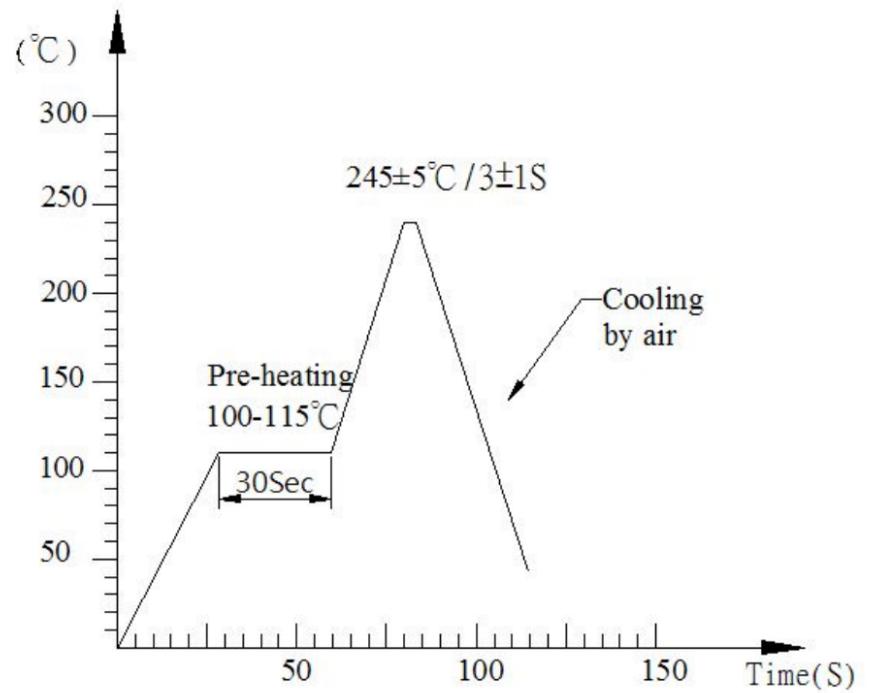

Inspection Fixture


Input Signal: 5.0 VDC, 2400Hz

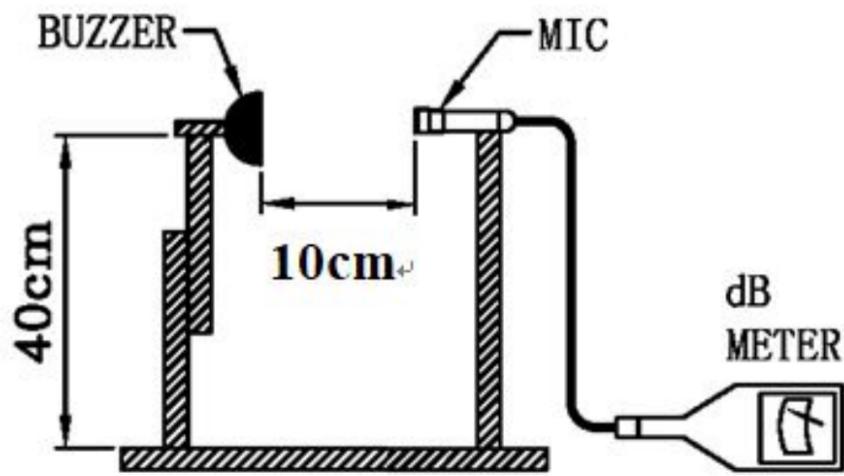

Mic: RION S.P.L meter UC30 or equivalent

S.G: Hewlett Packard 33120A Function Generator or equivalent

Recommended Land Pattern/Pad Layout

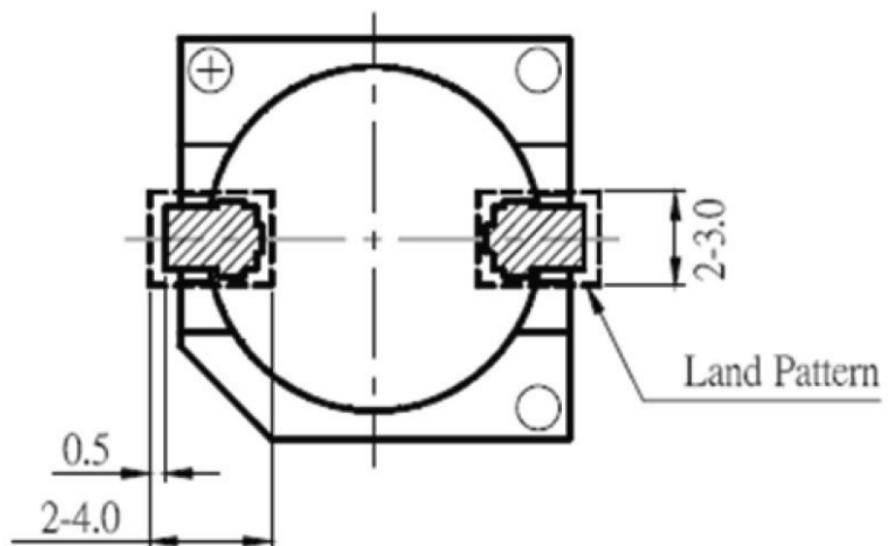



soberton inc.

WST BUZZER

Acoustic Product Specification

Product Number: WST-1307S



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1

Specifications

Mechanical Characteristics

Page 2

Environment Test

Reliability Test

Page 3

Recommended Temperature Profile

Inspection Fixture

Recommended Land Pattern

Page 4

Frequency Response Curve



Page 5

Dimensions

Page 6

Packing

Typical Frequency Response Curve

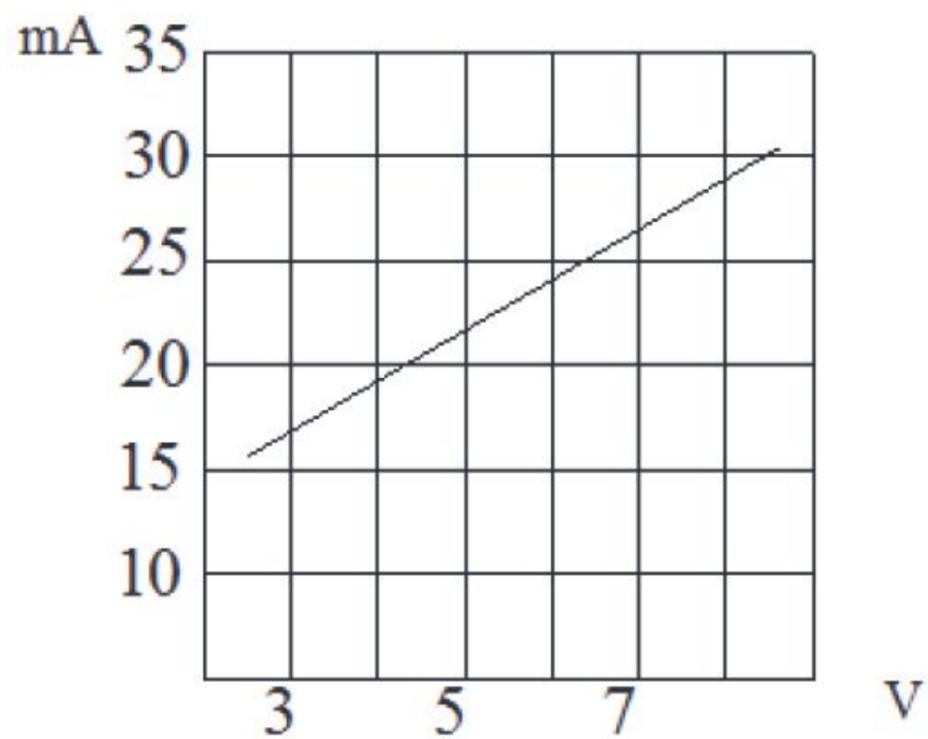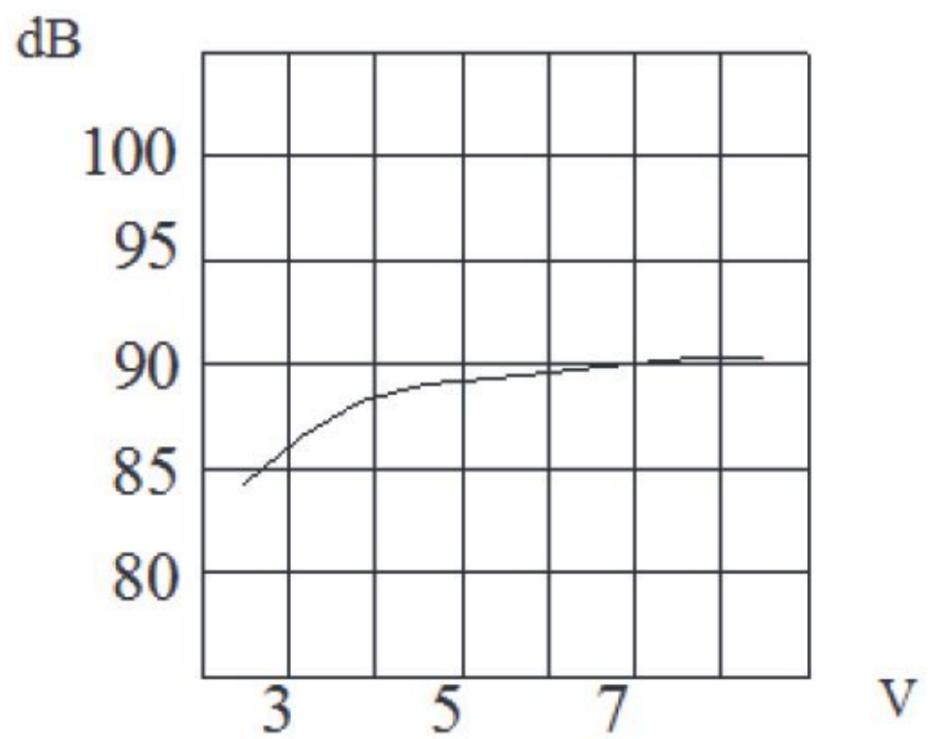



soberton inc.

WST BUZZER

Acoustic Product Specification

Product Number: WST-1307S



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1

Specifications

Mechanical Characteristics

Page 2

Environment Test

Reliability Test

Page 3

Recommended Temperature Profile

Inspection Fixture

Recommended Land Pattern

Page 4

Frequency Response Curve

Page 5



Dimensions

Page 6

Packing

Dimensions

Tolerance: ± 0.5 (unit: mm)

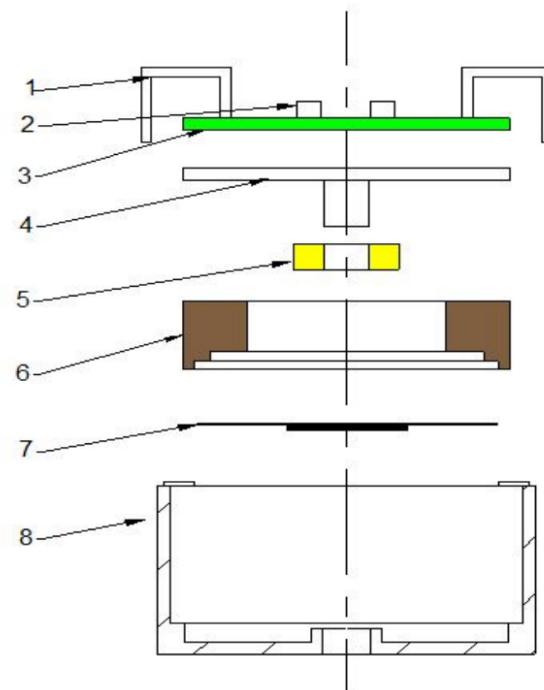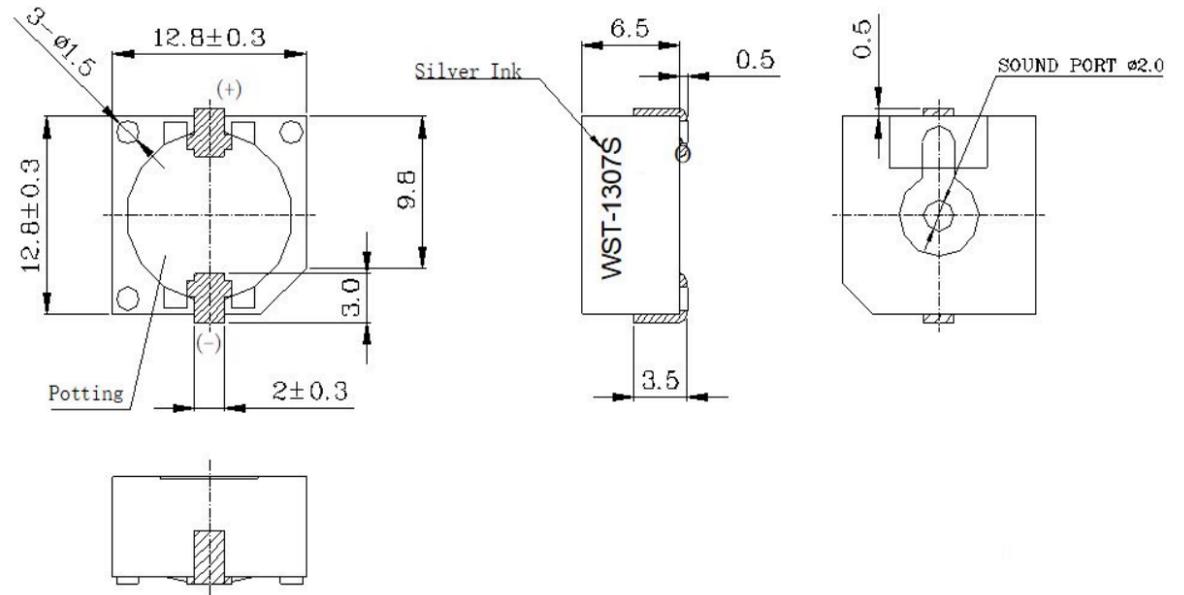

No.	Part Name	Material	Quantity
1	Lead	Copper	2
2	Transistor	Epoxy + Copper	2
3	PCB	Epoxy Glass Fiber Cloth + Copper	1
4	Core	Ferrum	1
5	Coil	Copper	1
6	Magnet Ring	Poly + Ferrite	1
7	Diaphragm	Ferrum	1
8	Case	PPS	1



soberton inc.

WST BUZZER

Acoustic Product Specification

Product Number: WST-1307S



Release | Revision: B/2018

CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

Page 1

Specifications

Mechanical Characteristics

Page 2

Environment Test

Reliability Test

Page 3

Recommended Temperature Profile

Inspection Fixture

Recommended Land Pattern

Page 4

Frequency Response Curve




Page 5

Dimensions

Page 6

Packing

Packing

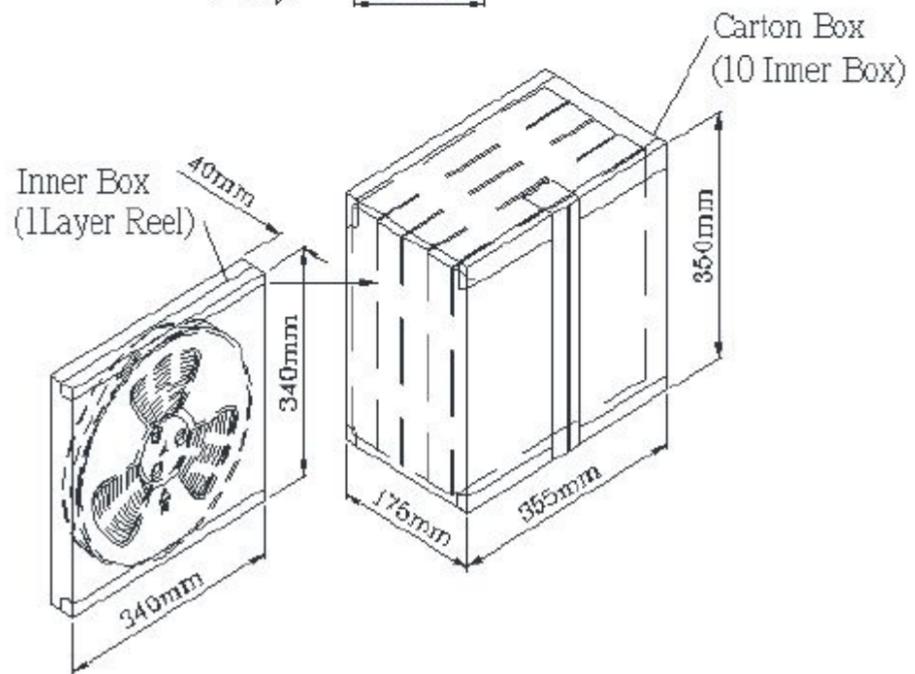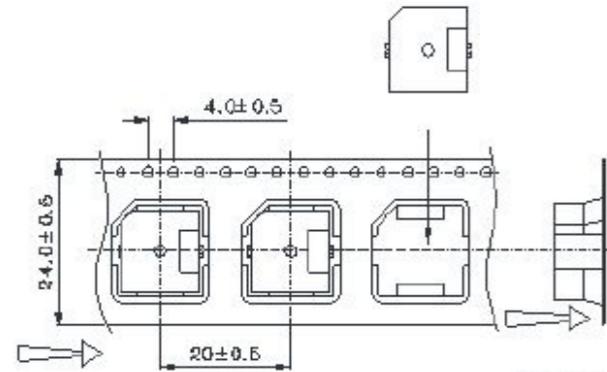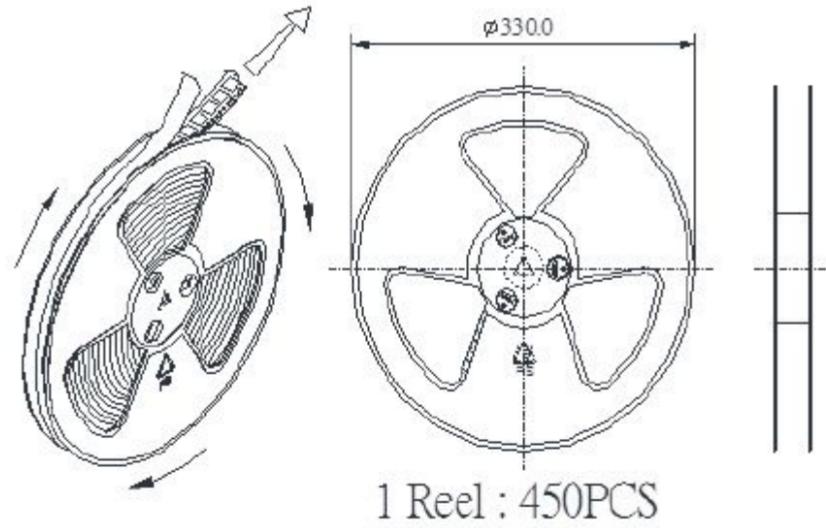

Packing Box	LxWxH (mm)	Pieces
Inner Box	340x340x40	1 x 450 = 450pcs
Carton Box	350 x 355 x 175	10 x 450 = 4,500pcs