




PRODUCT NUMBER: 0740-0-18-80-36-27-10-0

www.mill-max.com
DATA SHEET

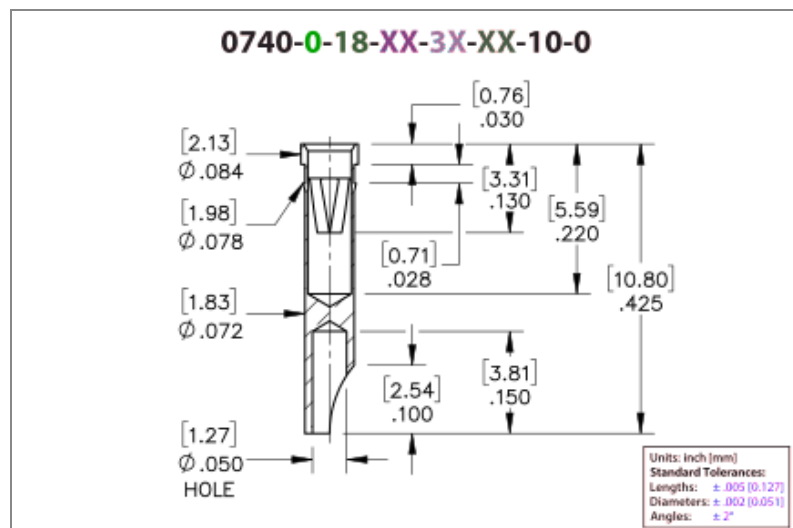

0740-0-18-80-36-27-10-0 SPECIFICATIONS


General Info		Materials	Technical Specs
Description ¹ :	Wire Termination	Shell Material ⁴ : Brass Alloy	Operating Temperature Range ⁷ : -55/+125° C
	Receptacle - Soldercup Type		
Mounting Feature:	Press-Fit into a Non-Plated Through Hole (NPTH)	Shell Plating ⁵ : 200 - 300 μ " Tin (matte finish) over Nickel	Current Rating ⁸ : 8A @ 10°C Temperature Rise
Mounting Hole:	.075" (1,905mm)	Contact Plating ⁶ : 30 μ " Gold over Nickel	Contact Resistance ⁹ : 10 m Ω Max
Pin Diameter Range:	.032"-.046" (0,813-1,168mm)		Shock ¹⁰ : No Elect. Discontinuity > 1 μ s @ 50g
Packaging:	Packaged in Bulk		Vibration ¹¹ : No Elect. Discontinuity > 1 μ s @ 10-2000HZ, 20 G
RoHS ² :	Yes		
Product Lifecycle ³ :	Active		

NOTES:


- 1. Standard Tolerances:
Lengths +/- .005" (0,13)
Diameters: +/- .002" (0,051)
Angles: +/- 2°
- 2. Mill-Max products labeled with the RoHS symbol are compliant with all three ROHS Directives. All of our products previously described as RoHS (2002/95/EC) and RoHS-2 (2011/65/EC) are also compliant with RoHS-3 (2015/863/EU).
- 3. Part is Active and in Production, No Scheduled Obsolescence
- 4. Brass Alloy 360 per ASTM B 16, or 385 per ASTM B455
- 5. TIN (100%) per ASTM B 545, Matte finish (With whisker and oxide inhibitors); NICKEL per ASTM B 689, Type 2 (Bright)
- 6. GOLD per ASTM B 488, Type 1 (99.7% min. gold), Code C (130-200 HK {Knoop hardness}), NICKEL per ASTM B 689, Type 2 (Bright)
- 7. Per IEC 60512-11-(4,-9,-10,-12)
- 8. Per IEC 60512-5-1, Current Carrying Capacity (evaluated at 10° C Temp. Rise)
- 9. Per EIA-364-23C, Low Level Contact Resistance
- 10. Per IEC 60512-6-3: Test 6c: Shock
- 11. Per IEC 60512-6-4: Test 6d: Vibration (sinusoidal)

CONTACT:

#36 CONTACT
FOR .022"-.042" DIAMETER PINS (δ = .022)
4-FINGER (BeCu), GROUP E

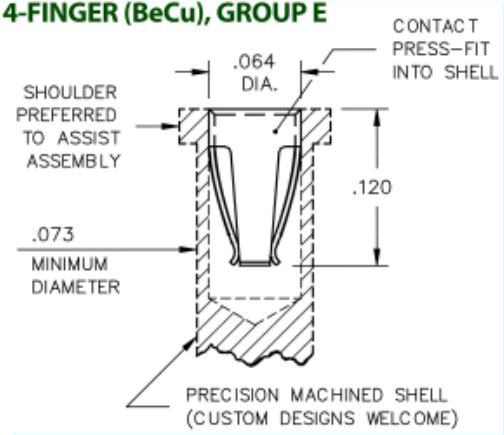

The insertion / extraction force characteristics above were derived using a 30 microinch gold-plated contact and polished steel gauge pins having a bullet-shaped tip. The curves represent typical average values; they are best used to compare the differences between similar size contacts and to guide you in selecting one that is suitable for your application. Your results may vary, so for your specification, we encourage you to obtain complimentary samples for your evaluation.

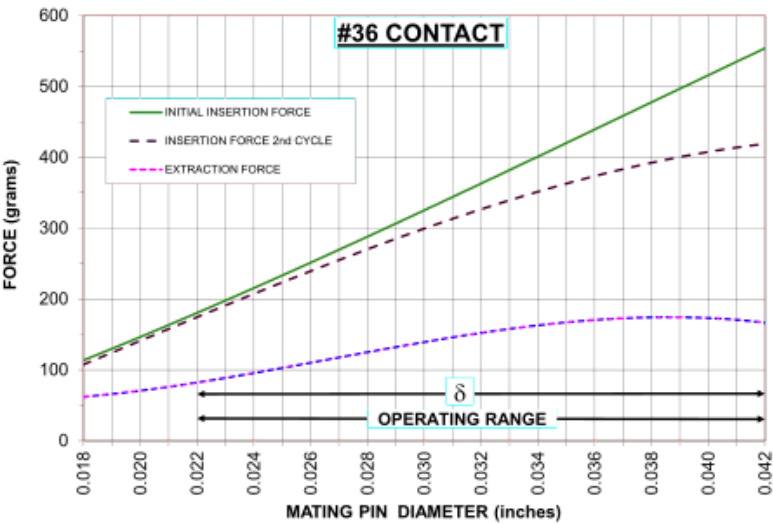

Material	Beryllium Copper	Current Rating (amps)	16.00
Fingers	4	Compliance (δ)	0.020
Length	.120" (3,048mm)	Contact Group	E

ADDITIONAL NOTES AND SPECIFICATIONS

In the interest of improved design, quality and performance , Mill-Max reserves the right to make changes in its specifications without prior notice. Specifications and tolerances are provided wherever possible. The tolerance on dimensions of critical to function features is typically held tighter than the stated standard tolerances, such as press-fits, holes and lengths affecting the coplanarity of SMT products. Due to the wide variety of interconnects Mill-Max offers, the specific tolerances vary from product to product. If you need information regarding the tolerance of a particular part, please contact Technical Services.

RELATED LINKS AND DOCUMENTS

Application Note: (https://www.mill-max.com/sites/default/files/external/assets/2019-07/pins_receptacles_and_connectors_with_integrated_solder_cups.pdf)

Environmental Compliance: (<https://www.mill-max.com/rohs>)