

5

4

3

2


1

D


C

B


A

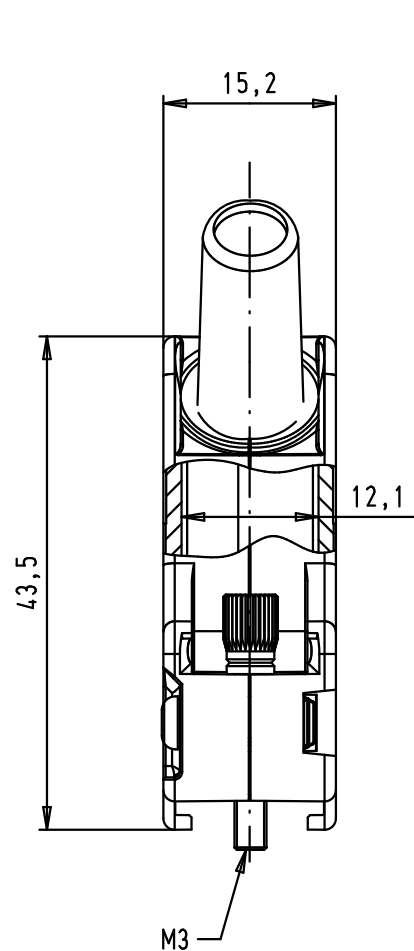


Max. torque = 0,4 N.m
(3 screws)

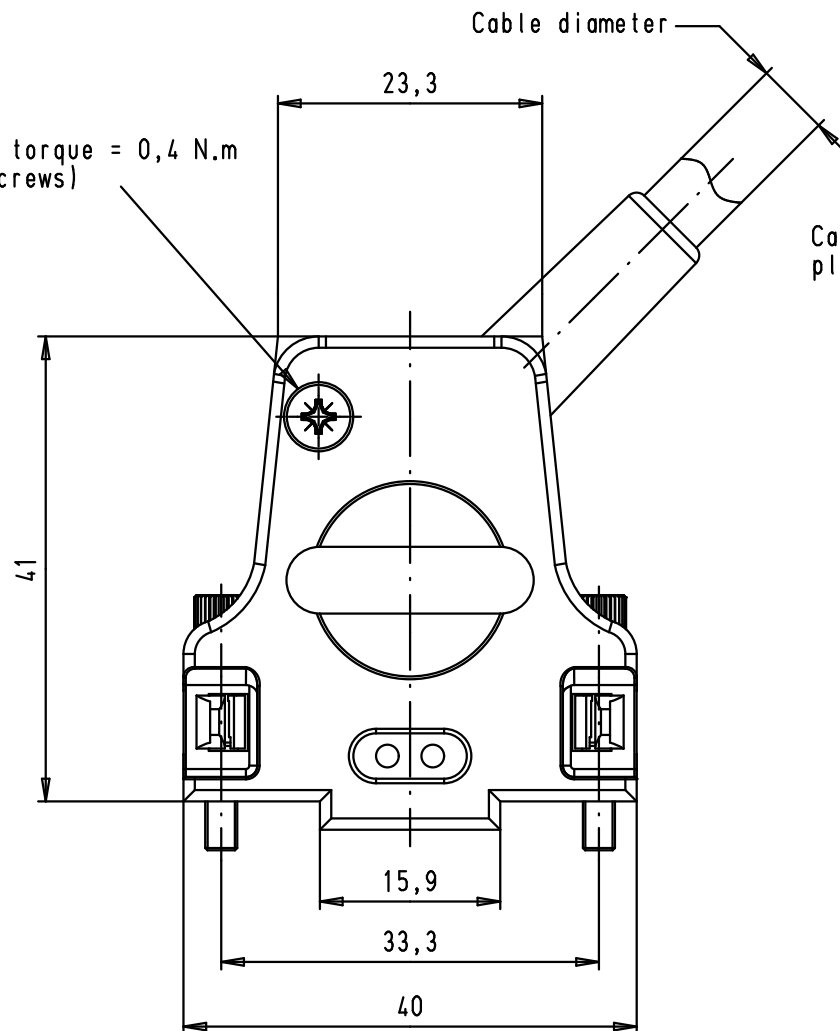

Cable reduction
plate (x2)

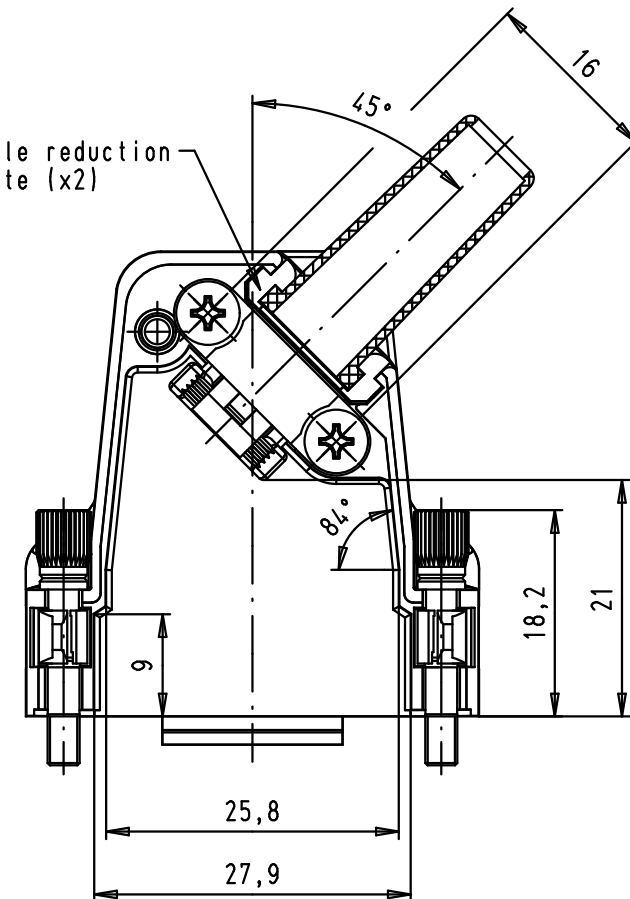

Minimum cable diameter: 3
Maximum cable diameter:
- with rubber bushing: 6,5
- without rubber bushing: 8,5
- without reduction plate: 12,5

				Det.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, 15 poles, side entry cable, straight metal hood	Maßstab/ Scale 1,5:1
			Detail.	18/04/08	PK			
			Insp.					
			Stand.					
EC00376	24/07/09	PK	HARTING EURL F-95972 Paris				TB 09 67 015 0339	Blatt/ Page 1 / 1
34914	18/04/08	PK						
Mod.	Det.	Name				Sub.		