

5

4

3

2


1

D



C

B

A

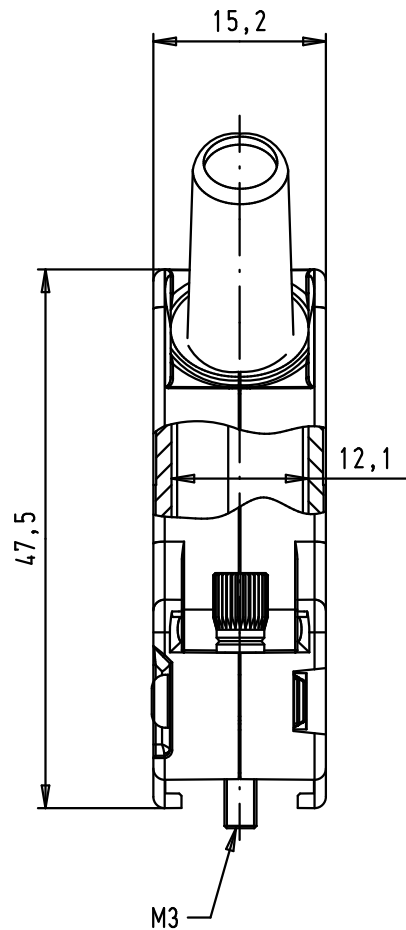

Max. torque = 0,4 N.m
(3 screws)

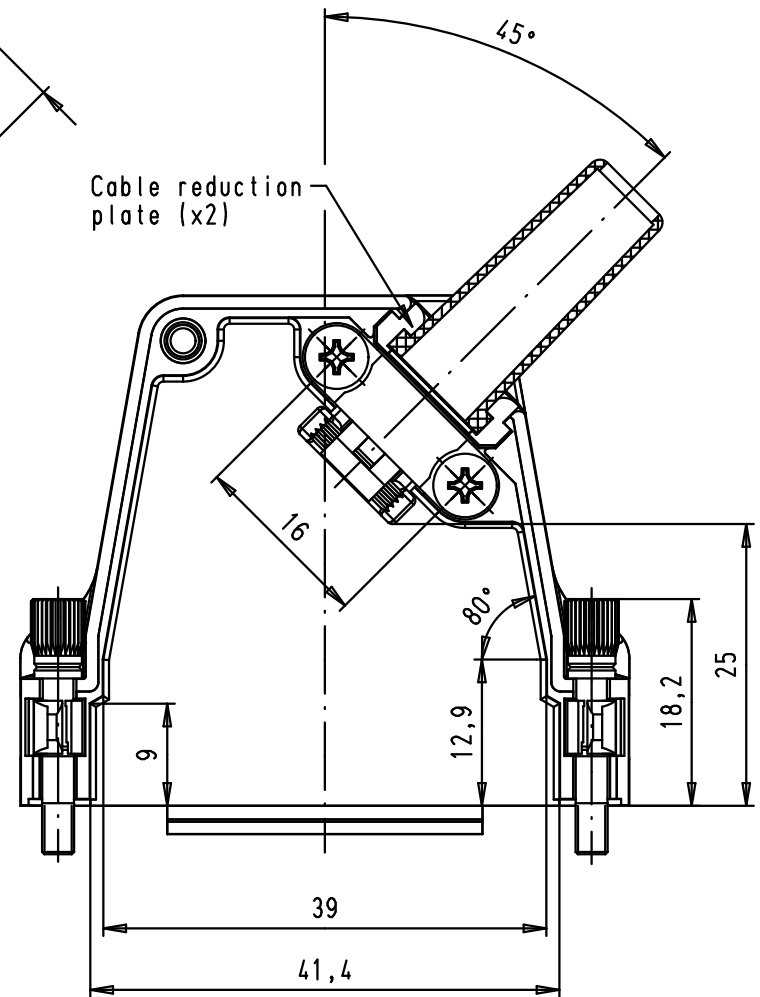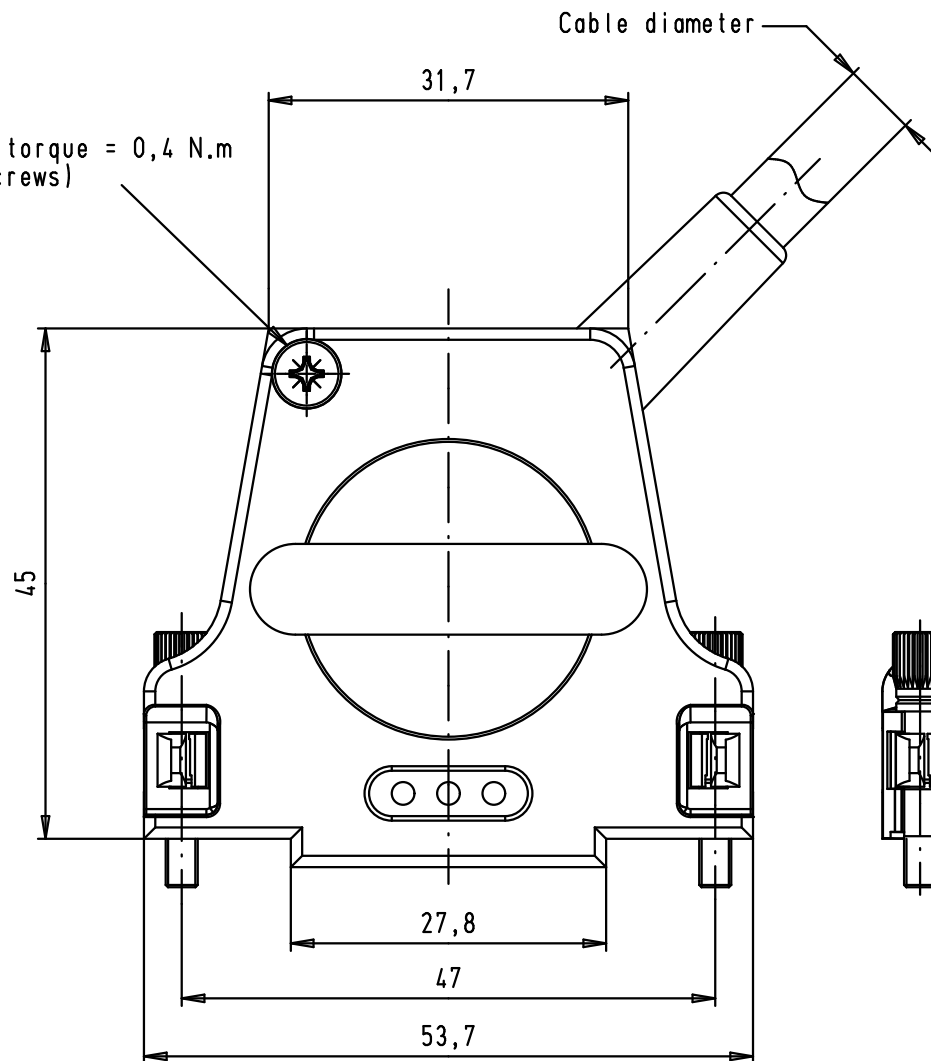

Minimum cable diameter: 3
Maximum cable diameter:
- with rubber bushing: 8
- without rubber bushing: 8,5
- without reduction plate: 12,5

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, 25 poles, side entry cable, straight metal hood	Maßstab/ Scale 1,5:1
			Detail.	18/04/08	PK			
			Insp.					
			Stand.					
EC00376	24/07/09	PK	HARTING EURL F-95972 Paris				TB 09 67 025 0339	Blatt/ Page 1 / 1
34914	18/04/08	PK						
Mod.	Dat.	Name					Sub.	