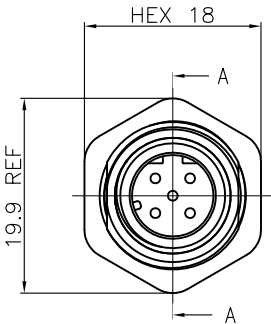
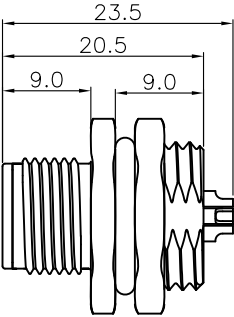
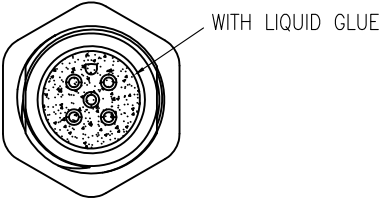

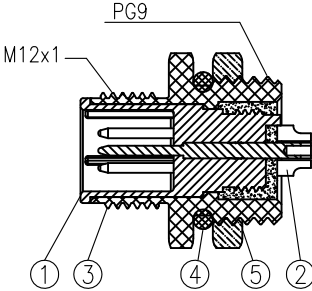












1		2		3		4		5																															
						<p>Specifications: Current Rating:5A Voltage Rating:60V Contact Resistance:5m ohm. Max. Insulation Resistance:100M ohm. Min. Withstanding Voltage:500V AC/Minute Operating Temperature Range:−40°C ~ +100°C Waterproof Rate:IP67 Material and Finish See Table</p> 		A																															
		Section A-A						B																															
PIN ASSIGNMENTS FRONT VIEW				<table><tr><th>ITEM</th><th>DESCRIPTION</th><th>MATERIAL</th><th>REMARK</th><th>Q'TY</th></tr><tr><td>1</td><td>Insulator</td><td>Nylon66</td><td>UL94V−0 Black</td><td>1</td></tr><tr><td>2</td><td>Terminal</td><td>Copper Alloy</td><td>Gold Plated 3u"</td><td>3~12</td></tr><tr><td>3</td><td>Shell</td><td>Copper Alloy</td><td>Nickel Plated 60u"</td><td>1</td></tr><tr><td>4</td><td>Seal ring</td><td>Silica Gel</td><td>Red</td><td>1</td></tr><tr><td>5</td><td>Nut</td><td>Copper Alloy</td><td>PG9 Nickel Plated 60u"</td><td>1</td></tr></table>		ITEM	DESCRIPTION	MATERIAL	REMARK	Q'TY	1	Insulator	Nylon66	UL94V−0 Black	1	2	Terminal	Copper Alloy	Gold Plated 3u"	3~12	3	Shell	Copper Alloy	Nickel Plated 60u"	1	4	Seal ring	Silica Gel	Red	1	5	Nut	Copper Alloy	PG9 Nickel Plated 60u"	1			C	
ITEM	DESCRIPTION	MATERIAL	REMARK	Q'TY																																			
1	Insulator	Nylon66	UL94V−0 Black	1																																			
2	Terminal	Copper Alloy	Gold Plated 3u"	3~12																																			
3	Shell	Copper Alloy	Nickel Plated 60u"	1																																			
4	Seal ring	Silica Gel	Red	1																																			
5	Nut	Copper Alloy	PG9 Nickel Plated 60u"	1																																			
<table><tr><td rowspan="4">D CODING</td><td> 3Pin</td><td> 4Pin</td><td> 5Pin</td></tr></table>		D CODING	 3Pin	 4Pin	 5Pin					RoHS Compliant																													
D CODING	 3Pin		 4Pin	 5Pin																																			
			DRAWN:		GENERAL TOLERANCE: .X=±0.30 .XX=±0.2		<div>CnC Tech</div> <div>Industrial Cable and Connector Technology</div>																																
			CHECKED:		UNIT: MM				DESCRIPTION: M12 D CODE PLUG REAR FASTENED SOLDER TYPE		SIZE A4																												
			APPROVAL:		SCALE:1:1																																		
A		09-Jan-2018				SHEET: 1 / 1		PART NO:																															
REV		DATE		FILE		BY		PROJECTION:		