





CONTENT

Augmented Reality (AR) - Digital meets real	2
3D preview of 2624-3102 to 2624-311	3
Integrate Wago catalog inside your CAD System	4
2D derivations and Bill-Of-Material (BOM)	5
Technical drawings	6
Technical data	7
Get a free E-Learning training for Wago catalog	8

www.CADENAS.de www.3Dfindit.com

VISIT US AT 3Dfindit.com NOW!








AR

Augmented Reality, often shortened to AR, is a technology that blends digital information into the real world. For more information, please click here or directly try yourself by scanning the QR code with your phone.

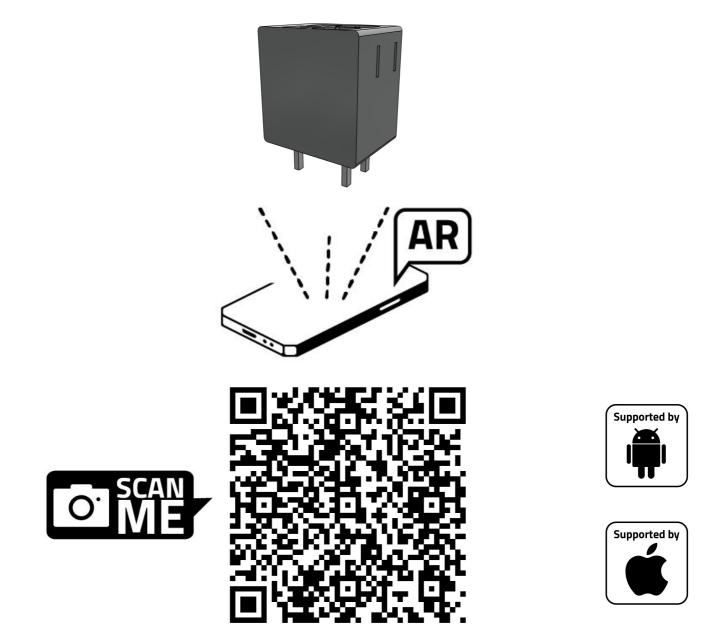

Please scan the QR code above and open on AR-enabled device. There is a possibility that the configuration will fail. If that happens, please try a different product.

www.CADENAS.de www.3Dfindit.com

K VISIT US AT 3Dfindit.com NOW!







3D view



€ Zoom

Moves you toward or away from objects in the scene when you drag vertically. You can also zoom with the hand tool by holding down Shift as you drag.

🕂 Pan

Moves the model vertically and horizontally only. You can also pan with the hand tool: Ctrl-drag.

C Rotate

Turns 3D objects around relative to the screen. How the objects move depends on the starting view, where you start dragging and the direction in which you drag.

www.CADENAS.de www.3Dfindit.com

K VISIT US AT 3Dfindit.com NOW!

3







CAD plugins

With our CAD integrations, you can use 3D findit directly in your CAD system and make your work easier with additional comfort functions, such as replacing a part and many more.



To the plugins

www.CADENAS.de www.3Dfindit.com

« VISIT US AT 3Dfindit.com NOW!

4







2D derivation ISO view

Bill-Of-Materials

N°	Description	Amount
1.1	2624-3102	1



VISIT US AT 3Dfindit.com NOW!







Technical drawings

www.CADENAS.de www.3Dfindit.com

« VISIT US AT 3Dfindit.com NOW!







Technical data

BESTNR (Item-No.)	2624-3102
INFODE (WAGO eShop)	Info DE
INFOEN (WAGO eShop)	Info EN
QUERSCHNITT1 (Cross section / mm ²)	0.2 - 6
QUERSCHNITT2 (Cross section / AWG)	24 - 10
ABISOLIERLAENGE (Strip length / mm)	10 - 12
SPANNUNG (Measured voltage / V)	400
BEMESSSTOSSSPG (Rated impulse voltage / kV)	4
VERSCHMUTZGRAD (Pollution degree)	2
STROM (Current intensity / A)	32
RM (Pin Spacing / mm)	5.00
P (No. of poles)	2
HOEHE (Height / mm)	16.30
BREITE (Width / mm)	16.50
TIEFE (Depth / mm)	15.40
ANZAHLKLEMMSTEL (Number of connection	2
points)	
ANZAHLPOTENTIAL (Number of potentials)	2
FARBE (Color)	gray
GEWICHT (Weight / g)	3.438
BEMERKUNGEN (Comment)	L= (No. of poles - 1) x Pin Spacing + 6.5 mm
BOHRLOCHDURCHM (Dimensions)	1.5 +/-0.1 mm
ECLASS71 (eCl@ss 7.1)	27-44-04-01
ECLASS81 (eCl@ss 8.1)	27-44-04-01

www.CADENAS.de www.3Dfindit.com

VISIT US AT 3Dfindit.com NOW!







E-Learning

Discover free training for 3Dfindit, the search engine for engineers, designers, and architects. Our 30 to 50-minute interactive courses provide you with comprehensive knowledge about the platform. Upon successful completion, you will receive a certificate. Start your first course now and master 3Dfindit!



Learn more

Start course

www.CADENAS.de www.3Dfindit.com

« VISIT US AT 3Dfindit.com NOW!