


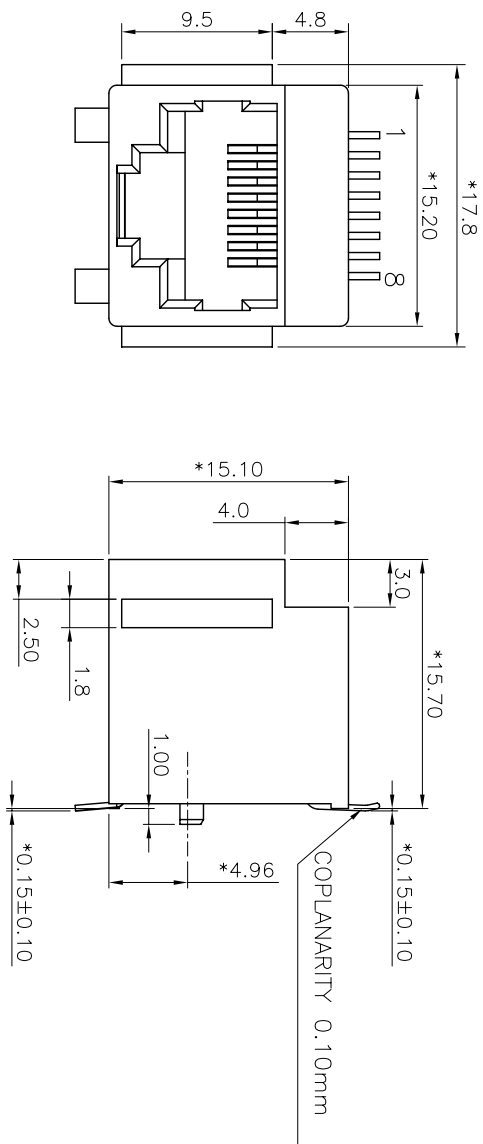


NOTES:

ELECTRICAL:

- | | |
|--------------------------|--------------------------------|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 1.5 AMP. |
| 3. CONTACT RESISTANCE | : 35 MILLIOHMS MAX. |
| 4. INSULATION RESISTANCE | : 1000 MEGOHMS MIN. @ 500 VDC. |
| 5. DIELECTRIC STRENGTH | : 1000 VAC RMS 60Hz, 1MIN. |

MECHANICAL:

- | | |
|------------------------------|-----------------------------|
| 1. HOUSING MATERIAL | : HIGH TEMP. UL94V-0 BK. |
| 2. CONTACT MATERIAL | : PHOSPHOR BRONZE t=0.35mm. |
| 3. PLATING | : GOLD PLATING OVER NICKEL. |
| 4. OPERATING LIFE | : 750 CYCLES MIN. |
| 5. PCB RETENTION POST-SOLDER | : 10 LBS MIN. |

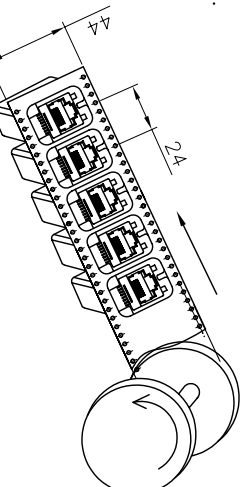

- ENVIRONMENTAL:
- | | |
|-------------------------------------|--------------------------------|
| 1. STORAGE | : -40°C TO +85°C. |
| 2. OPERATION | : -40°C TO +85°C. |
| 3. IR REFLOW SOLDERING TEMPERATURE: | 255°C TO 265°C (5~10 SECONDS). |
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.


ORDERING INFORMATION

PART NUMBER	PRODUCT CODE	CONFIGURATION
325I-0012-01	RJUJ-88-12I-EIV-02I	6U" GOLD PLATING, WITHOUT MYLAR TAPE
325I-0012-02	RJUJ-88-14I-EIV-02I	30U" GOLD PLATING, WITHOUT MYLAR TAPE
325I-0012-03	RJUJ-88-122-EIV-02I	6U" GOLD PLATING, WITH MYLAR TAPE
325I-0012-04	RJUJ-88-142-EIV-02I	30U" GOLD PLATING, WITH MYLAR TAPE

UL RECOGNIZED - FILE #E465899

COMPONENT SIDE SHOWN

PCB LAYOUT

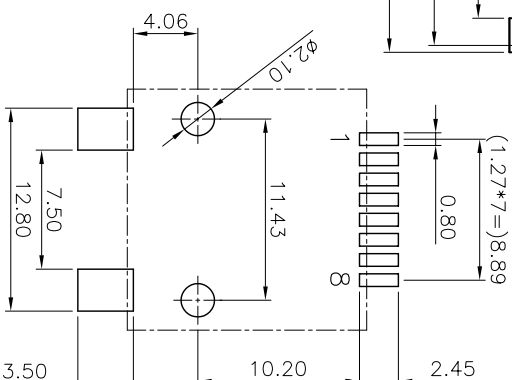

MARK	ECN-NO.	REVISION RECORD	NEW DESIGN	LINGER	DRAWN	DATE
	006900					041007
		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED		
		Dimension Range Tolerance	1.25/1	bront		
		X.X	±0.20 UNIT	APPROVED		
		X.XX	±0.15	jackyhuang		
		X.XXX	±0.10	mm		
		ANGLE	±5°	A3		
		NAME		SHEET		
				1/1		
		Material/Plated/Notes				
		SEE NOTE		TOP ENTRY 8P SMT		
		Tooling No.		PART NO.	SEE NOTE	REV.
				DOC. NO.		