


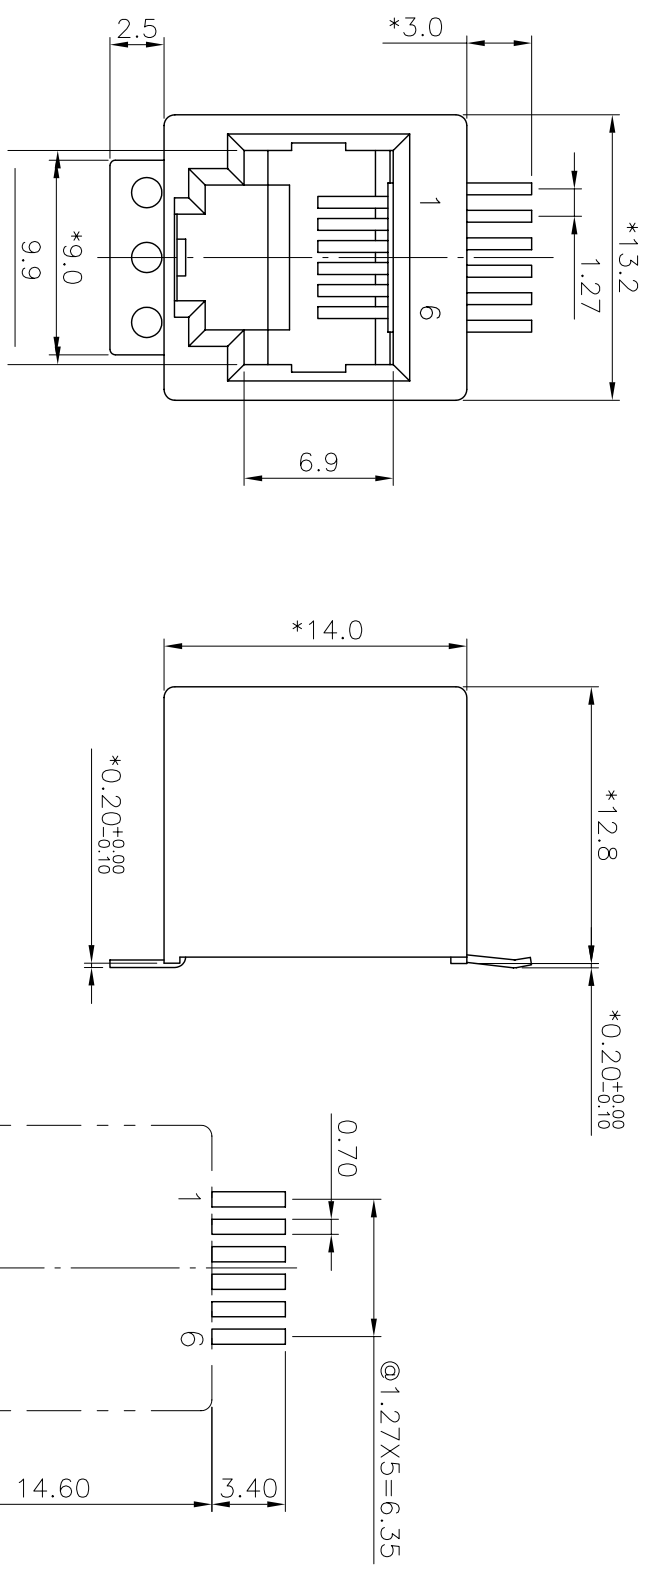

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : HIGH TEMP. UL94V-0 BK.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION: - 0°C TO +70°C.
- 3. IR REFLOW SOLDERING TEMPERATURE: 255°C TO 265°C (5~10 SECONDS).


MATES WITH MODULAR PLUG CONFORMING TO

ORDERING INFORMATION

PART NUMBER	PRODUCT CODE	CONFIGURATION
325I-0016-01	RJJU-66-12I-EIV-014	6U" GOLD PLATING, 6P6C
325I-0016-02	RJJU-66-14I-EIV-014	30U" GOLD PLATING, 6P6C
325I-0016-03	RJJU-64-12I-EIV-014	6U" GOLD PLATING, 6P4C
325I-0016-04	RJJU-64-14I-EIV-014	30U" GOLD PLATING, 6P4C

 UL RECOGNIZED - FILE #E465899

CB LAYOUT
COMPONENT SIDE SHOWN

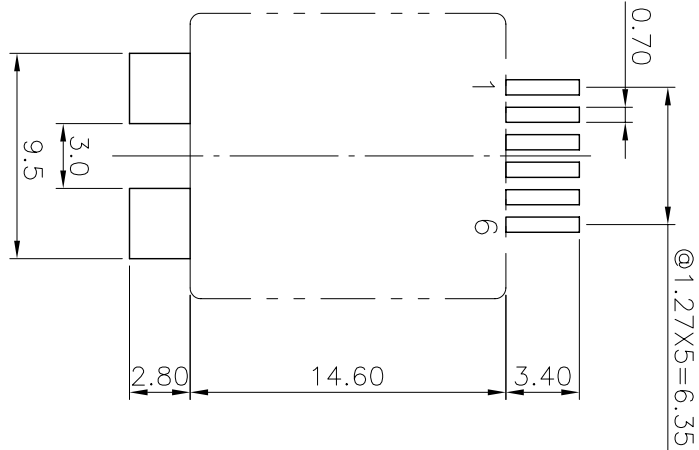

		NEW DESIGN		LINGER		041007	
MARK	ECN-NO.	REVISION RECORD		DRAWN		DATE	
	0069400						