

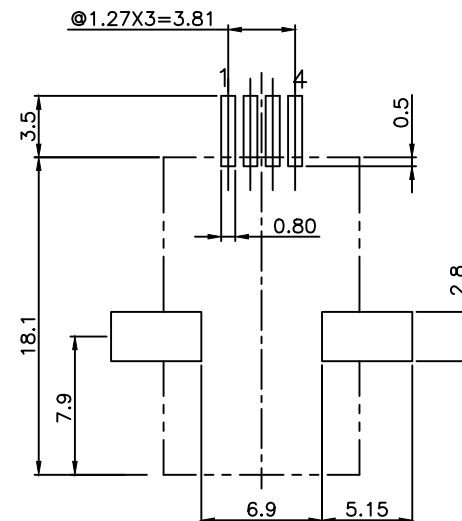
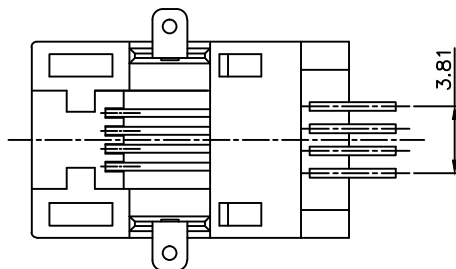


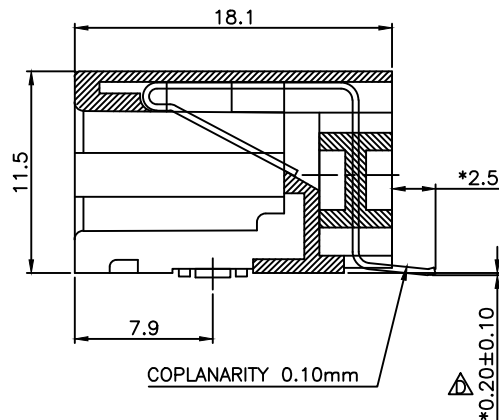

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

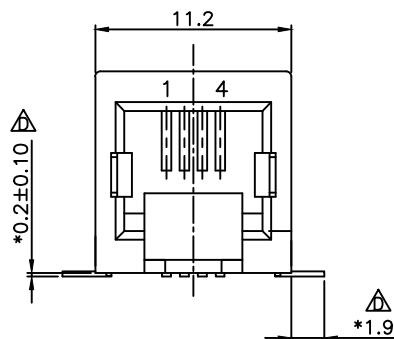

PC Board Layout
Component Side Shown

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0, COLOUR-BK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION TEMPERATURE : -40°C TO +85°C.
3. REFLOW SOLDERING TEMPERATURE : 255°C~265°C (5~10 SECONDS).

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

C UL RECOGNIZED - FILE #E465899

ORDERING INFORMATION:

PART NUMBER


3253-0005-01
3253-0005-02

PRODUCT CODE

RJJU-44-I2I-E3H-007
RJJU-44-I4I-E3H-007

CONFIGURATION

6U" GOLD PLATING
30U" GOLD PLATING

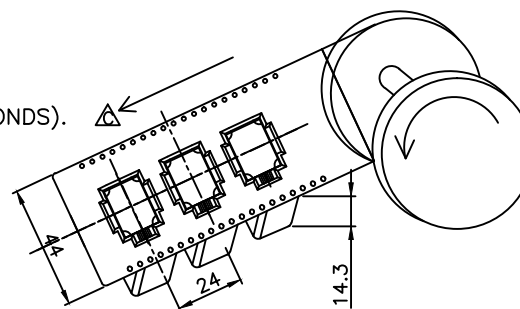

	X 3	MODIFY DRAWING	ROCK	061212'
	X 1	DESIGN MODIFY	QUAN	111711'
	X 1	DESIGN MODIFY	YANG	031809
	X 0	NEW DESIGN	LINGER	122706
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED
		Dimension Range Tolerance	1.25/1	
		X.X ±0.20 UNIT	mm	APPROVED
		X.XX ±0.15		
Material/Plated/Notes		X.XXX ±0.10 SIZE	A3	SHEET 1/1
		ANGLE ±5°		
SEE NOTE		RJ11 SMT JACK PEG OUT		
Tooling No.	PART NO. SEE NOTE		REV. D	
	DOC. NO.			

Design drawing