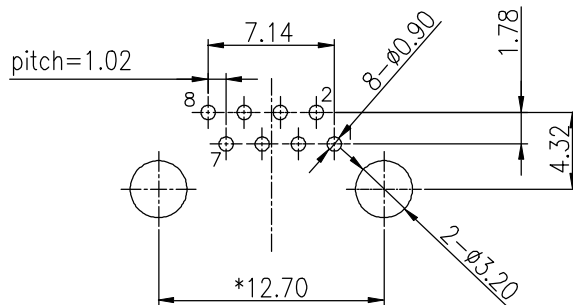


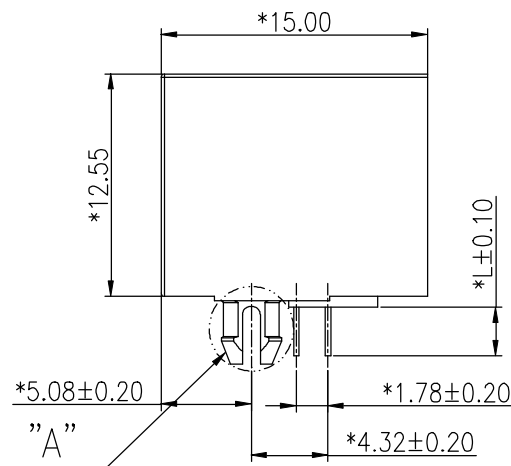
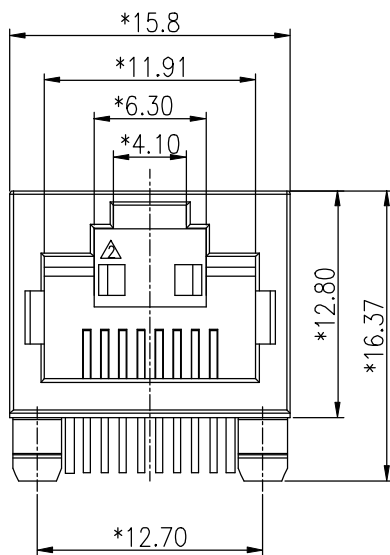


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.PCB Layout
Component Side ShownDETAIL "A"
SCALE 2:1

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

Δ 6. OPERATING: 1500 CYCLES MIN.

MECHANICAL:

1. HOUSING MATERIAL : HIGH TEMP. UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35 mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. PCB RETENTION PRE-SOLDER : 1 LB MIN.
5. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: : -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 255~265°C (5~10 SECONDS)

ΔΔMATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

ORDERING INFORMATION:

PART NUMBER	PRODUCT CODE	CONFIGURATION
3260-0029-01	RJJU-88-I2I-EJH-I42	6U GOLD PLATING, L=2.75
3260-0029-02	RJJU-88-I26-EJH-I42	6U GOLD PLATING, L=3.50
3260-0029-03	RJJU-88-I4I-EJH-I42	30U GOLD PLATING, L=2.75
3260-0029-04	RJJU-88-I46-EJH-I42	30U GOLD PLATING, L=3.50

C  UL RECOGNIZED - FILE #E465899

Δ X2		ADD NEW P/N	DORIS	050615'
Δ X1		ADD PEG DIM.	DORIS	121914'
Δ X1		ADD NEW P/N	KARL	010313'
Δ X1		ADD NEW P/N	KARL	121213'
Δ X2		ADD NEW P/N	ROCK	121812'
Δ X4		ADD NEW P/N	ROCK	080712'
Δ X1		ADD NEW P/N	DORIS	082511'
Δ X0	000000	NEW DESIGN	Andrew	050611
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE

	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED	
	Dimension Range	Tolerance	1/1		
	X.X	±0.20	UNIT	APPROVED	
	X.XX	±0.15	mm		
	X.XXX	±0.10	SIZE		
	ANGLE	±5°	A3		SHEET
Material/Plated/Notes		NAME			
SEE NOTE		1X1 RJ45 JACK, UTP			
Tooling No.		PART NO.	SEE NOTE		REV.
		DOC. NO.			7

Design drawing