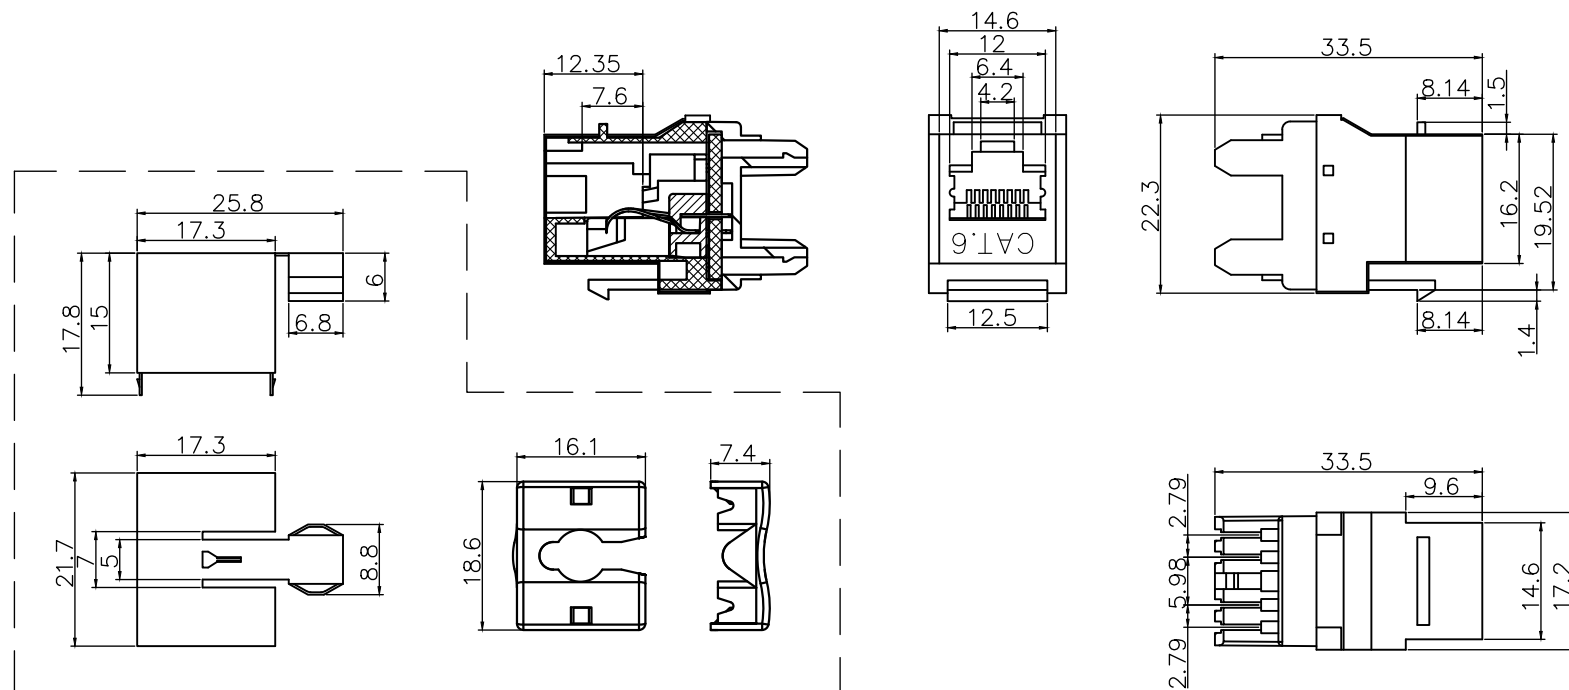


ROHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 100 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PC UL94V-0
2. INSERT MATERIAL : GLASS FILLED POLYESTER UL94V-0 WHITE.
3. PCB MATERIAL : FR-4 THICKNESS 1.6 mm
4. CONTACT MATERIAL : PHOSPHOR BRONZE STAMP PIN $t=0.35$ mm
5. SHIELD MATERIAL : C2680 $T=0.3$ mm, TIN PLATING $120\mu\sim 150\mu$

ENVIRONMENTAL:

1. STORAGE: -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION: 0°C TO 70°C .

CONFORMING TO TIA/EIA 568B.2-1

MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

MARK	0000000	NEW DESIGN	HENRY	050917'
ECN-NO.	REVISION RECORD	DRAWN	DATE	
		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED
		Dimension Range Tolerance	1/1	
		X.X ±0.20 UNIT		APPROVED
		X.XX ±0.15 mm		
		X.XXX ±0.10 SIZE	A3	
Material/Plated/Notes		NAME	SHEET 1/1	
SEE NOTE		CAT.6 KESYtone JACK, FTP		
Tooling No.		PART NO. 326I-00I7-05	REV.	
		DOC. NO.	0	

Design drawing