




REV.	ECH NO.	DATE	SIGN	DESCRIPTION

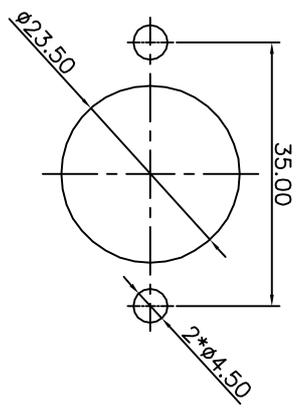



Panel Cut-Out




PCB Layout



Pin Assignments  
Front View 前视图

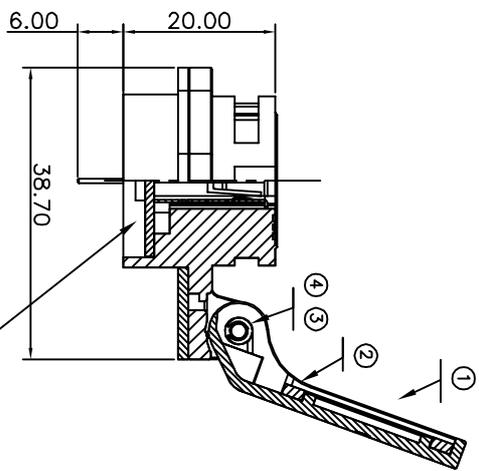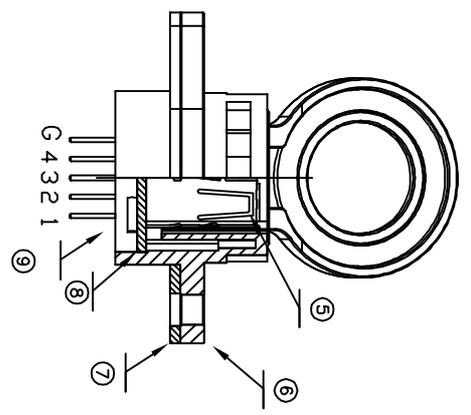

With Liquid Glue

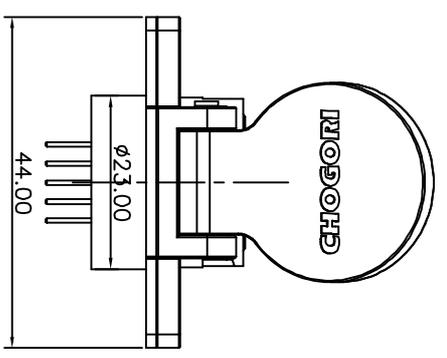

- NOTE:
- ① Important Dimension To Check.
  - ② Contact Resistance:  $\leq 30m\Omega$
  - ③ Breakdown Voltage:  $\geq 500V/1Minute$
  - ④ Insulation Resistance:  $\geq 1000M\Omega$
  - ⑤ Temperature Rating:  $-45^{\circ}C \sim +85^{\circ}C$
  - ⑥ RoHS

NO	NAME	COLOR	SPECIFICATION	QTY	NOTE
9	Terminal Block	Black	Nylon+GF	1	
8	PCB	Green	FR-4;UL 94 V-0	1	
7	Gasket	Black	Silicon Gel		
6	Connector	Black	Nylon+GF	1	
5	Connector		USB-A Female Type		
4	Axle		Stainless Steel	1	
3	Spring		SUS 304	1	
2	Gasket	Black	Silicon Gel	1	
1	Cap	Black	Nylon+GF	10	

UNIT:mm  
TOLERANCE  
 $\pm 0.5$  mm

TITLE  
USB A Type Female Conn.  
PCB Lock Panel (Rhombus)

SCALE: Free  
REV. A  
SIZE: A4  
SHEET 1 OF 1  
①: Inspection Item

**CHOGORI**

ITEM NO: 34000000-05  
DRAWN BY: Xu Xianming  
DATE: 11/18/2011

DWG NO: 34000000-05  
CHECKED BY: Lee  
DATE: 11/18/2011

CUSTOMER NO:  
APPROVED BY: Panson  
DATE: 11/18/2011