

ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
-	DCN 46637	07/17	GPF	

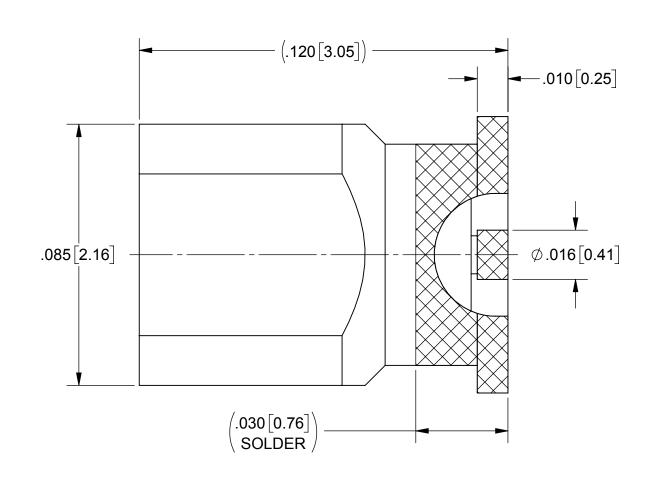

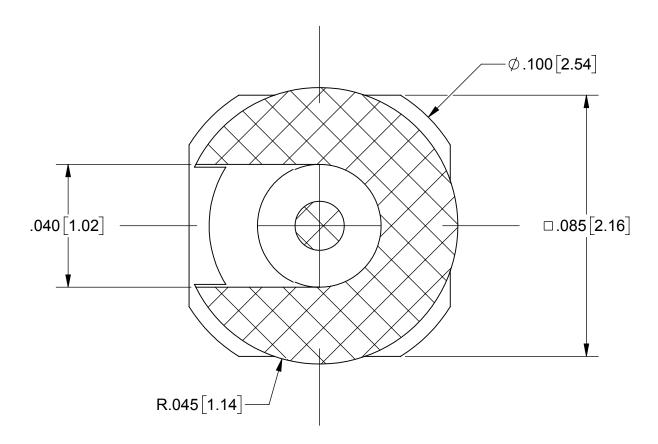

NOTES:

PART NUMBER	INTERFACE	
3811-40022-TD	FULL DETENT	
3811-40023-TD	SMOOTH BORE	

1. FOR RECOMMENDED FOOTPRINT TO YOUR SPECIFIC

3. ALL DIMENSIONS APPLY PRIOR TO SOLDER DIPPING

PCB, CONTACT SV MICROWAVE SALES DEPARTMENT

MATERIAL:

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04 **BODY & CONTACT:**

INSULATOR: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

BODY & CONTACT: GOLD PER ASTM B488, TYPE II,

CODE C, CLASS 0.51, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .000050" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 65.0 GHz

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES
	022110120	FRACTIONAL: +1/64 ANGULAR: X° +1
FINISH:	SEE NOTES	X°X' ±1
SURFACE AREA: N/A		.XX ±.010 .XXX ±.005
001117102711	``` IN/A	INTERPRET PRACTICALS AND TOLERANCE

PROPRIETARY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION	DRAWN:
	CHECKED:
	APPROVED:

UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES .005 R. MAX.
4) CHAM. 13T & LAST THREADS.
5) SURFACE ROUGHNESS 63 MIL-STD-10.
6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
7) REMOVE ALL BURRS

VB 07/14/17 GPF 07/14/17 GPF 07/14/17

(sales@svmicro.com, 561-840-1800)

2. TO BE TIN DIPPED USING Sn96 SOLDER



TITLE: **SMPS MALE SURFACE MOUNT**

B 95077 3811-40022-40023-TD SCALE: 32:1