

**Style**

M8 Socket, shielded  
3 pin  
A-coding

**Ratings**

Voltage: 60 V  
Current: 3 A

**Operating Temperature Range**

-40~105 °C

**Materials**

- ① Insulator: PA66, UL94 HB, black
- ② Pin: C3604 brass, gold flashing
- ③ Nut: C3604 brass, nickel plated
- ④ Shell: C3604 brass, nickel plated
- ⑤ O-ring: Silicone rubber

**Electrical Requirements**

Dielectric strength: 1 min @ 500 Vac  
Insulation resistance: 100 MΩ @ 500 Vdc  
Contact resistance: 10 mΩ or less

**Mechanical Requirements**


Life cycle: 1000 mating cycles minimum

**Environmental Requirements**






Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 24 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 mΩ.  
Waterproof: IP67

**Assembly Info**

Wire gauge: 24 AWG max



Front View  
Not to Scale

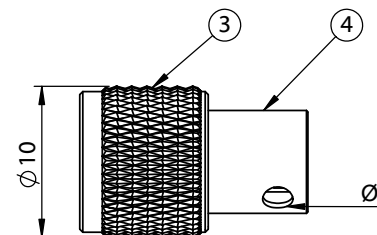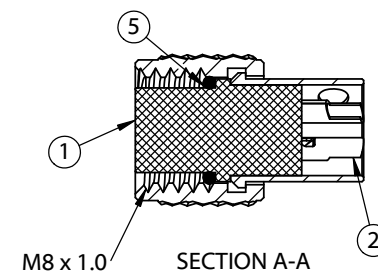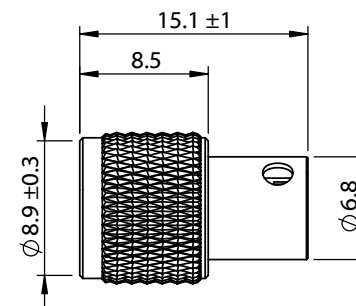

Revision:	Date:	Description:	Prepared:	Notes:	<div style="text-align: center;"> <h1>TENSILITY</h1> <p> tel 1.541.323.3228 800 877.670.7118  fax 1.541.323.4202 web tensility.com </p> </div>		
A	8/20/21	Initial Release	Verified:	RoHS compliant			
			Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	Size:	Part number:	
				Description:	A	50-00681	
				Connector, M8 A-code socket 3 pin, 8x15.1 mm, molding style, solder cup, gold plated, IP67, shielded	Scale: 2:1		Sheet 1 of 1