

Style
M8 Plug, shielded
4 pin
A-coding

Ratings
Voltage: 30 V
Current: 3 A







Operating Temperature Range
-40~105 °C

Materials
① Insulator: PA66, UL 94 HB, black
② Pin: C3604 brass, gold flashing
③ Nut: C3604 brass, nickel plated
④ Shell: C3604 brass, nickel plated
⑤ O-ring: Silicone rubber
⑥ Epoxy: Epoxy resin



Electrical Requirements
Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 10 mΩ or less

Mechanical Requirements
Life cycle: 1000 mating cycles minimum

Environmental Requirements
Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 24 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 mΩ.
Waterproof: IP67 (in mated state). IP67 panel ingress requires sealing cap

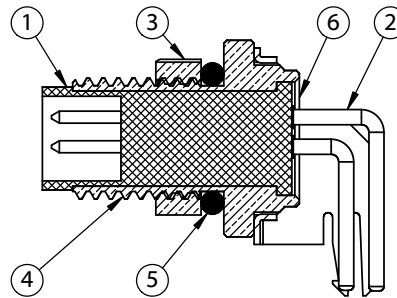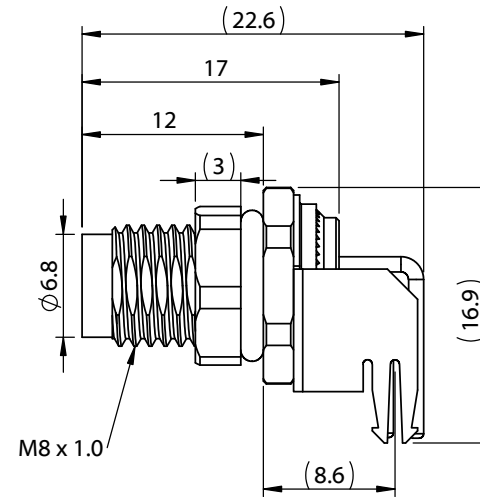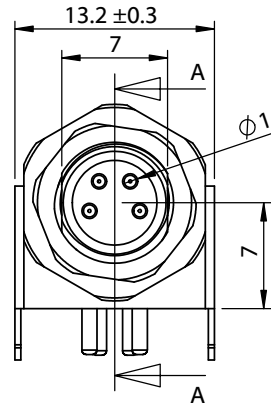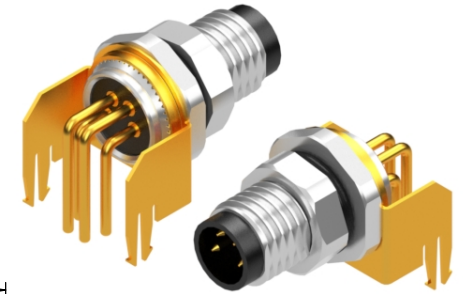

SECTION A-A

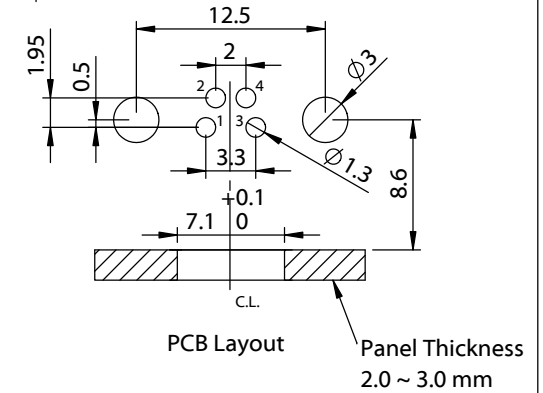

Revision:	Date:	Description:	Prepared:	Notes:	<div style="text-align: center;"> <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> </div>
A	8/23/21	Initial Release	Verified:	RoHS compliant	
				Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Description: Connector, M8 A-code plug, 4 pin, 8xL22.6 mm, panel mount, thru hole, 90°, board lock, gold plated, IP67	
			Size: A		Part number: 54-00272
			Scale: 2:1		Sheet 1 of 1