
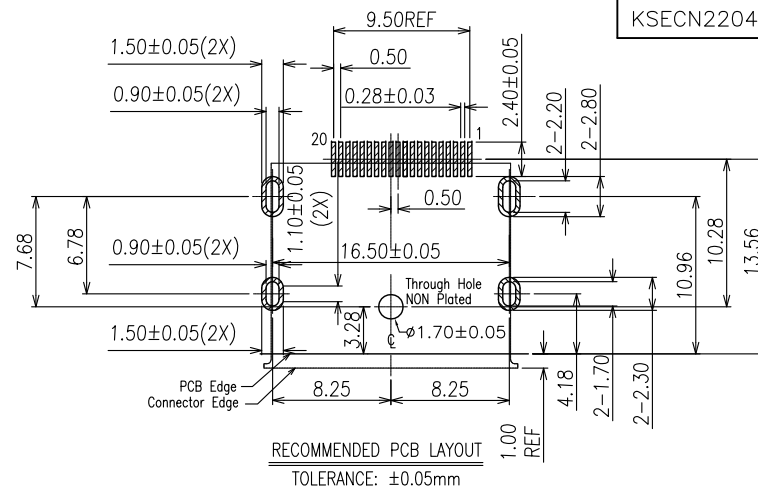




符合"DLK环境管理物质技术标准"

符合VESA协会规范标准"



工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
KSECN18016	A	20180321	NEW RELEASE	—	—
KSECN22018	B	20220802	产品外壳材质由C2680改为SUS430 $\triangle$ *2	覃智森	吴豪
KSECN22048	C	20221121	修改弹片高度 $\triangle$ *1	邱宇	吴豪

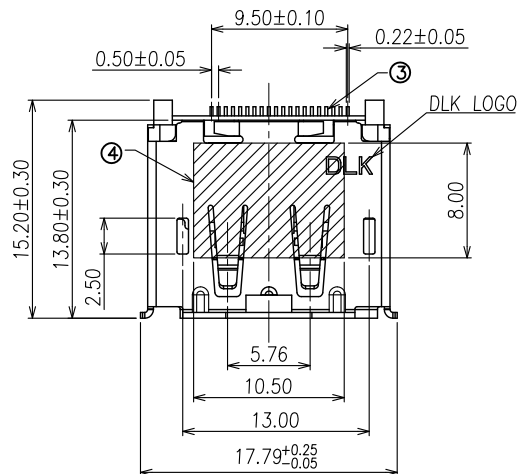

NOTE:
1. MATERIAL:
1.1 Housing: LCP UL94v-0, color: Black
1.2 Contact: Copper alloy
1.3 Shell: Stainless steel
2. PLATING:
2.1 Contact: 15u"Au plated on contact Area, 50u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated
2.2 Shell: Nickel plated overall
3. MECHANICAL:
3.1 Mating force:4.5kgf Max.
3.2 Unmating force:1.0~4.0kgf.
3.3 Durability:10000 cycles Min.
4. ELECTRICAL:
4.1 Current Rating:0.5A
4.2 Voltage Rating:40V
4.3 Dielectric strength:500V AC FOR 1 minute
4.4 Insulation Resistance:100MΩ Min.
4.5 Contact Resistance:30mΩ Max
5. Operating Temperature:-55°c to +85°c
6. PACKING: Tray

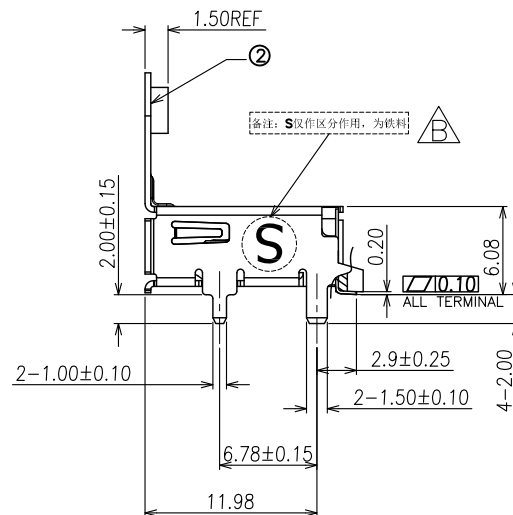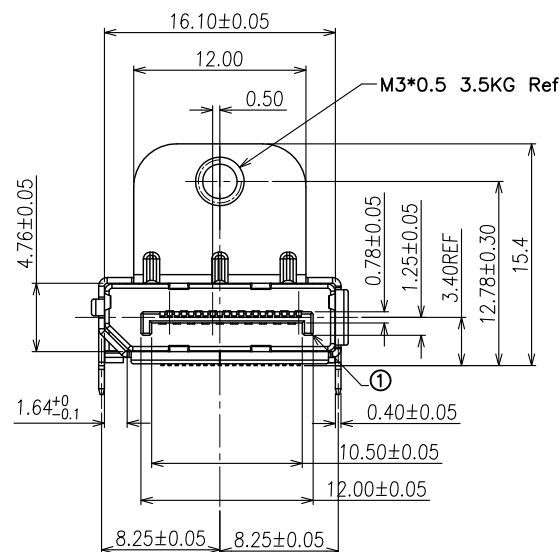

HF无卤字样

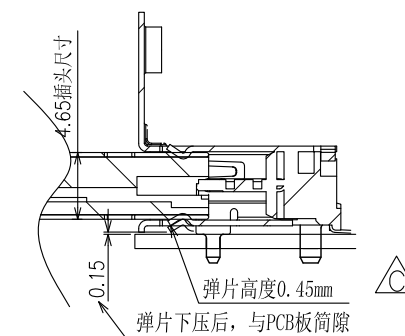

4	MYLAR	1	MYLAR	—
3	CONTACT	20	COPPER ALLOY	PLATED Au
2	SHELL	1	STAINLESS STEEL	PLATED NI
1	HOUSING	1	LCP	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE UNLESS OTHERWISE NOTED	
Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	

德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD	
C 名称 TITLE:	DisplayPort SMT Type 12.78H
档案名称 FILE NAME:	C-DPT22-00-00
料号 PART NO:	62220B04101
DRAWING	王永辉
CHECKED	—
APPROVED	严成旺
UNIT:	mm
SCALE	1:1
SHEET:	1 of 1