
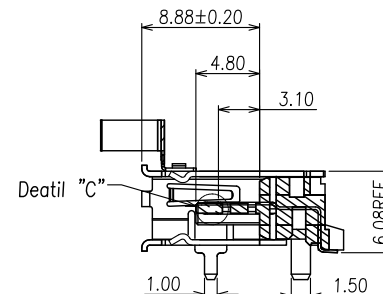


符合"DLK环境管理物质技术标准"




符合VESA协会规范标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
KSECN22002	B	20220228	增加载带包装, 增加DPT23A-20BM4RN10料号△*1	蒋召	吴豪
KSECN22018	C	20220802	产品外壳材质由C2680改为SUS430 △*2	覃智森	吴豪
KSECN22048	D	20221121	修改弹片高度 △*1	邱宇	吴豪

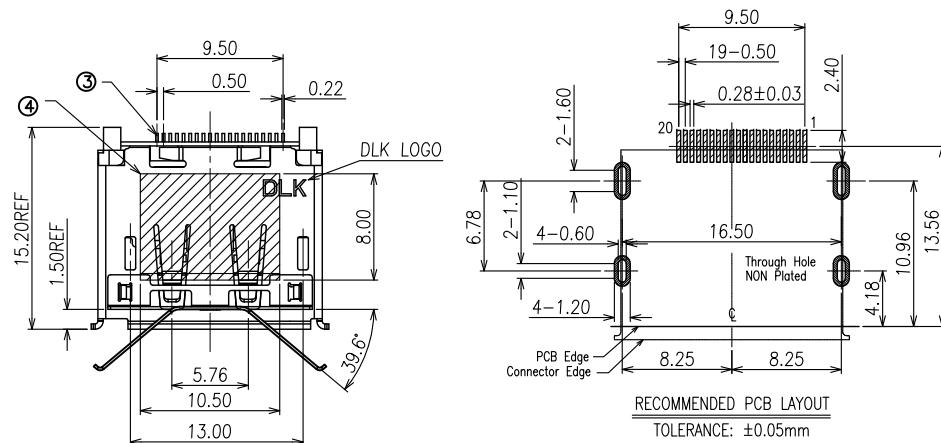

SECTION: B-B

SCALE 4:1

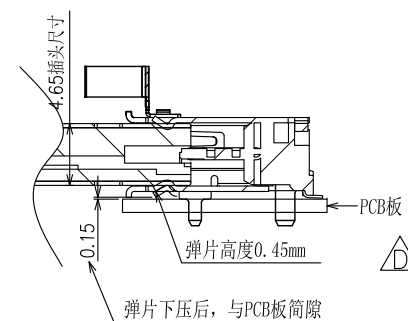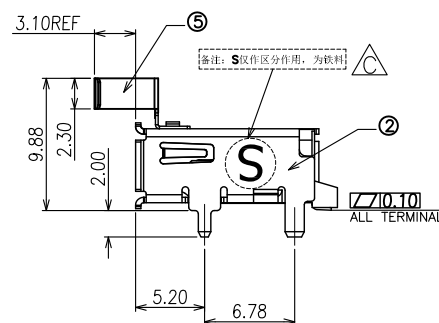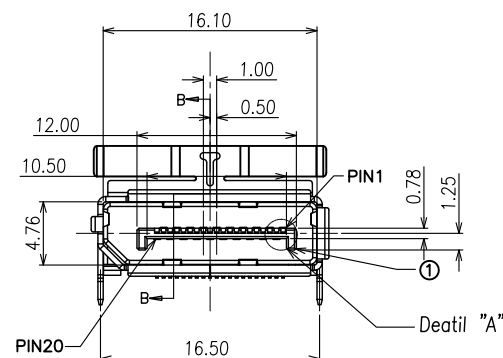

NOTE:

1. MATERIAL.

1.1 Housing: LCP UL94v-0, color: Black

1.2 Contact: Copper alloy

1.3 Shell: Stainless steel

1.4 Shrapnel: Stainless steel

2. PLATING:

2.1 Contact: 1u"Au plated on contact Area,
50u" Min. Matte Tin plated on solder tail,
50u" Min. Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Mating force: 4.5kgf Max.

3.2 Unmating force: 1.0~4.0kgf.

3.3 Durability: 10000 cycles Min.

4. ELECTRICAL:

4.1 Current Rating: 0.5A

4.2 Voltage Rating: 40V

4.3 Dielectric strength: 500V AC FOR 1 minute

4.4 Insulation Resistance: 100MΩ Min.

4.5 Contact Resistance: 30mΩ Max

5. Operating Temperature: -55°C to +85°C

6. PACKING: Tape & Reel

5	SHRAPNEL	1	STAINLESS STEEL	——
4	MYLAR	1	MYLAR	——
3	CONTACT	20	COPPER ALLOY	PLATED Au
2	SHELL	1	STAINLESS STEEL	PLATED NI
1	HOUSING	1	LCP	UL94V-0, Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle ±5°

X. ±0.35

.X ±0.25

.XX ±0.15

.XXX ±0.10

A4



德力康电子科技有限公司



DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE:	DisplayPort SMT Type 9.88H			
	档案名称 FILE NAME:	C-DPT23-00-00	料号 PART NO:	62320B04101	
DRAWING	王永辉	CHECKED	——	APPROVED	严成旺
UNIT:	mm	SCALE	1:1	SHEET:	1 of 1