
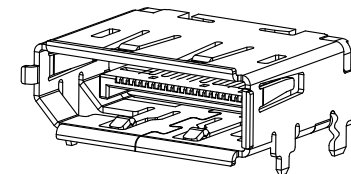


符合"DLK环境管理物质技术标准"

符合VESA协会规范标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
KSECN21070	A	20211231	NEW RELEASE	—	—
KSECN22048	B	20221121	修改弹片高度 Δ *1	邱 宇	吴 豪

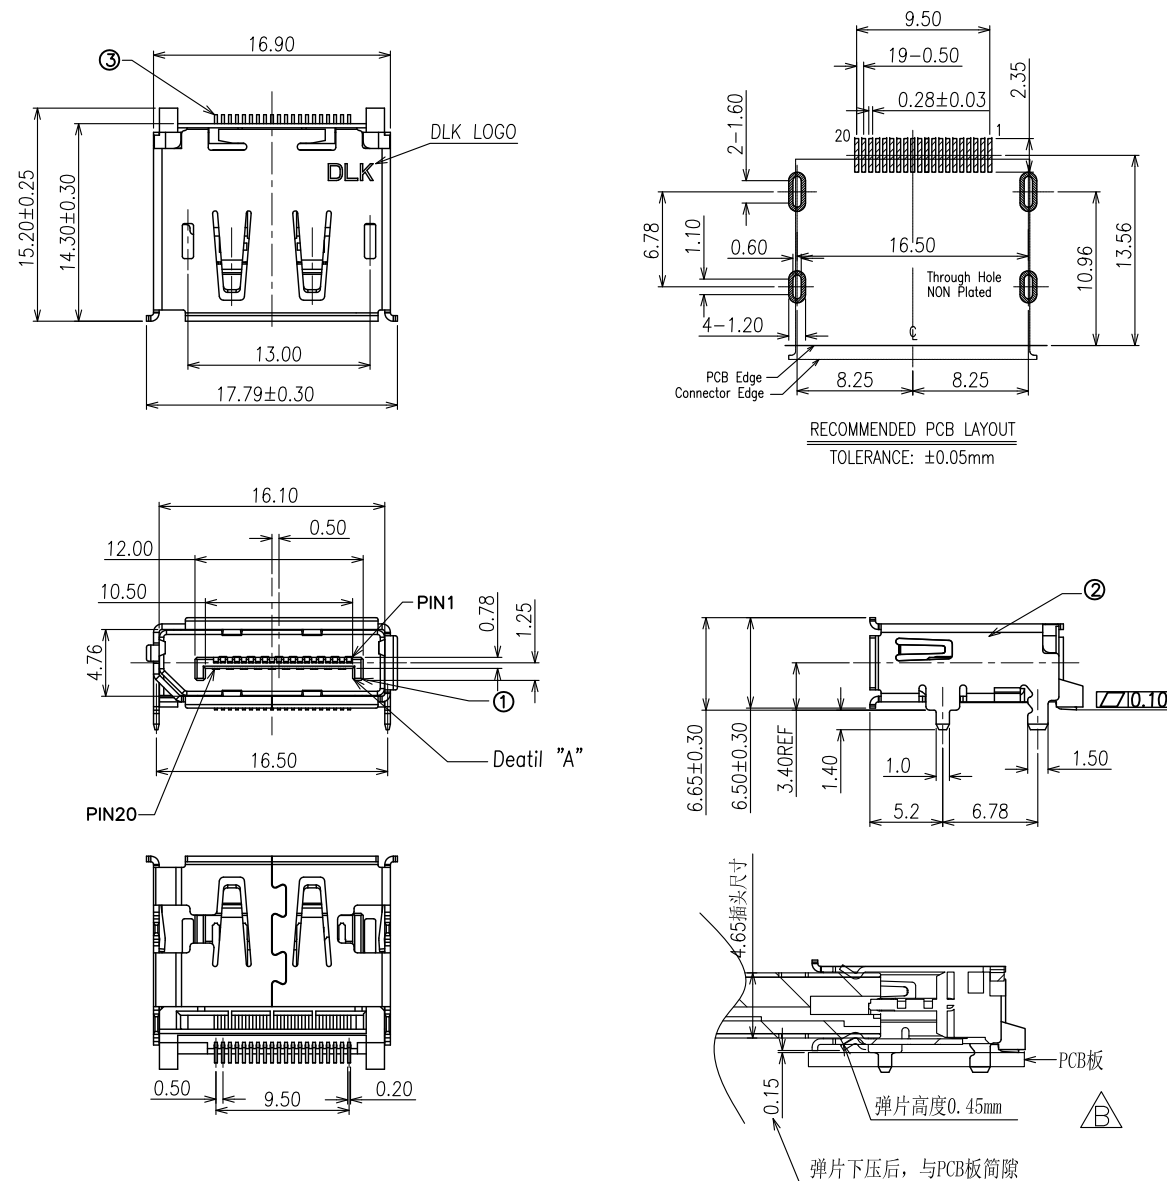

- NOTE:
- MATERIAL:
 - Housing: LCP UL94v-0, color: Black
 - Contact: Copper alloy
 - Shell: Copper alloy
 - PLATING:
 - Contact: 1u"Au plated on contact Area, 50u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated
 - Shell: Nickel plated overall
 - MECHANICAL:
 - Mating force:4.5kgf Max.
 - Unmating force:1.0~4.0kgf.
 - Durability:10000 cycles Min.
 - ELECTRICAL:
 - Current Rating:0.5A
 - Voltage Rating:40V
 - Dielectric strength:500V AC FOR 1 minute
 - Insulation Resistance:100MΩ Min.
 - Contact Resistance:30mΩ Max
 - Operating Temperature:-55°c to +85°c
 - PACKING: Tape & Reel

3	CONTACT	20	COPPER ALLOY	PLATED Au
2	SHELL	1	COPPER ALLOY	PLATED NI
1	HOUSING	1	LCP	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE UNLESS OTHERWISE NOTED	
Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	



德力康电子科技有限公司



DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE:	DisplayPort SMT Type 6.08H DIP脚长1.4			
	档案名称 FILE NAME:	C-DPT24-00-04	料号 PART NO:	62420B01141	
	DRAWING	覃智森	CHECKED	APPROVED	吴豪
	UNIT:	mm	SCALE	1:1	SHEET: 1 of 1