
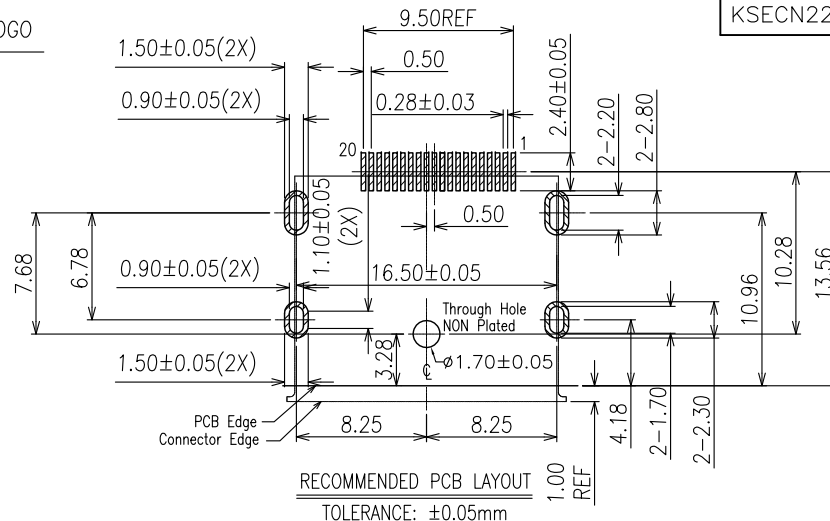






符合"DLK环境管理物质技术标准"

符合VESA协会规范标准"

| 工程变更通知单<br>ECN(DCN) NO. | 版本<br>REV | 日期<br>DATE | 说明<br>DESCRIPTION     | 变更<br>CHANGE | 核准<br>APPRO. |
|-------------------------|-----------|------------|-----------------------|--------------|--------------|
| KSECN21009              | A         | 20210121   | NEW RELEASE           | —            | —            |
| KSECN21032              | B         | 20210616   | 后塞加把手 $\triangle$ *1  | 蒋召           | 覃智森          |
| KSECN22048              | C         | 20221121   | 修改弹片高度 $\triangle$ *1 | 邱宇           | 吴豪           |

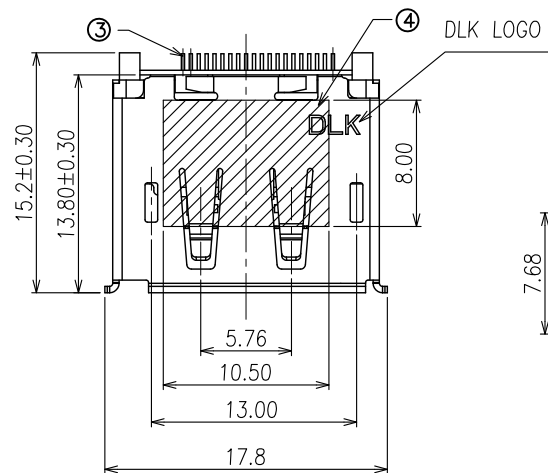

NOTE:  
1. MATERIAL:  
1.1 Housing: LCP UL94v-0, color: Black  
1.2 Contact: Copper alloy  
1.3 Shell: Copper alloy  
2. PLATING:  
2.1 Contact: 1u"Au plated on contact Area,  
50u" Min. Matte Tin plated on solder tail,  
50u" Min.Nickel underplated  
2.2 Shell: Nickel plated overall  
3. MECHANICAL:  
3.1 Mating force:4.5kgf Max.  
3.2 Unmating force:1.0~4.0kgf.  
3.3 Durability:10000 cycles Min.  
4. ELECTRICAL:  
4.1 Current Rating:0.5A  
4.2 Voltage Rating:40V  
4.3 Dielectric strength:500V AC FOR 1 minute  
4.4 Insulation Resistance:100M $\Omega$  Min.  
4.5 Contact Resistance:30m $\Omega$  Max  
5. Operating Temperature:-55°c to +85°c  
6. PACKING: Tape & Reel

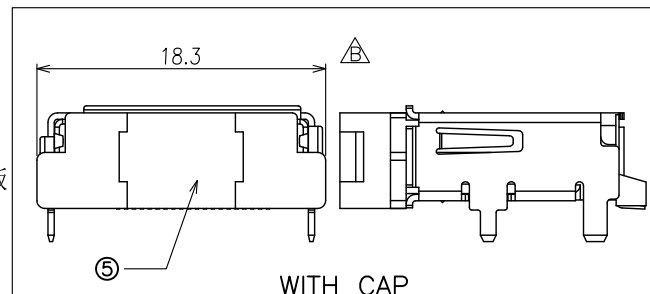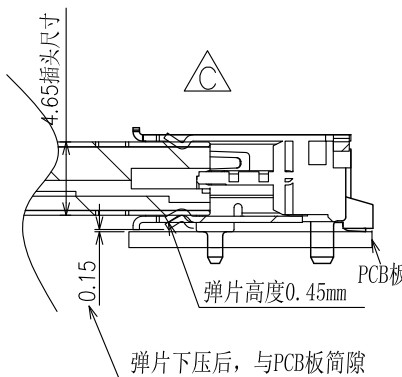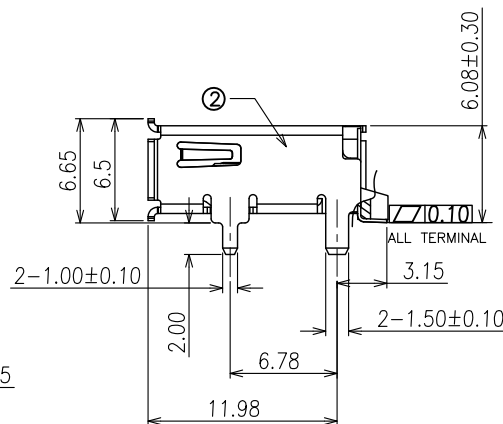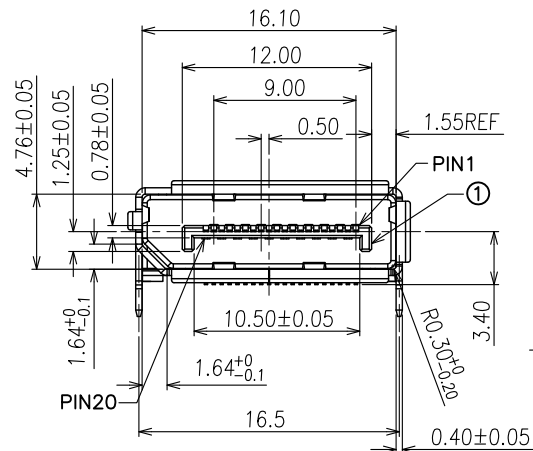

|     |         |      |              |               |
|-----|---------|------|--------------|---------------|
| 5   | CAP     | 1    | LCP          | UL94V-0,Black |
| 4   | MYLAR   | 1    | MYLAR        | —             |
| 3   | CONTACT | 20   | COPPER ALLOY | PLATED Au     |
| 2   | SHELL   | 1    | COPPER ALLOY | PLATED NI     |
| 1   | HOUSING | 1    | LCP          | UL94V-0,Black |
| NO. | ITEM    | Q'TY | DESCRIPTION  | FINISH        |

| GENERAL TOLERANCE<br>UNLESS OTHERWISE NOTED |               |
|---------------------------------------------|---------------|
| Angle                                       | $\pm 5^\circ$ |
| .X                                          | $\pm 0.35$    |
| .X                                          | $\pm 0.25$    |
| .XX                                         | $\pm 0.15$    |
| .XXX                                        | $\pm 0.10$    |

|                                                            |                                     |
|------------------------------------------------------------|-------------------------------------|
| 德力康电子科技有限公司<br>DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD |                                     |
| C 名称<br>TITLE:                                             | DisplayPort SMT Type 6.08H WITH CAP |
| 档案名称<br>FILE NAME:                                         | C-DPT24-00-09                       |
| 料号<br>PART NO:                                             | 62420B01191                         |
| DRAWING                                                    | 蒋召                                  |
| CHECKED                                                    | —                                   |
| APPROVED                                                   | 覃智森                                 |
| UNIT:                                                      | mm                                  |
| SCALE                                                      | 1:1                                 |
| SHEET:                                                     | 1 of 1                              |