




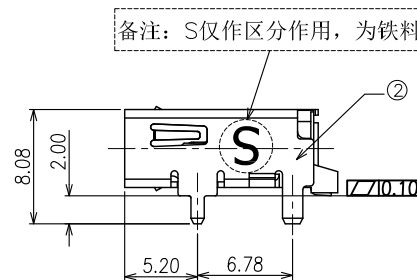
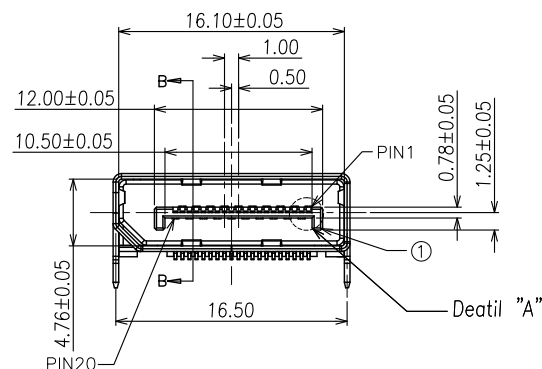
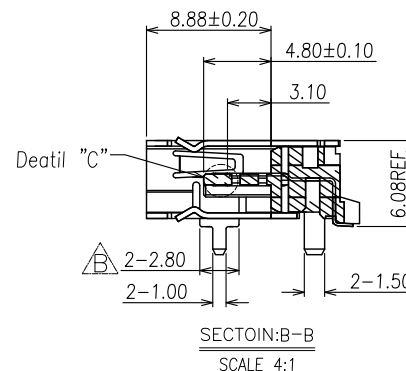
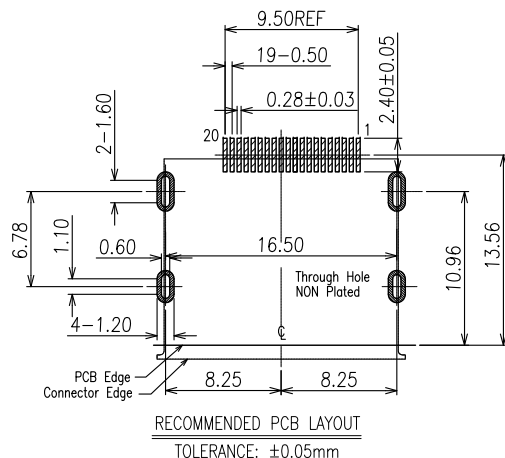


符合"DLK环境管理物质技术标准"

符合VESA协会规范标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
KSECN23009	A	20230322	NEW RELEASE	—	—
KSECN23023	B	20230815	依客户要求将外充前脚上段宽度尺寸 由2.4mm改为2.8mm	覃智森	段国强

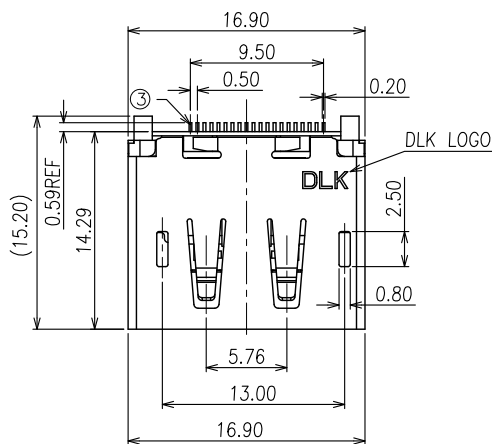

- NOTE:
- MATERIAL:
 - Housing: LCP UL94v-0, color: Black
 - Contact: Copper alloy
 - Shell: Stainless steel
 - PLATING:
 - Contact: 1u"Au plated on contact Area, 50u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated
 - Shell: Nickel plated overall
 - MECHANICAL:
 - Mating force:4.5kgf Max.
 - Unmating force:1.0~4.0kgf.
 - Durability:10000 cycles Min.
 - ELECTRICAL:
 - Current Rating:0.5A
 - Voltage Rating:40V
 - Dielectric strength:500V AC FOR 1 minute
 - Insulation Resistance:100MΩ Min.
 - Contact Resistance:30mΩ Max
 - Operating Temperature:-55*c to +85*c
 - PACKING: Tape & Reel

3	CONTACT	20	COPPER ALLOY	PLATED Au
2	SHELL	1	STAINLESS STEEL	PLATED NI
1	HOUSING	1	LCP	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10

A4



德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE:	DisplayPort SMT Type 6.08H DIP脚长2.0			
	档案名称 FILE NAME.	C-DPT29-00-06	料号 PART NO:	62920B01161	
DRAWING	邱宇	CHECKED	—	APPROVED	覃智森
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1	