
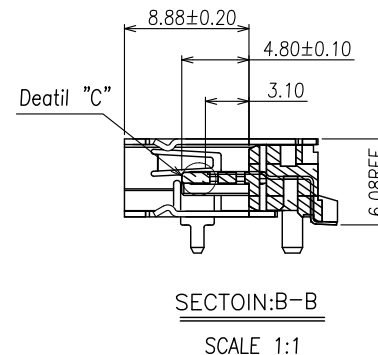
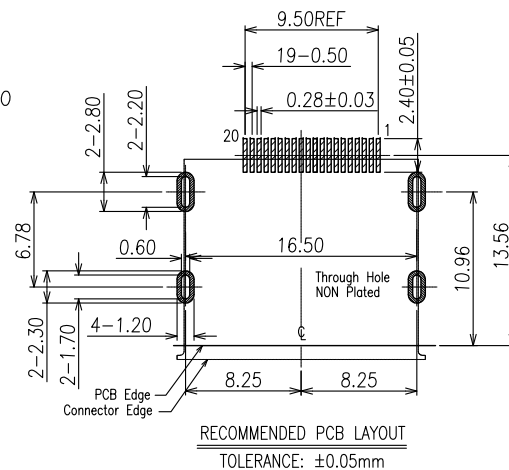





符合"DLK环境管理物质技术标准"

符合VESA协会规范标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
KSECN20048	A	20201102	NEW RELEASE	—	—
KSECN22048	B	20221121	修改弹片高度 Δ *1	邱 宇	吴 豪

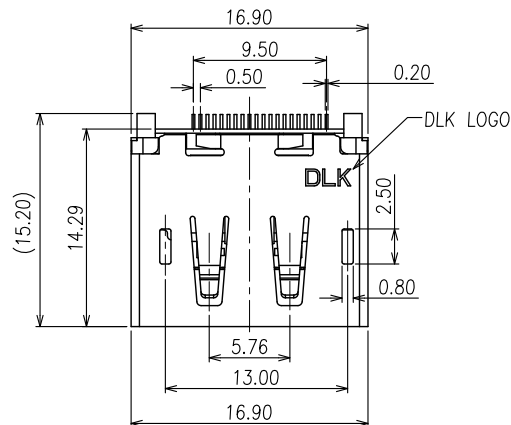

- NOTE:
- MATERIAL:
 - Housing: LCP UL94v-0, color: Black
 - Contact: Copper alloy
 - Shell: Copper alloy
 - PLATING:
 - Contact: 15u"Au plated on contact Area, 50u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated
 - Shell: Nickel plated overall
 - MECHANICAL:
 - Mating force:4.5kgf Max.
 - Unmating force:1.0~4.0kgf.
 - Durability:10000 cycles Min.
 - ELECTRICAL:
 - Current Rating:0.5A
 - Voltage Rating:40V
 - Dielectric strength:500V AC FOR 1 minute
 - Insulation Resistance:100M Ω Min.
 - Contact Resistance:30m Ω Max
 - Operating Temperature:-55°c to +85°c
 - PACKING: Tape & Reel

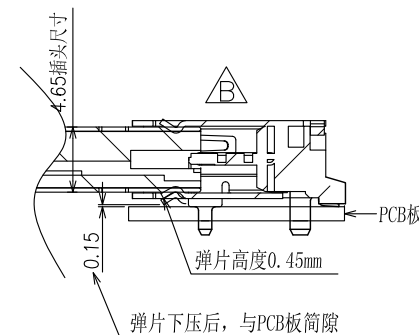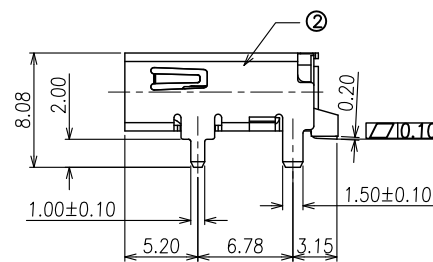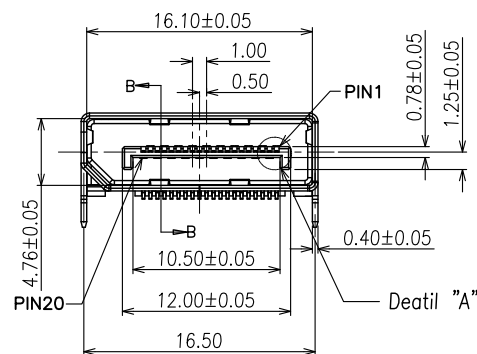

3	CONTACT	20	COPPER ALLOY	PLATED Au
2	SHELL	1	COPPER ALLOY	PLATED NI
1	HOUSING	1	LCP	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle $\pm 5^\circ$

X. ± 0.35

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

A4 ϕ $\frac{1}{2}$



德力康电子科技有限公司



DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称 TITLE:	DisplayPort SMT Type 6.08H DIP脚长2.0			
档案名称 FILE NAME.	C-DPT29-00-01	料号 PART NO.	62920B04111	
DRAWING	蒋 召	CHECKED	—	APPROVED 覃智森
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1