


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

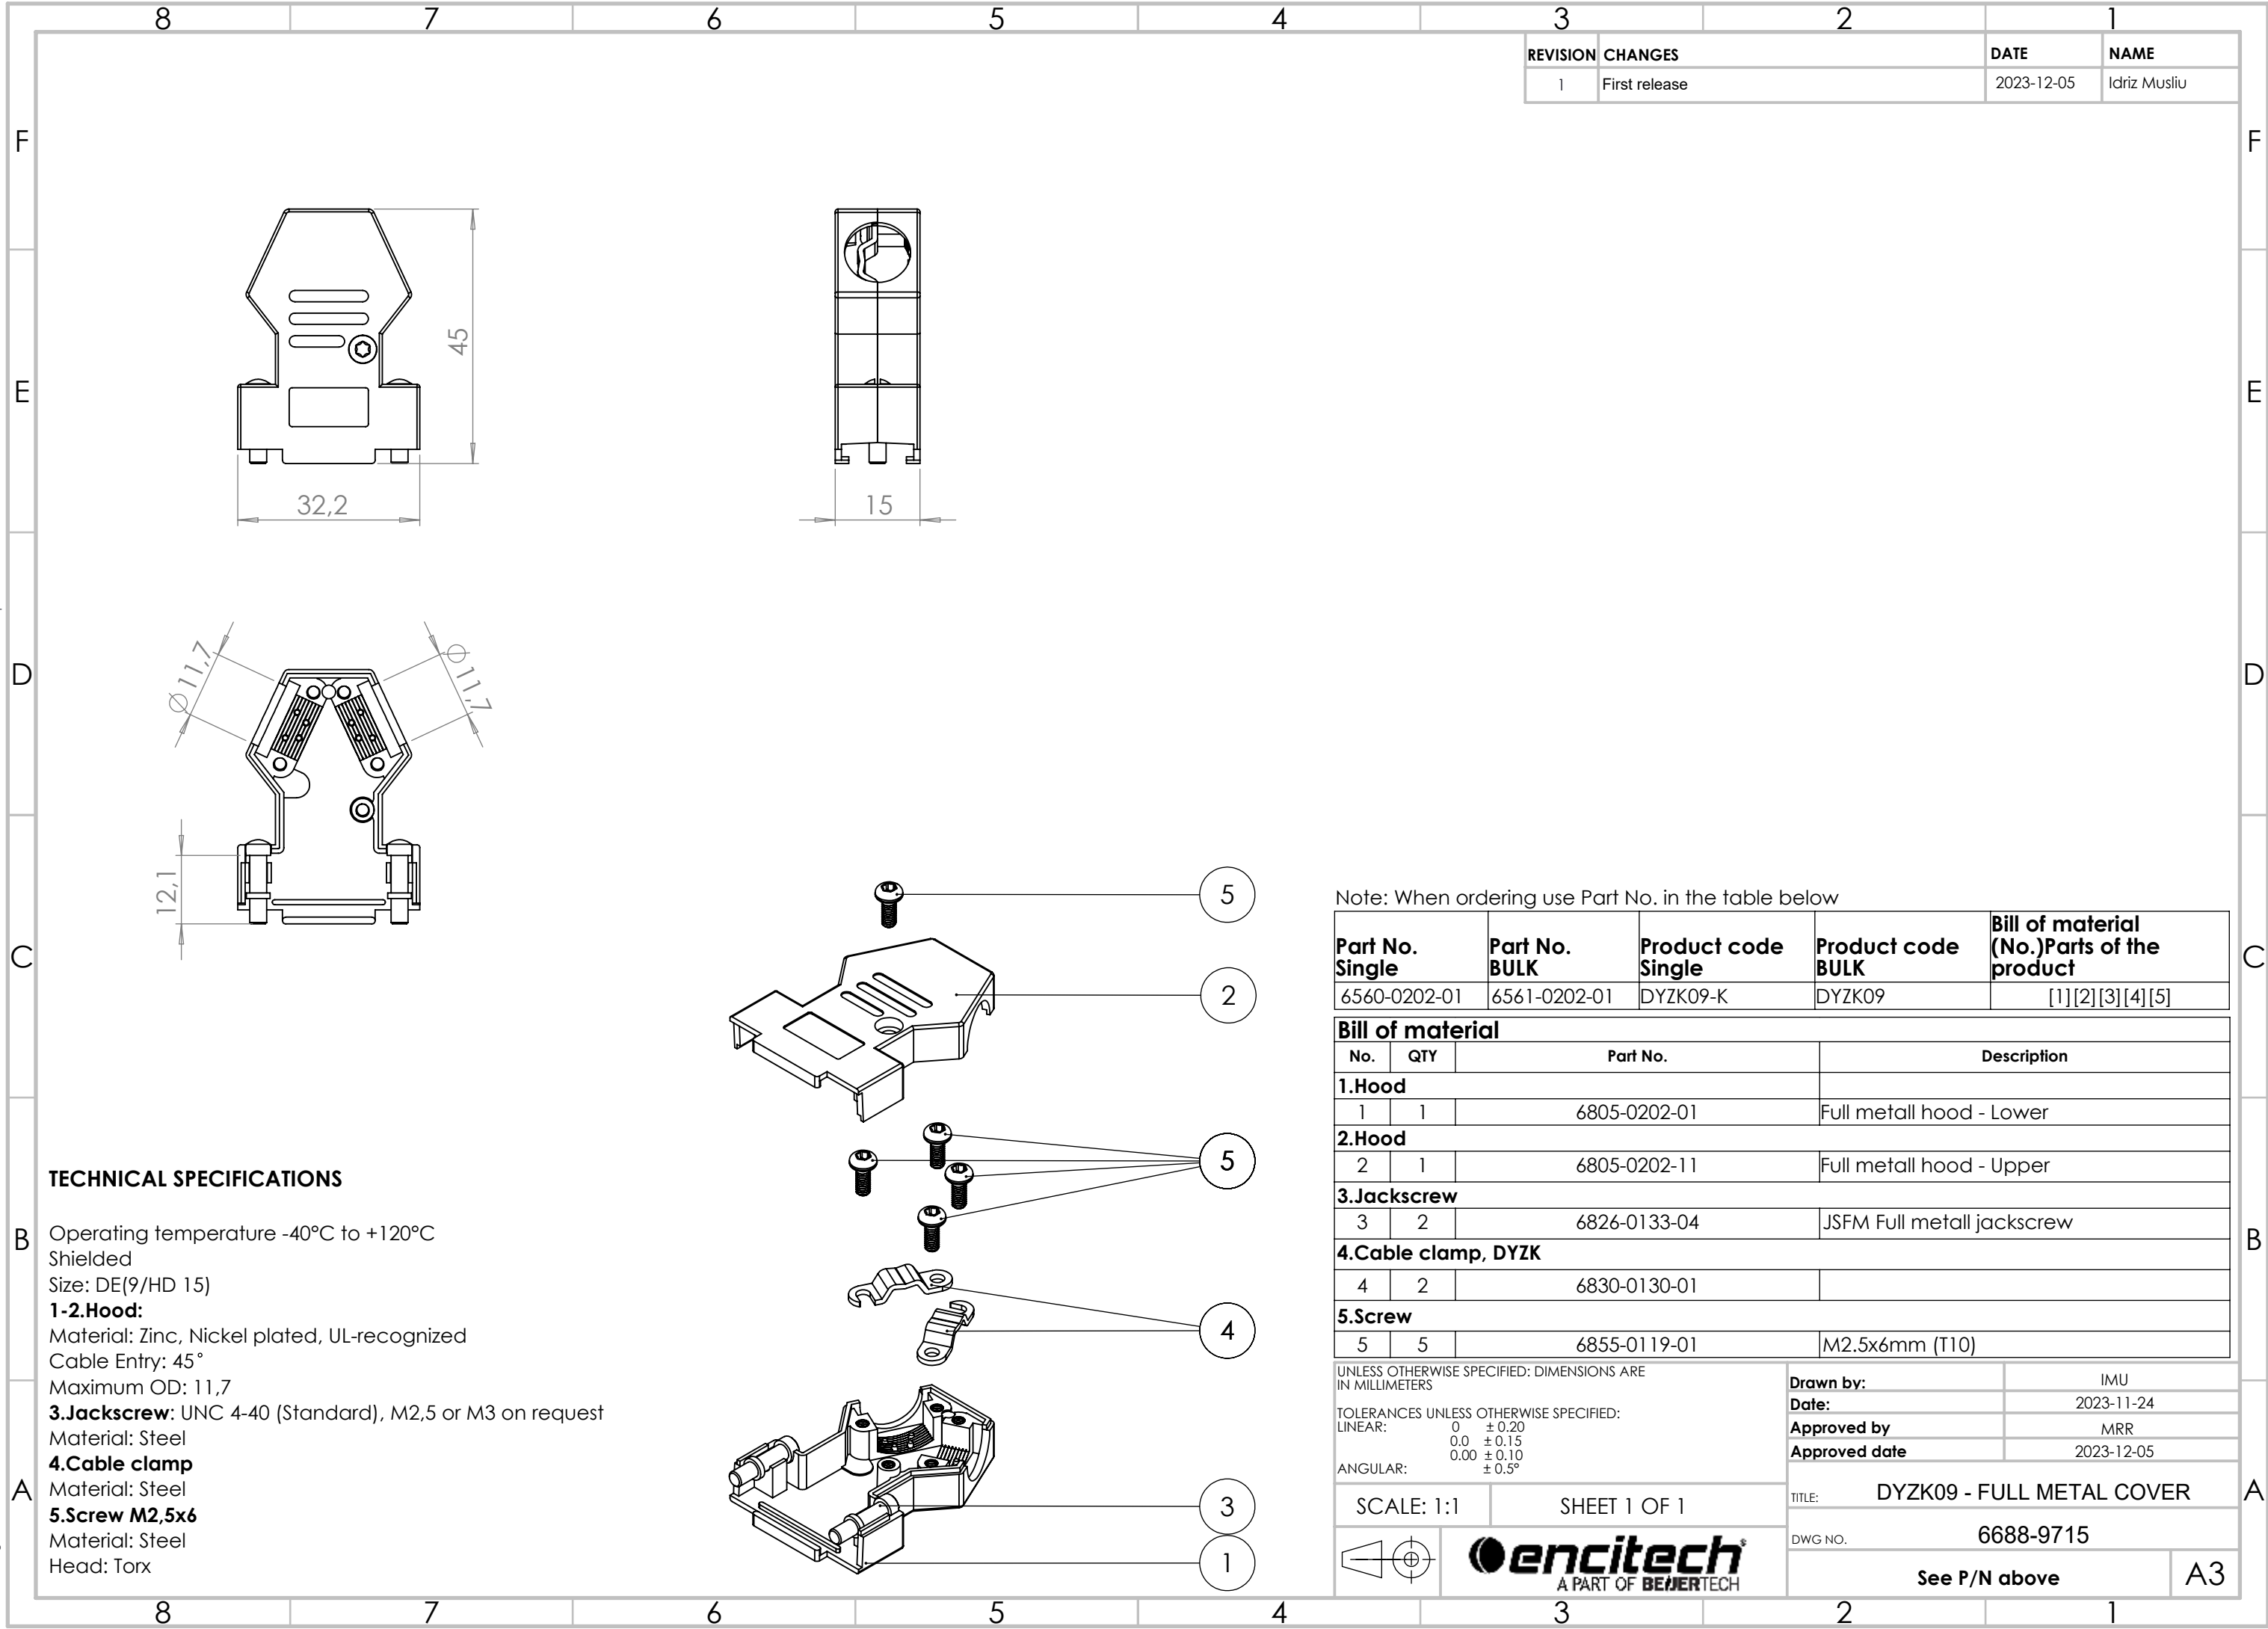

TECHNICAL SPECIFICATIONS

- Operating temperature -40°C to +120°C
Shielded
Size: DE(9/HD 15)
1-2.Hood:
Material: Zinc, Nickel plated, UL-recognized
Cable Entry: 45°
Maximum OD: 11,7
3.Jackscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel
4.Cable clamp
Material: Steel
5.Screw M2,5x6
Material: Steel
Head: Torx

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-0202-01	6561-0202-01	DYZK09-K	DYZK09	[1][2][3][4][5]

Bill of material				
No.	QTY	Part No.		Description
1.Hood				
1	1	6805-0202-01		Full metall hood - Lower
2.Hood				
2	1	6805-0202-11		Full metall hood - Upper
3.Jackscrew				
3	2	6826-0133-04		JSFM Full metall jackscrew
4.Cable clamp, DYZK				
4	2	6830-0130-01		
5.Screw				
5	5	6855-0119-01		M2.5x6mm (T10)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS


TOLERANCES UNLESS OTHERWISE SPECIFIED:

LINEAR:
0 ± 0.20
0.0 ± 0.15
0.00 ± 0.10
± 0.5°

ANGULAR:

SCALE: 1:1

SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2023-11-24
Approved by	MRR
Approved date	2023-12-05
TITLE: DYZK09 - FULL METAL COVER	
DWG NO. 6688-9715	
See P/N above	

A3