


This drawing must not without our permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

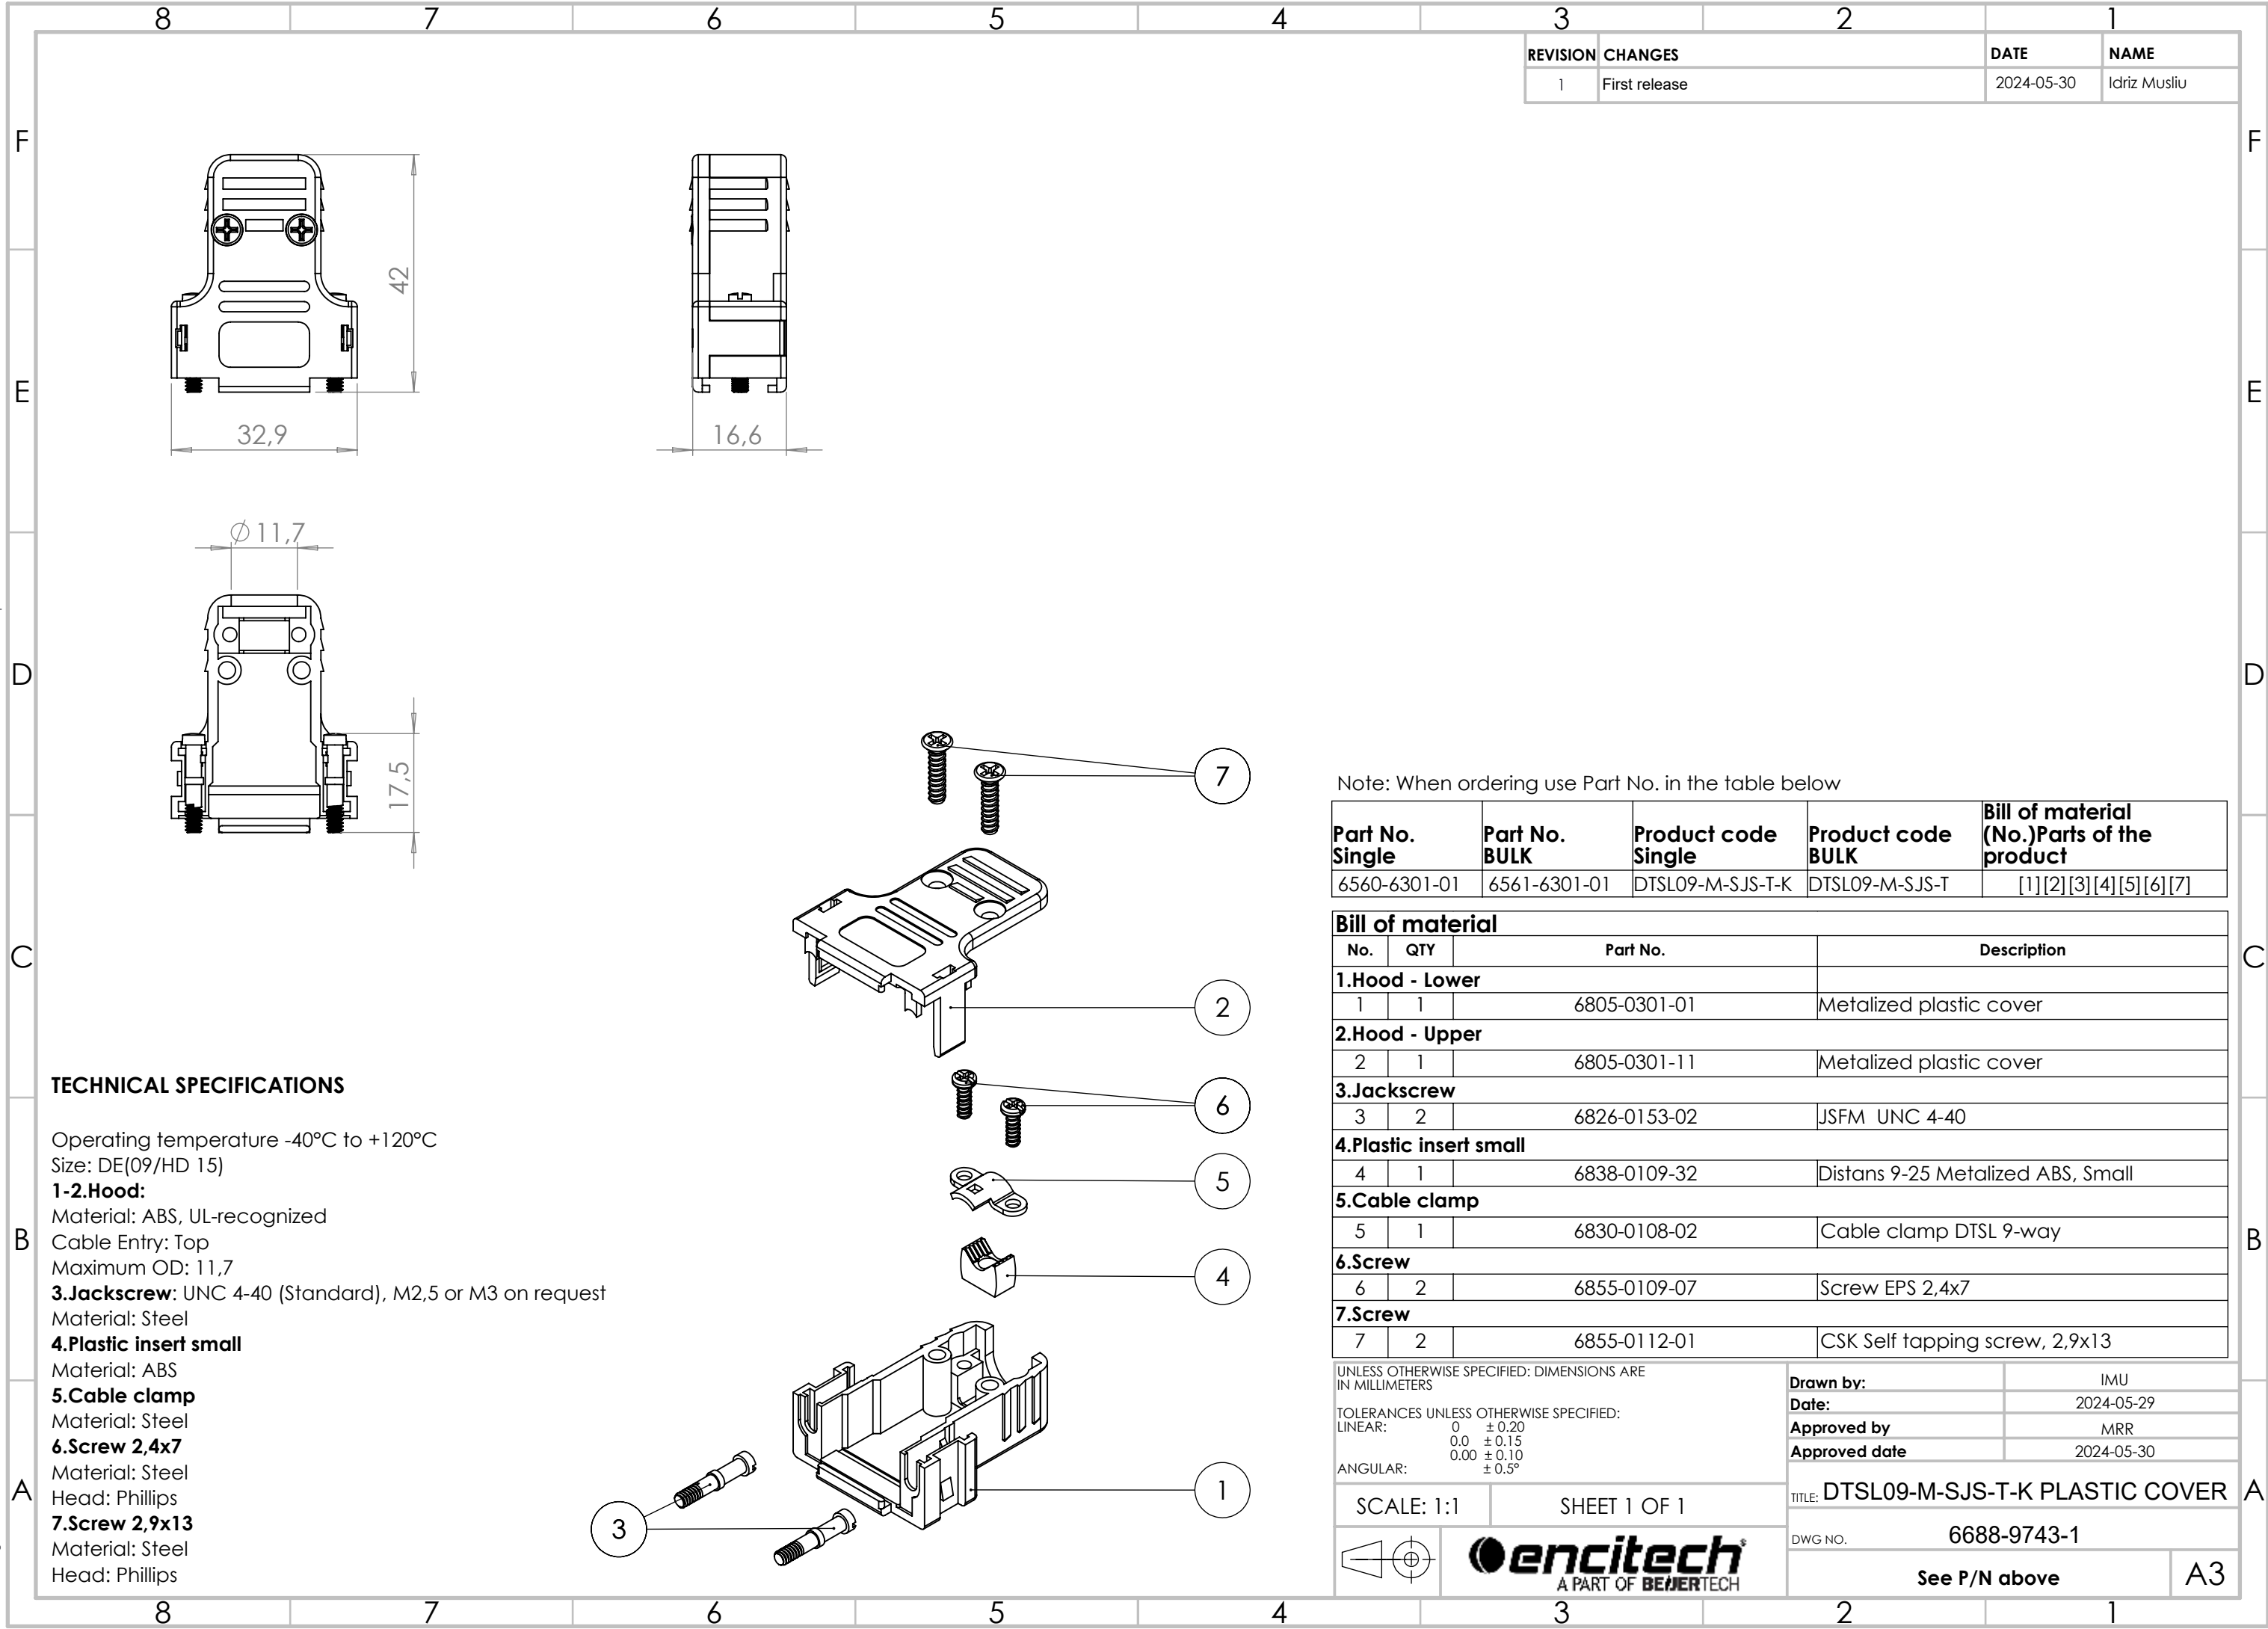

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DE(09/HD 15)

1-2.Hood:

Material: ABS, UL-recognized
Cable Entry: Top
Maximum OD: 11,7

3.Jackscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel

4.Plastic insert small

Material: ABS

5.Cable clamp

Material: Steel

6.Screw 2,4x7

Material: Steel
Head: Phillips

7.Screw 2,9x13

Material: Steel
Head: Phillips

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-6301-01	6561-6301-01	DTSL09-M-SJS-T-K	DTSL09-M-SJS-T	[1][2][3][4][5][6][7]

Bill of material				
No.	QTY	Part No.		Description
1.Hood - Lower				Metalized plastic cover
1	1	6805-0301-01		
2.Hood - Upper				Metalized plastic cover
2	1	6805-0301-11		
3.Jackscrew				JSFM UNC 4-40
3	2	6826-0153-02		
4.Plastic insert small				Distans 9-25 Metalized ABS, Small
4	1	6838-0109-32		
5.Cable clamp				Cable clamp DTSL 9-way
5	1	6830-0108-02		
6.Screw				Screw EPS 2,4x7
6	2	6855-0109-07		
7.Screw				CSK Self tapping screw, 2,9x13
7	2	6855-0112-01		


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

LINEAR: 0 ± 0.20
0.0 ± 0.15
0.00 ± 0.10
ANGULAR: ± 0.5°

SCALE: 1:1

SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2024-05-29
Approved by	MRR
Approved date	2024-05-30

TITLE: DTSL09-M-SJS-T-K PLASTIC COVER

DWG NO. 6688-9743-1

See P/N above

A3