


This drawing must not without our, permission be copied, im-
parted to a third party or otherwise used without authorisa-
tion. Contravention will be prosecuted.

Denna ritning är vår egendom och skyddas enligt gällande lag
samt får ej utan vårt medgivande kopieras, delgivas annan eller
obehörigen användas.

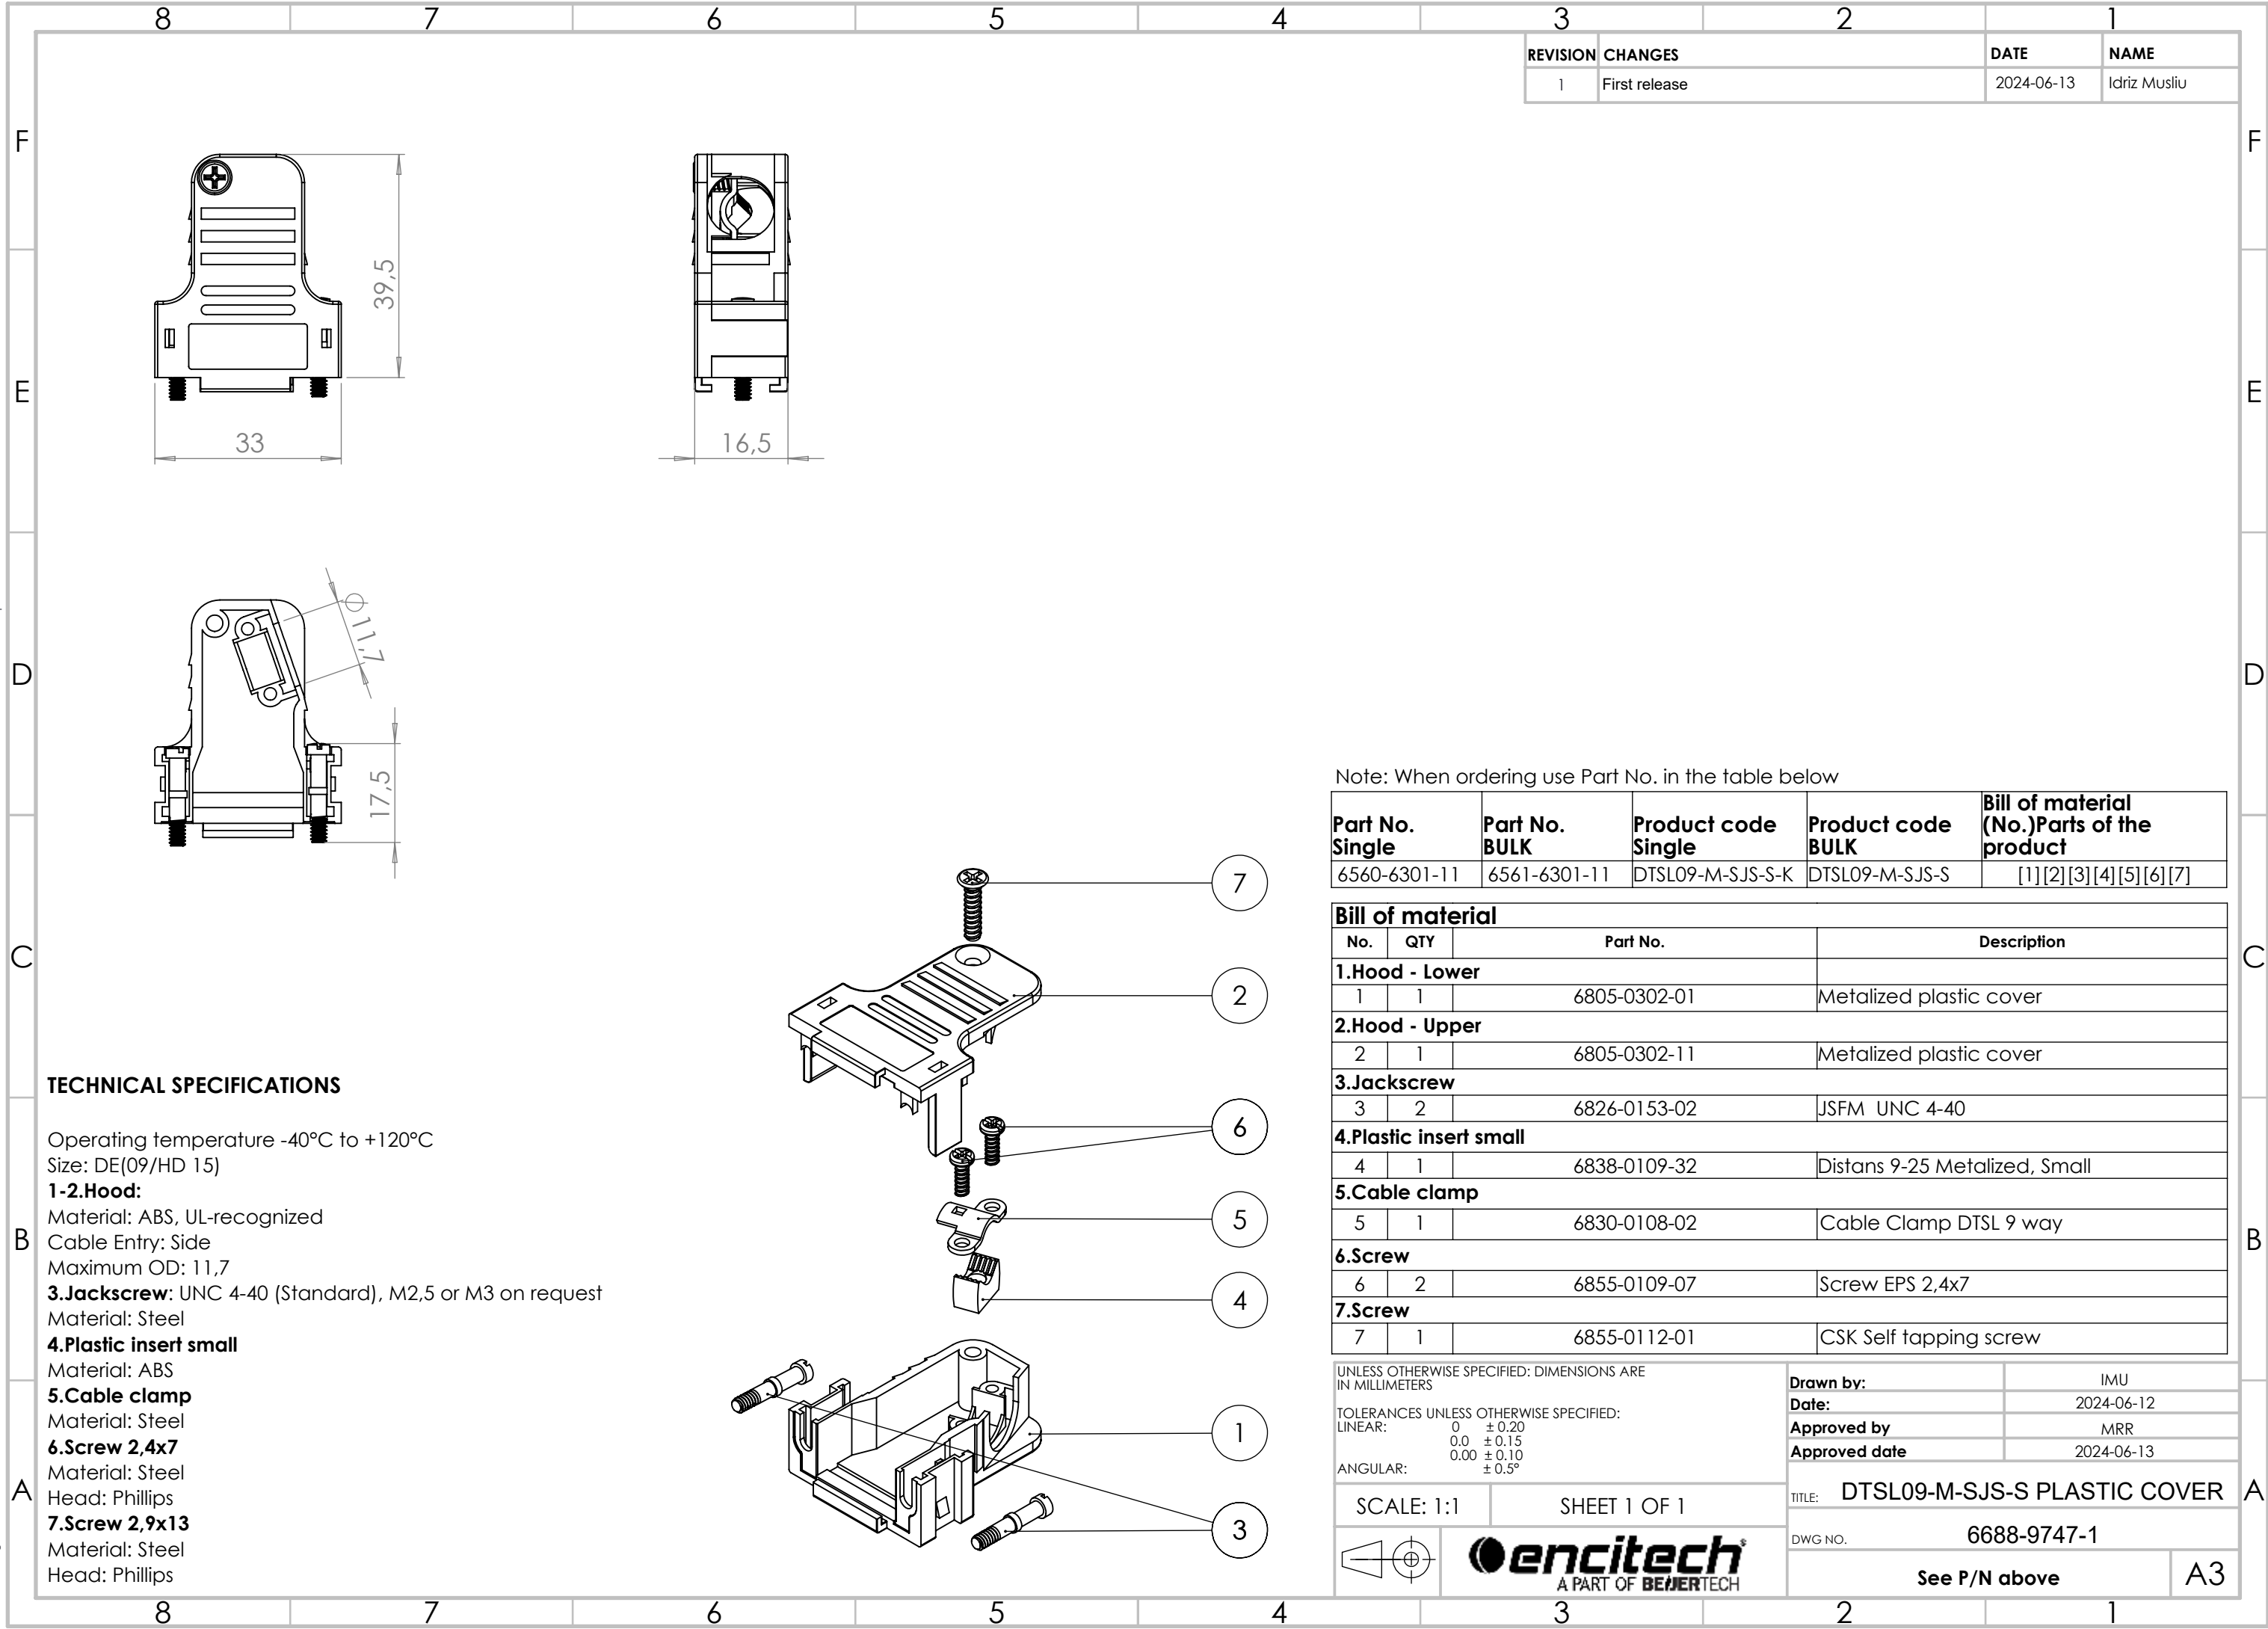

TECHNICAL SPECIFICATIONS

Operating temperature -40°C to +120°C
Size: DE(09/HD 15)

1-2.Hood:

Material: ABS, UL-recognized
Cable Entry: Side
Maximum OD: 11,7

3.Jackscrew: UNC 4-40 (Standard), M2,5 or M3 on request
Material: Steel

4.Plastic insert small

Material: ABS

5.Cable clamp

Material: Steel

6.Screw 2,4x7

Material: Steel
Head: Phillips

7.Screw 2,9x13

Material: Steel
Head: Phillips

Note: When ordering use Part No. in the table below

Part No. Single	Part No. BULK	Product code Single	Product code BULK	Bill of material (No.)Parts of the product
6560-6301-11	6561-6301-11	DTSL09-M-SJS-S-K	DTSL09-M-SJS-S	[1][2][3][4][5][6][7]

Bill of material

No.	QTY	Part No.	Description
1.Hood - Lower			
1	1	6805-0302-01	Metalized plastic cover
2.Hood - Upper			
2	1	6805-0302-11	Metalized plastic cover
3.Jackscrew			
3	2	6826-0153-02	JSFM UNC 4-40
4.Plastic insert small			
4	1	6838-0109-32	Distans 9-25 Metalized, Small
5.Cable clamp			
5	1	6830-0108-02	Cable Clamp DTSL 9 way
6.Screw			
6	2	6855-0109-07	Screw EPS 2,4x7
7.Screw			
7	1	6855-0112-01	CSK Self tapping screw


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE
IN MILLIMETERS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

LINEAR: 0 ± 0.20
0.0 ± 0.15
0.00 ± 0.10
ANGULAR: ± 0.5°

SCALE: 1:1

SHEET 1 OF 1



encitech
A PART OF BEIJERTECH

Drawn by:	IMU
Date:	2024-06-12
Approved by	MRR
Approved date	2024-06-13

TITLE: DTSL09-M-SJS-S PLASTIC COVER

DWG NO. 6688-9747-1

See P/N above

A3