
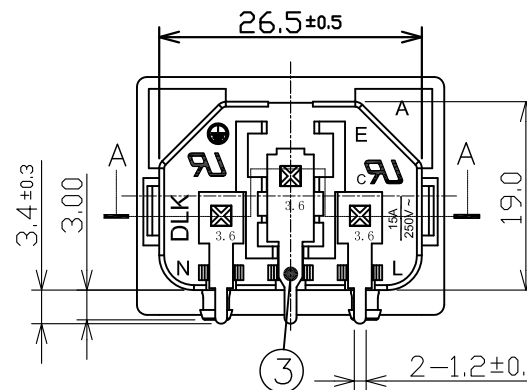
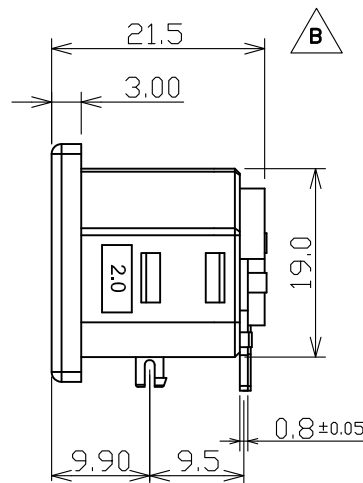



符合"DLK环境管理物质技术标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO
ECN NO.11085	C	20111116	扩大安规使用范围,取消字码A010197	刘三东	李如均
ECN NO.12005	D	20120327	增加CUL标志	刘三东	李如均
KSECN14011	E	20140516	转昆山发行	王莉	李如均

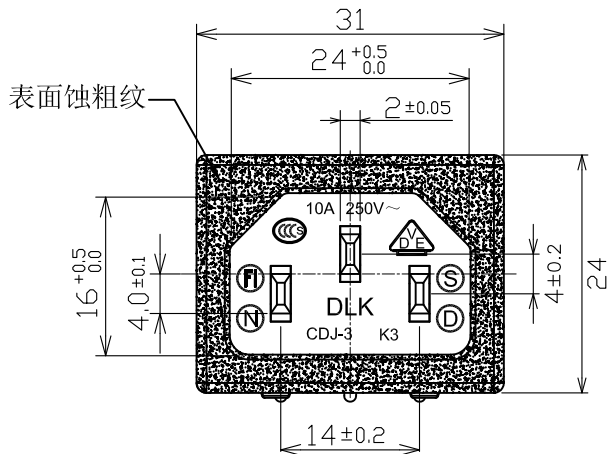


NOTE:

- MATERIAL:
 - Housing: PA66 UL94v-0, color: Black
 - Contact: Copper alloy
 - Soldering Pin: Copper alloy
- PLATING:
 - Contact: Nickel plated overall
 - Soldering Pin: Sn plated, Nickel underplated
- MECHANICAL:
 - Mating force: 10~50N
 - Unmating force: 60N Max
 - Durability: 5000 cycles
- ELECTRICAL:
 - Current Rating: 25/7A
 - Voltage Rating: 125/250V
 - Dielectric strength: 2000V AC FOR 1 minute
 - Insulation Resistance: 100MΩ Min.
 - Contact Resistance: 30mΩ Max
- OPERATING TEMPERATURE: -55°C to +85°C
- PACKING: BOX

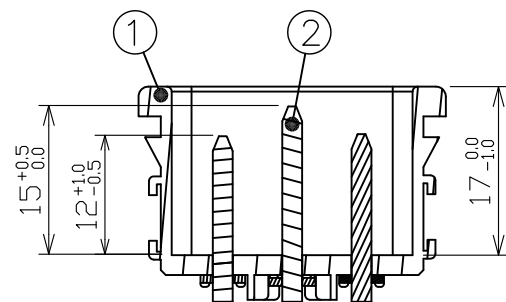



SECTION A-A

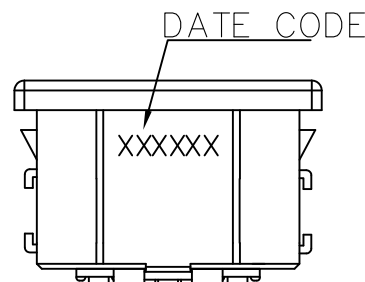

DATE CODE NOTE:

X X X X X X

Line(A-E)
Date(0-9)
Month(0-9)
Year(0-9)

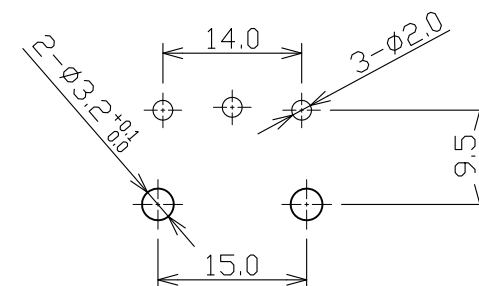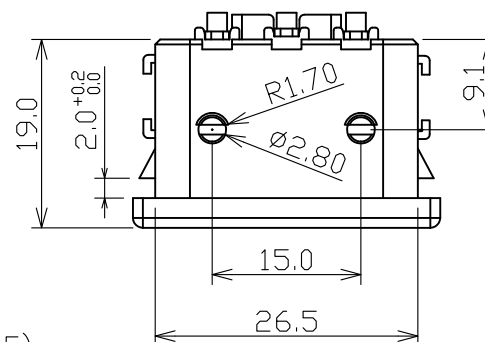

RECOMMENDED PCB LAYOUT

TOLERANCE: ±0.05mm

3	Soldering Pin	3	Copper alloy	TIN
2	Contact Pin	3	Copper alloy	NICKEL
1	INSULATOR	1	PA66+30%GF UL 94V-0	BLACK
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	Ø

德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD				
C 名称 TITLE:	CDJ-3K-30-B2 AC SOCKET			
档案名称 FILE NAME:	C-ACT3K-00-09	料号 PART NO:	73K03B43090	
DRAWING	刘三东	CHECKED	李如均	APPROVED 严成胜
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1