



REV.	SPECIFICATION	ECN NO.	APPD.







Material:
Housing: PBT, UL94V-0.
Contacts: Brass, Gold Plated on Contact Area and Gold Flash on Solder Tail over Nckel 30u".
Shell: Steel, Nickel Plated 80u".
Electrical Characteristics:
Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max.
Operating Temperature: -20°C~+70°C.
***RoHS Compliant**

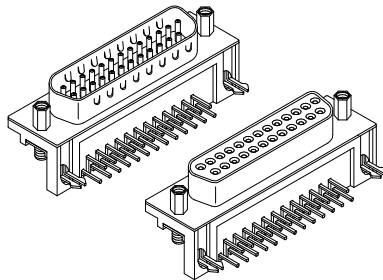

Male

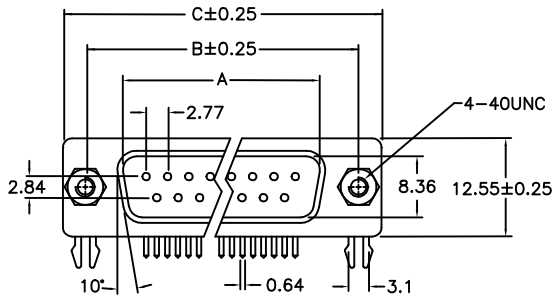

Female

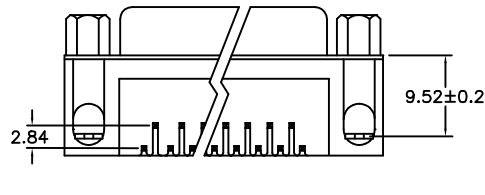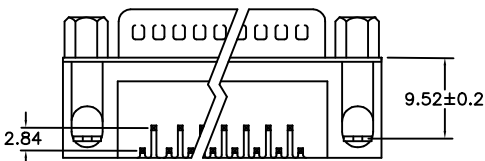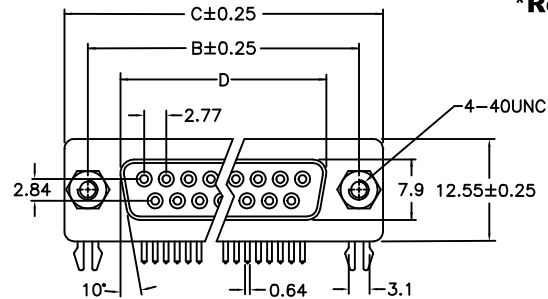

P.C. Board Layout

7906-xxMAA 7906-xxFAA
Series Position M: Male A:With Grounding Forks and With Jack Screws Attached
F: Female

Position	Dimension			
	A	B	C	D
9	16.92	24.99	30.81	16.33
15	25.25	33.32	39.14	24.66
25	38.96	47.04	53.04	38.38
37	55.42	63.50	69.32	54.84

Tolerances	Dwg. No.	7906D03001
x = ±0.5	Projection	
.x = ±0.25	Unit	mm
.xx = ±0.15	Scale	1:1
	Drawn By	Martin 11/25'22

Title:	7906 Series D-SUB Right Angle Type
Ø512	

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 7906-xxMAA&7906-xxFAA			
SHEET	1/1	Ver.No.	A7