

DESCRIPTION: M8 MALE - PANEL MOUNT (REAR) - SOLDER CUP - 4 POS.


SPECIFICATIONS:

MATERIALS:
 HOUSING: PBT, UL94 V-0, BLACK
 CONTACTS: GOLD PLATED BRASS (SEE P/N KEY BELOW)
 NUT & WASHER: NICKEL PLATED BRASS
 SHELL: NICKEL PLATED BRASS
 ORING: EPDM, BLACK


ELECTRICAL:
 RATED CURRENT: 3A
 RATED VOLTAGE: 60V
 INSULATION RESISTANCE: 100 MOhms MIN.
 CONTACT RESISTANCE: 10 mOhms MAX.

ENVIRONMENT:
 OPERATING TEMPERATURE: -40°C TO +85°C
 WATER PROOF: IP67

MAX WIRE AWG: 24
 MAX TORQUE: 1.25 in-lbs

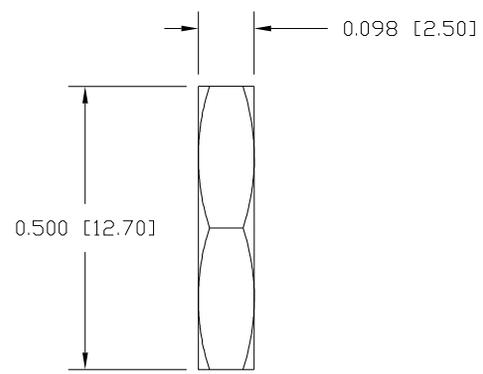

NUT



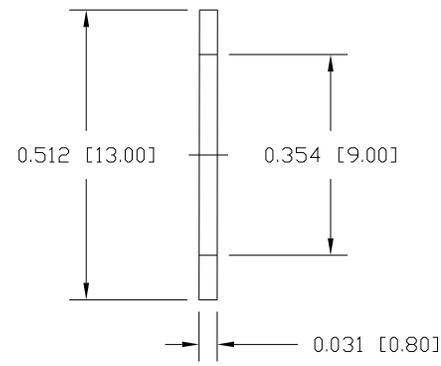


WASHER

NOTE:
 NUT AND WASHER INTENDED TO BE INSTALLED OUTSIDE PANEL. CAN OMIT WASHER TO INCREASE PANEL THICKNESS

855-004-103R00Y

1 = GOLD FLASH
 4 = 10u" GOLD

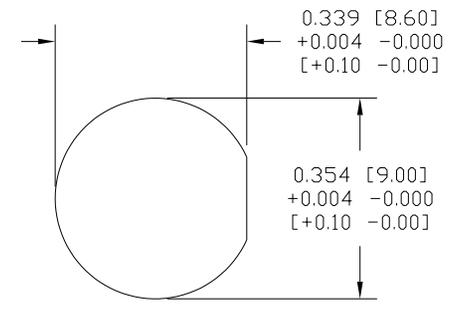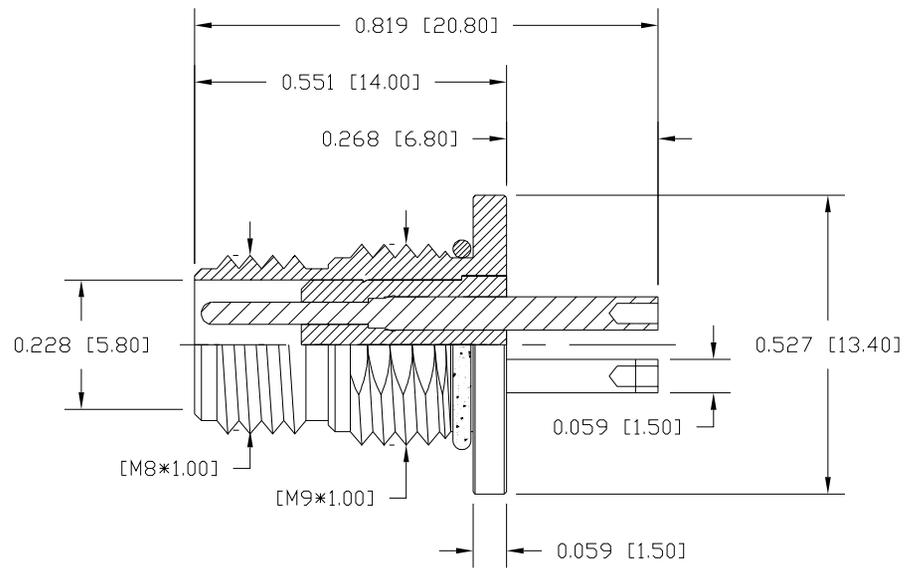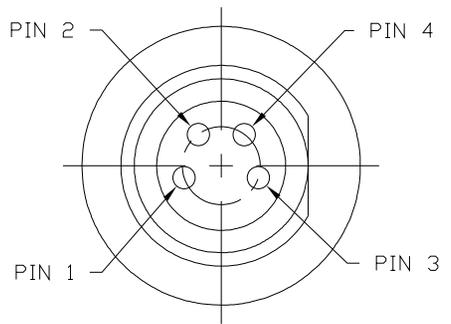

PANEL CUTOUT

RoHS COMPLIANT

UNITS = inch [mm]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: M. SIGMON
 DATE: 03/04/2016

NorComp

SCALE: NTS	SHEET 1 OF 1	REV 4
DWG NO. 855-004-103R00Y		