
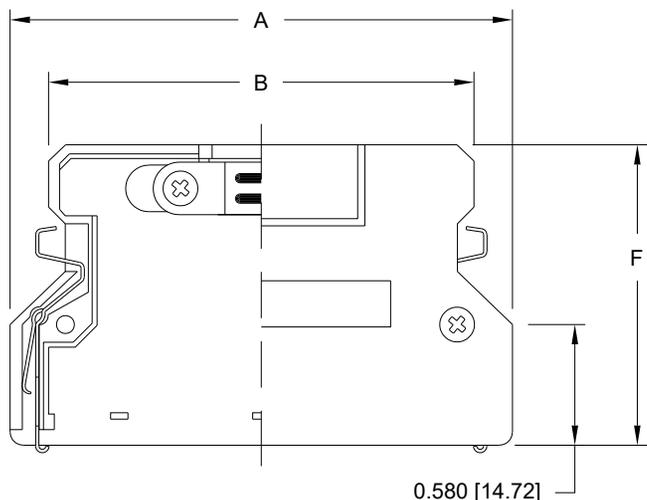


DESCRIPTION: 988 SERIES BACK SHELL KIT

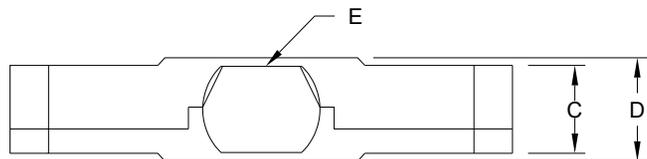

No. OF PINS	DIMENSIONS					
	A	B	C	D	E	F
50	1.988 [50.50]	1.594 [40.50]	0.422 [10.71]	0.498 [12.65]	0.354 [9.00] - 0.433 [11.00]	1.445 [36.70]
68	2.409 [61.20]	2.020 [51.30]	0.421 [10.70]	0.480 [12.20]	0.433 [11.00] - 0.551 [14.00]	1.453 [36.90]
ALL TOLERANCES = ±0.012 [0.30]						

**MATERIAL:**


- BACK SHELL: ZINC PLATED NICKEL OVER COPPER
- JACKSCREWS: STEEL, NICKEL PLATED OVER COPPER
- SCREWS: STEEL, NICKEL PLATED OVER COPPER
- CLAMP: STEEL, NICKEL PLATED

**KIT INCLUDES:**

- 2-BACK SHELL HALVES
- 1-STRAIN RELIEF CLAMP
- 1-CONNECTOR (SOLDER LATCH)
- 2-STRAIN RELIEF SCREWS  
(FLAT HEAD M2.6)
- 2-BACK SHELL SCREWS  
(FLAT HEAD M2.6)
- 2-SPRING CLIPS

**BACK SHELL KIT  
PART NUMBER  
988-YYY-130L121**

- SERIES \_\_\_\_\_
- POSITIONS \_\_\_\_\_
- 050 \_\_\_\_\_
- 068 \_\_\_\_\_
- CONTACTS \_\_\_\_\_
- SOLDER \_\_\_\_\_
- MATERIAL \_\_\_\_\_
- 30 = DIE CAST (NICKEL)
- RoHS COMPLIANT \_\_\_\_\_
- L = LOW TEMP. PROCESS
- COLOR \_\_\_\_\_
- 12 = METAL(IZED)
- PUT-UP \_\_\_\_\_
- 1 = KIT




STRAIN RELIEF CLAMP




STRAIN RELIEF SCREW



BACK SHELL SCREW



SPRING CLIP



RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

C. SMITH

DATE:

04/18/2008

NorComp

SCALE: NTS

SHEET 1 OF 3

REV 7

DWG NO. 988-YYY-130L121

DESCRIPTION: CONNECTOR FOR 988 SERIES BACK SHELL KIT


**SPECIFICATIONS:**

**MATERIALS:**  
 HOUSING: THERMOPLASTIC, BLACK PBT UL94V-0  
 CONTACTS: PHOSPHOR BRONZE  
 5u" GOLD MATING AREA  
 100u" MIN TIN SOLDER AREA  
 FRONT SHELL: STEEL, NICKEL PLATED OVER COPPER



**ELECTRICAL:**  
 RATED CURRENT: 0.5A  
 DIELECTRIC WITHSTANDING: 500VAC  
 INSULATION RESISTANCE: 500 MOhms MIN.  
 CONTACT RESISTANCE: 35 mOhms MAX.

**ENVIRONMENT:**  
 OPERATING TEMPERATURE: -40°C TO +85°C

**MAX RECOMMEND WIRE AWG:** 22 AWG

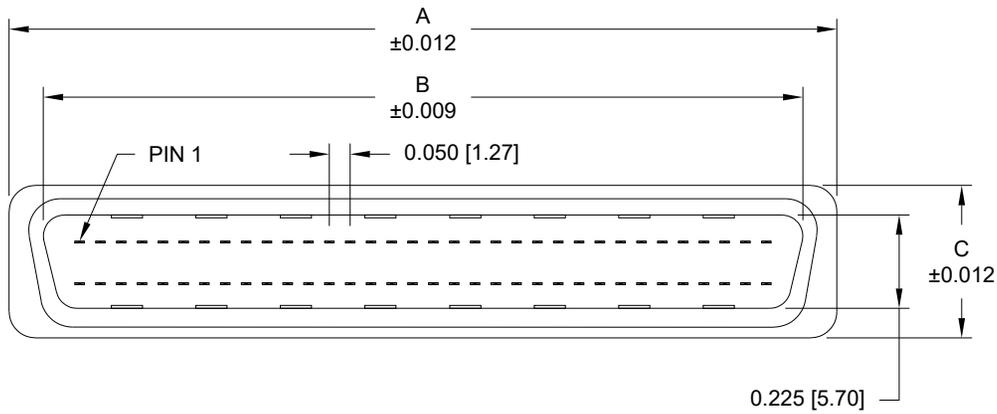

No. OF PINS	DIMENSIONS		
	A	B	C
50	1.545 [39.30]	1.372 [34.85]	0.366 [9.30]
68	1.996 [50.70]	1.825 [46.35]	0.366 [9.30]

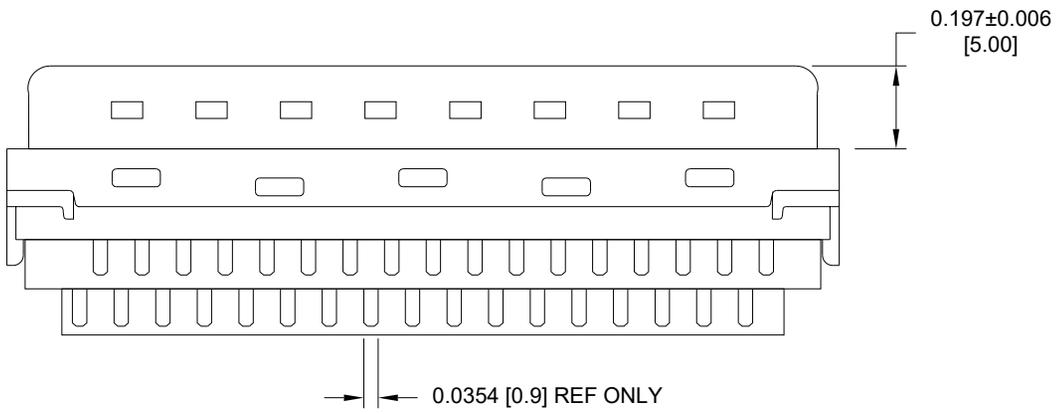

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING






THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
**C. SMITH**  
 DATE:  
**04/18/2008**




**NorComp**

SCALE: NTS	SHEET OF 2 OF 3	REV 7
DWG NO. <b>988-YYY-130L121</b>		

**50 POSITION**

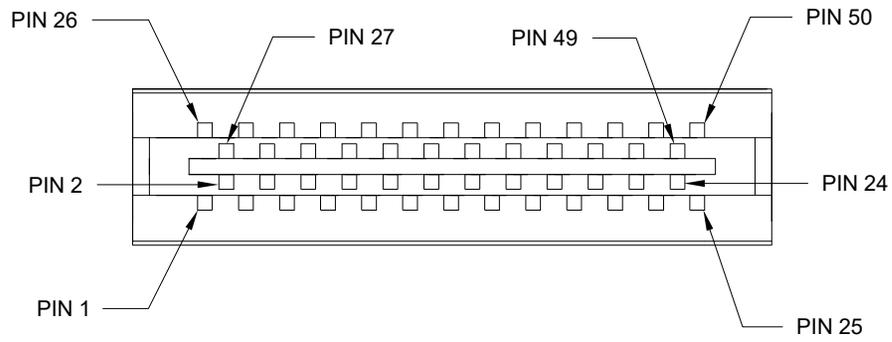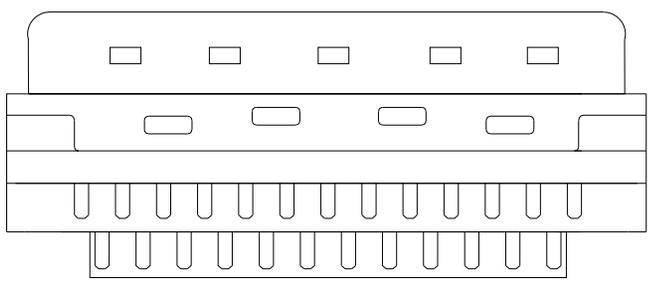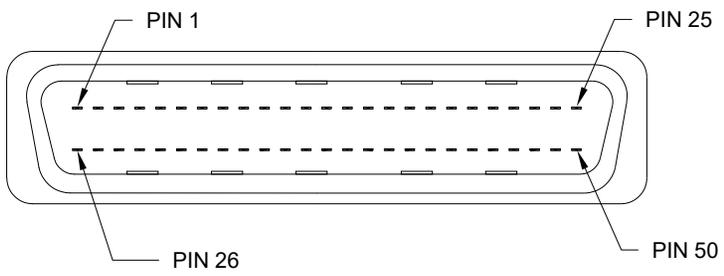

**68 POSITION**

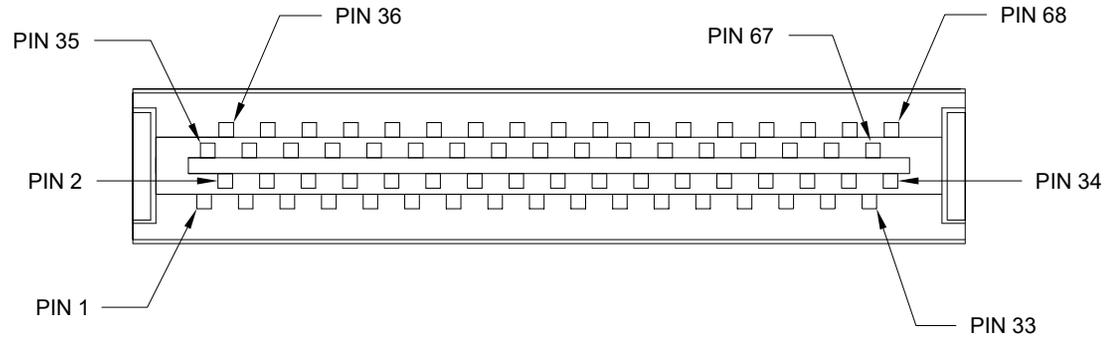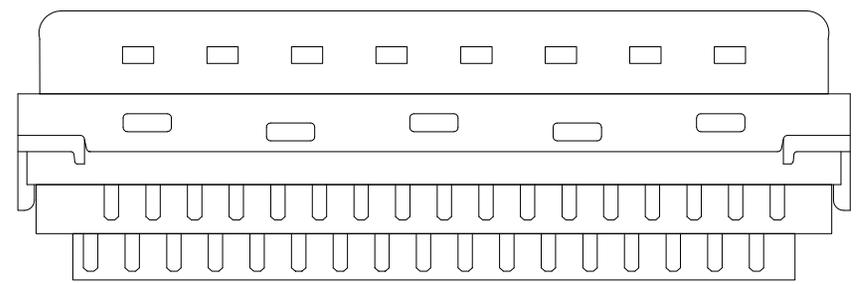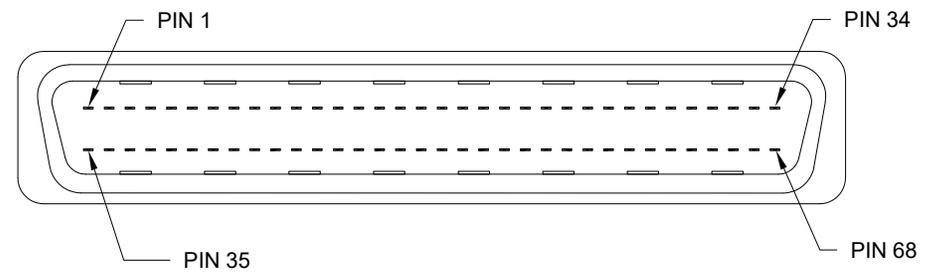

**RoHS COMPLIANT**

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
**C. SMITH**  
DATE:  
**04/18/2008**

**NorComp**

SCALE: NTS	SHEET 3	OF 3	REV 7
DWG NO.		988-YYY-130L121	