




1 2 3 4 5 6 7 8

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LENI670120	2016/05/24	Jimmy Acerá	Rotate Conn.3 Key position by 180°

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

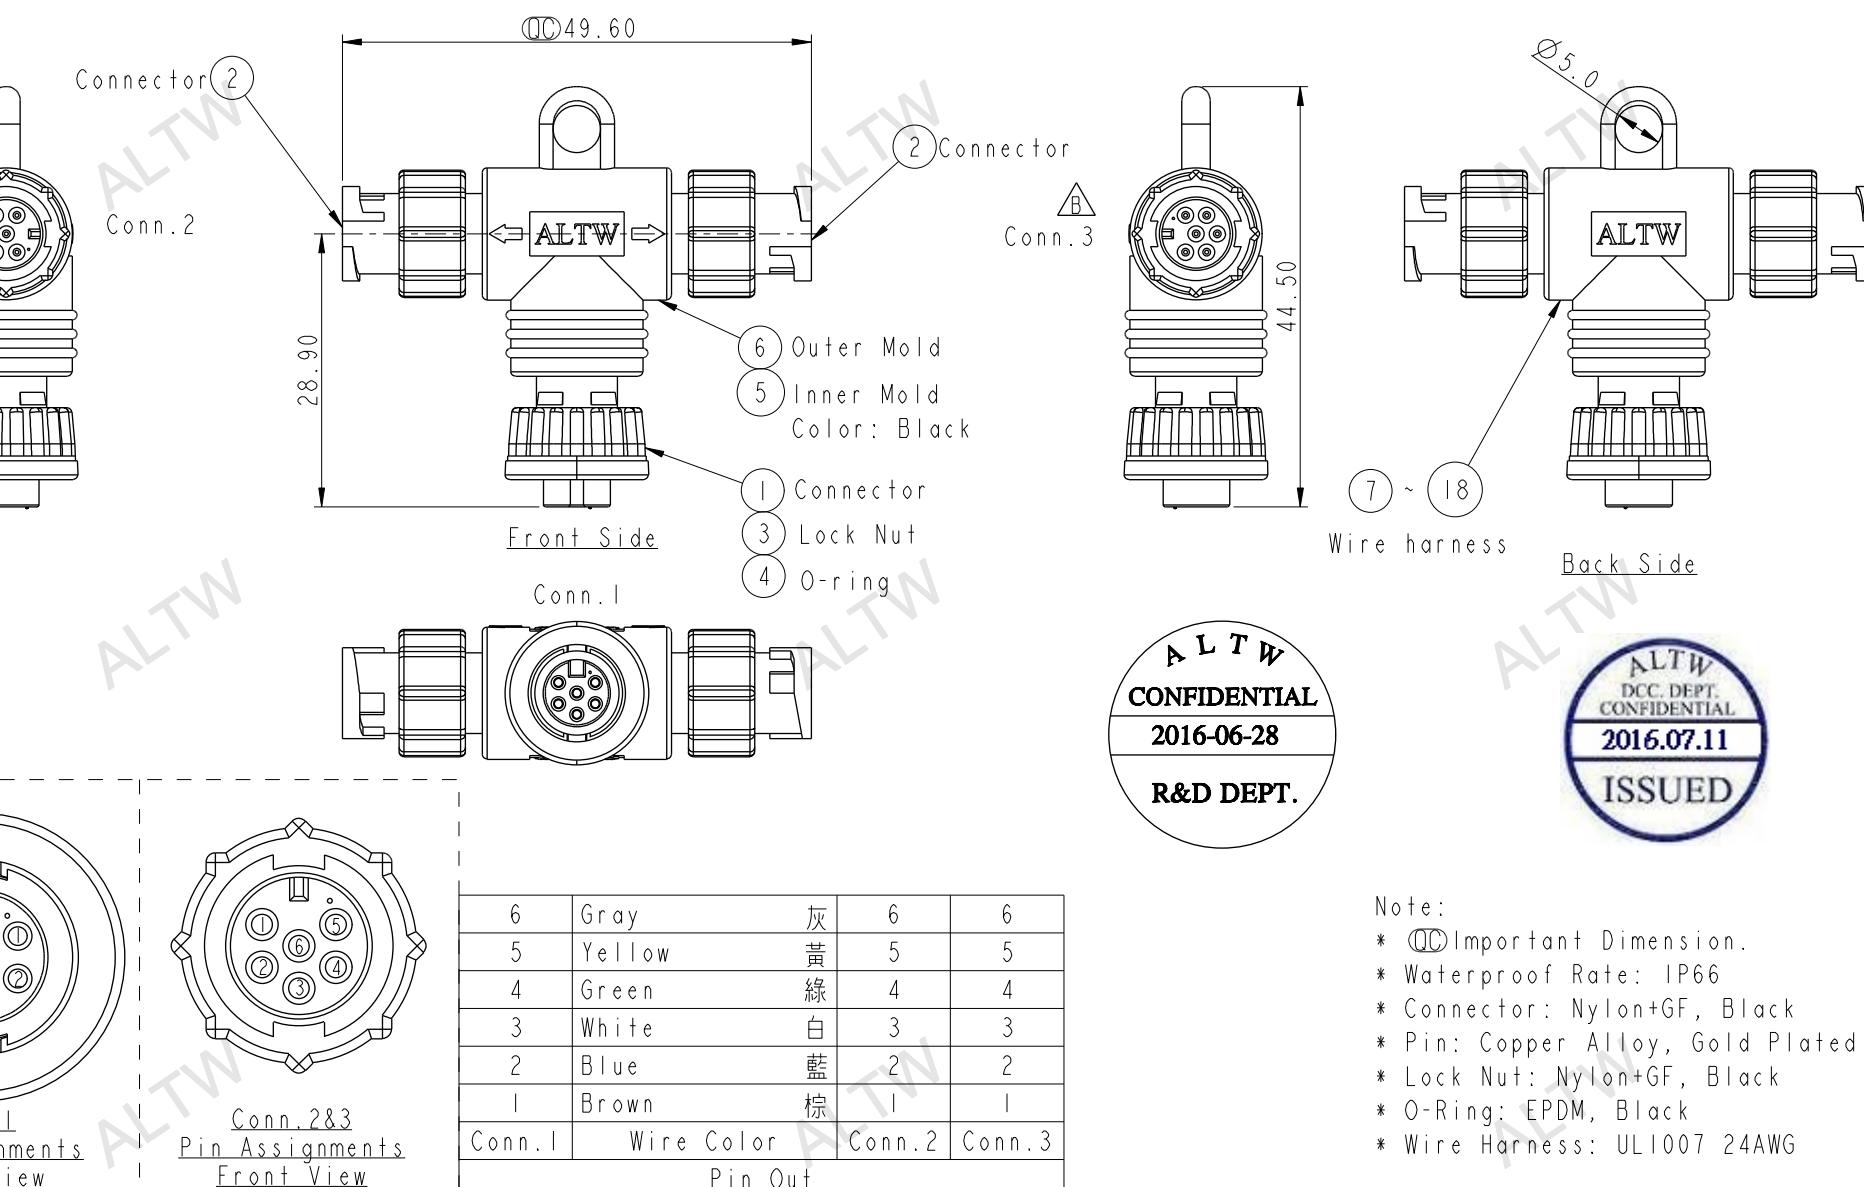

Note:

- \* Ø Important Dimension.
- \* Waterproof Rate: IP66
- \* Connector: Nylon+GF, Black
- \* Pin: Copper Alloy, Gold Plated
- \* Lock Nut: Nylon+GF, Black
- \* O-Ring: EPDM, Black
- \* Wire Harness: UL1007 24AWG

UNIT:mm		TITLE: Mini T Adaptor Lock 6Pin FMM Conn FMM Pin			ITEM NO	AA-060606-FMM-TL001	DRAWN BY	Jimmy Acerá	DATE	2016/06/28						
TOLERANCE	$\pm 0.5$ mm			SCALE	5:4	SIZE	A4	SHEET	1 OF 1	DWG NO	AA-060606-FMM-TL001	CHECKED BY	Nick Chang	DATE	2016/06/28	
REV.	B			WC-REV.	A.1			(QC) Inspection item			CUSTOMER	ALTW	APPROVED BY	Kevin Hu	DATE	2016/06/28
1	2	3	4	5	6	7	8	FMW10702-01-02A1								

Amphenol LTW  
安費諾亮泰企業股份有限公司