



ISS.	AMEND	DATE
1	ISSUED	24/06/16

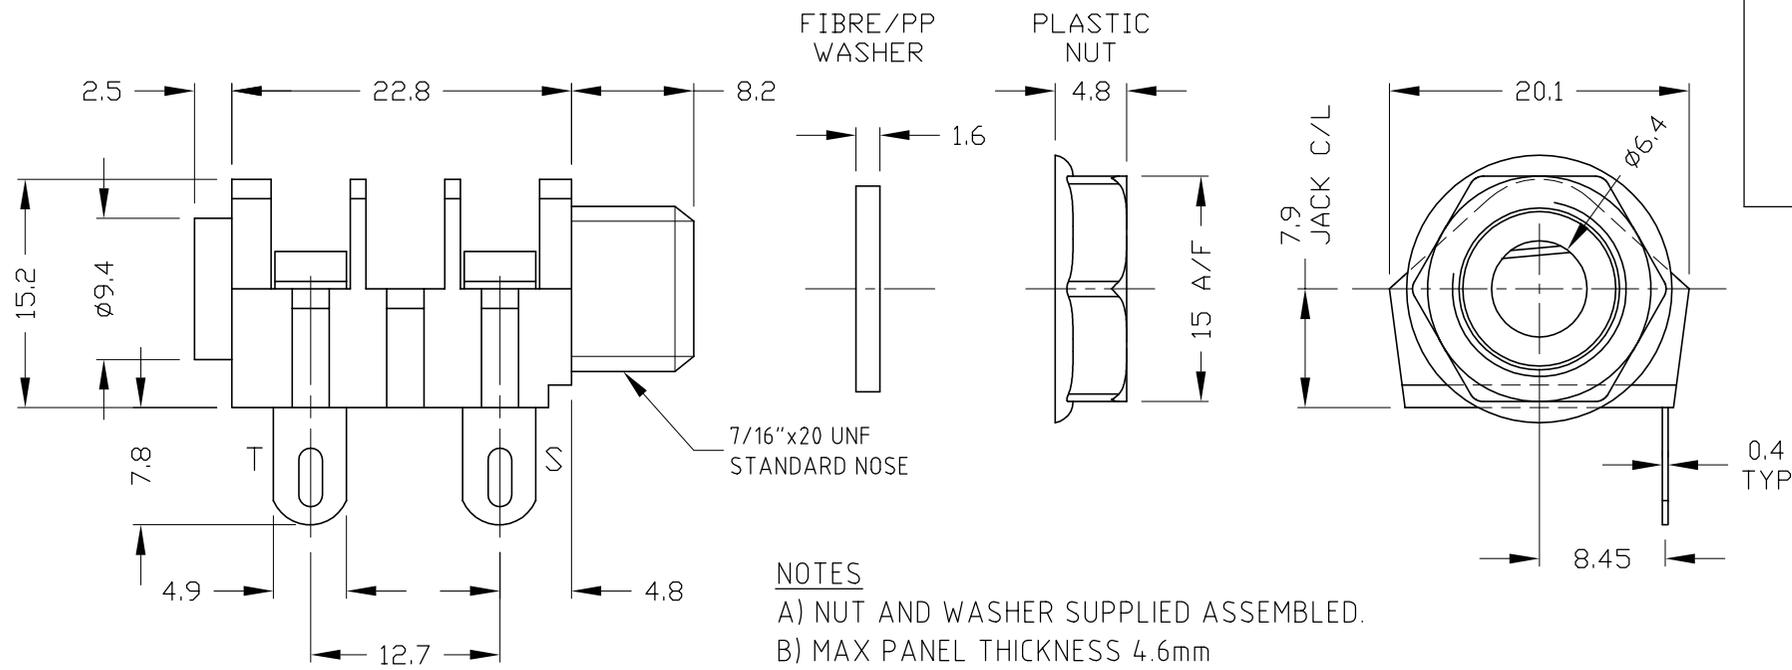

NOTES
 A) NUT AND WASHER SUPPLIED ASSEMBLED.
 B) MAX PANEL THICKNESS 4.6mm

SPECIFICATION

Withstand voltage: 2000V DC Min.
 Maximum Current: 5A
 Temperature Rating: -10° C to +70° C
 Life (Minimum): 10,000+ Operations
 Nominal Contact Resistance: <50mΩ

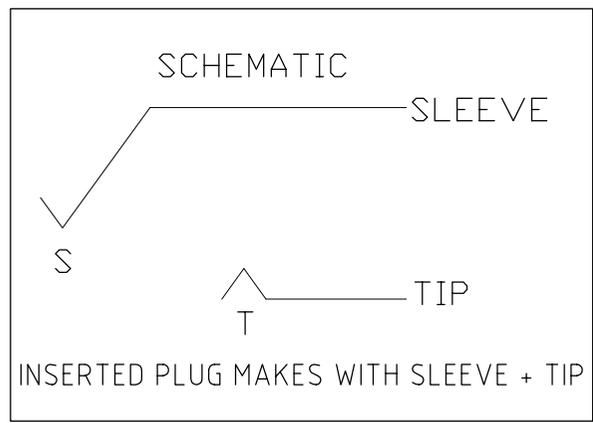

RoHS
 COMPLIANT

TOLERANCE
 NO DEC. PLACE ±
 1 DEC. PLACE ±
 2 DEC. PLACE ±
 HOLE Ø ±
 ANGLES ±
 UNLESS OTHERWISE STATED

Cliff Electronic Components Ltd.
 76 Holmehorpe Avenue, Holmehorpe Industrial Estate,
 Redhill, Surrey, RH1 2PF, England, UK
 Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.
 MATERIAL: NYLON / NiAg / FIBRE / PP
 FINISH: AS MOULDED - BLACK / MICROFINISH
 DRAWN: T.J.O. APPROVED: D.P.J.

3rd ANGLE PROJECTION:
 TITLE: S2/SNS SOLDER TAG - ASSEMBLED
 DRWG. No. CL1130A

DO NOT SCALE
 FORM: A4DRWGH

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 1991