
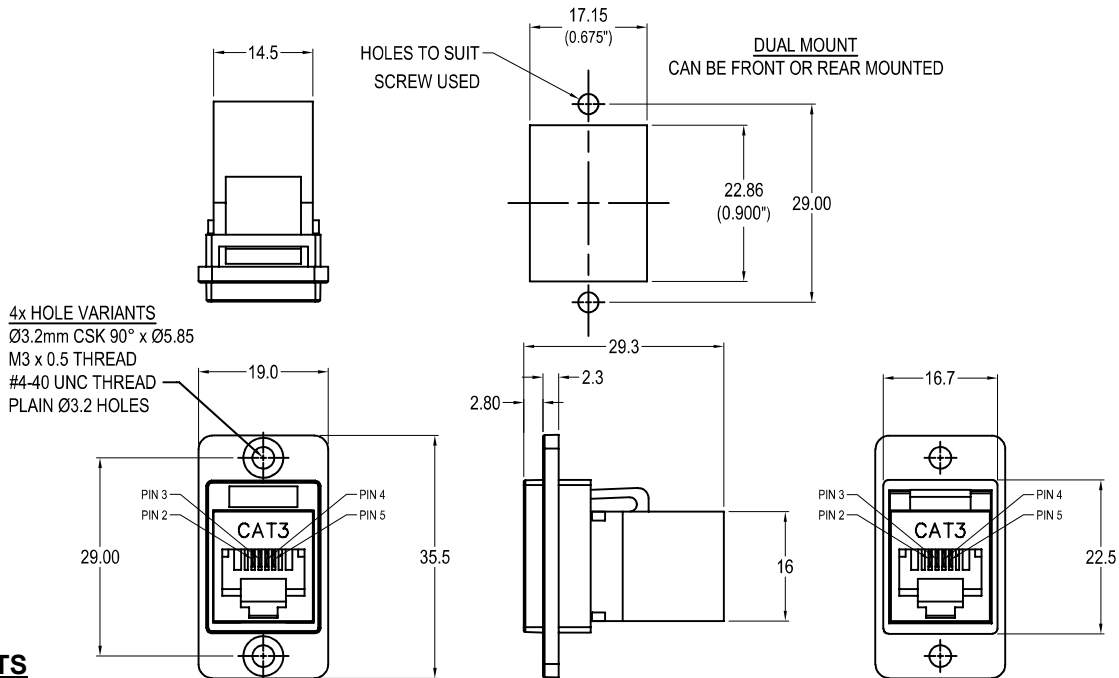


CLIFF

DUALSLIM CAT3 RJ11 6P4C METAL FRAME FEEDTHROUGH CONNECTOR

Can be front or rear mounted in the panel

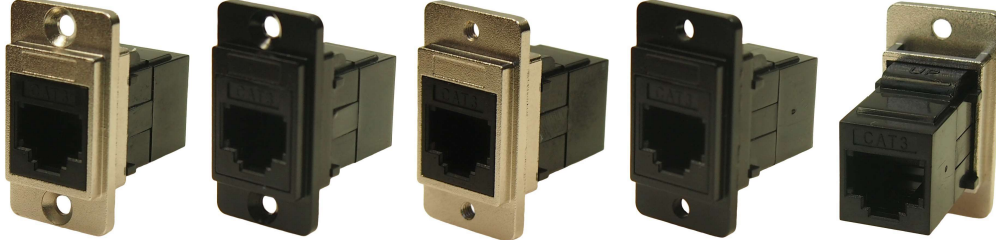

VARIANTS

Part No.

CP30723M

DUALSLIM Cat3 RJ11 6P4C Nickel frame, CSK holes

CP30723MB

DUALSLIM Cat3 RJ11 6P4C Black metal frame, CSK holes

CP30723M3

DUALSLIM Cat3 RJ11 6P4C Nickel frame, M3 holes

CP30723MB3

DUALSLIM Cat3 RJ11 6P4C Black metal frame, M3 holes

CP30723M440

DUALSLIM Cat3 RJ11 6P4C Nickel frame, #4-40 holes

CP30723MB440

DUALSLIM Cat3 RJ11 6P4C Black metal frame, #4-40 holes

CP30723MX1

DUALSLIM Cat3 RJ11 6P4C Nickel frame, Ø3.2 PLAIN holes

CP30723MBX1

DUALSLIM Cat3 RJ11 6P4C Black metal frame, Ø3.2 PLAIN holes

Feedthrough Features

- Fits standard rectangular cutout.
- Front or rear mounting through the panel.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

1. RJ11 In-Line Coupler:
PC/ABS, UL 94V-0, Black colour
2. RJ11 In-Line Coupler Contact:
Phosphor Bronze, 3-50 micro inches
gold plating over nickel plate.
3. PCB: FR4, UL 94V-0
4. Frame: Diecast, Nickel or Black plated

Performance:

1. Operating temperature: Min -10°C Max +60°C