

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、企业名称权、商号权、域名权、其他合法权益外，本公司保留对涉及发明、实用新型、外观设计、集成电路布图设计、企业名称、商号、域名、其他合法权益的所有权利。

FOR-1755 Rev.1.7






2

3


4

5

6

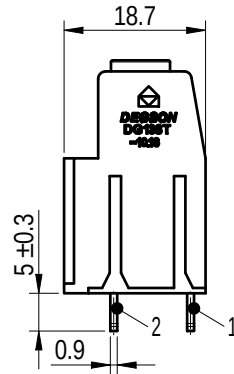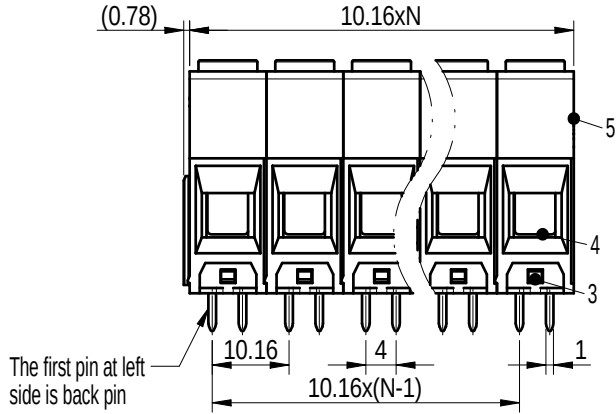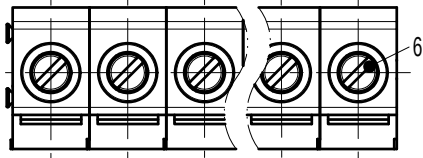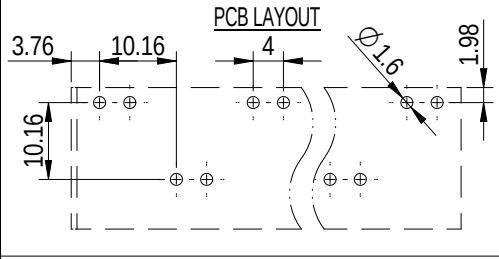

未注公差/General tolerances (mm)															0.1/10 ±2°
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		

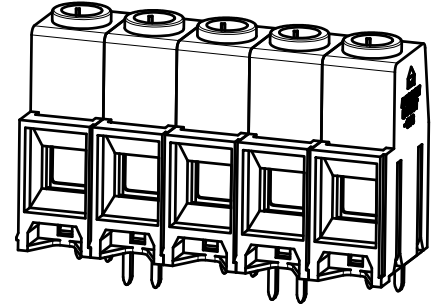

6	Screw	Copper alloy	M4/Ni Plated
5	Housing	PA66	UL94V-0
4	Cage	Copper alloy	M4/Ni Plated
3	Cover	PA66	UL94V-0
2	Pin header 2	Copper	Sn Plated
1	Pin header 1	Copper	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)		600/60	600/60	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/2		
额定电压/电压/Rated Voltage(V)/Current(A)		1000/76		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		AC3500		
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M4, 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)		20~6/0.5~16		
间距/Pitch(mm)/线数范围/Poles		10.16/N=02~12P		
剥线长度/Stripping length(mm)		13~14		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

			MATERIAL:		SURFACE/COLOR:		
APPD: 兰春华			MAT NO./REV: /		MAT STATUS: 批量		
CHKD: 陈招			NAME DG138T-10.16-XXP-1Y-00L(H)				
DRFT: 袁路易							
DRAWING NO.		TYPE		DRAWING STATUS		SCALE	SHEET
200022144		CUSTOMER DRAWING		已发布		1:1	1/1
 A4		 (inch)					

00			袁路易	2022.09.22
REV	ECN	DESCRIPTION	DRFT	DATE

1

2

3

4

5

6