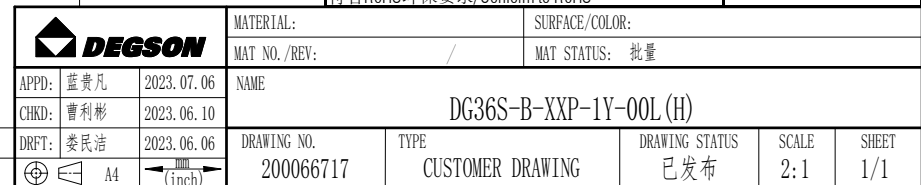


D

3	Screw	Steel	Ni Plated	
2	Pin header	Copper alloy	Sn Plated	
1	Housing	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/20	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)		22~12		
间距/Pitch(mm)/线数范围/Poles		8.25/N=02~22P		
使用温度范围/Operating temperature(°C)		-40~-+105		
符合RoHS环保要求/Conform to RoHS		Yes		

00			委民洁	2023.06.06
REV	ECN	DESCRIPTION	DRFT	DATE