

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicitly authorized in writing. All rights reserved for patent, utility model or designer registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商标权、著作权等权利外，本公司保留对涉及发明、实用新型、外观设计、软件著作权、集成电路布图设计专有权、商标权、著作权等权利的所有权利。

FOR-1755 Rev.1.8

2

3

4




5

6


未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500		±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/30	/	300/10
IEC 标准/IEC Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	450 / 32		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4, 1.2/10.59		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	22~10		
间距/Pitch(mm)/线数范围/Poles	9.50/N=02~26P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~-105		
符合RoHS环保要求/Conform to RoHS	Yes		

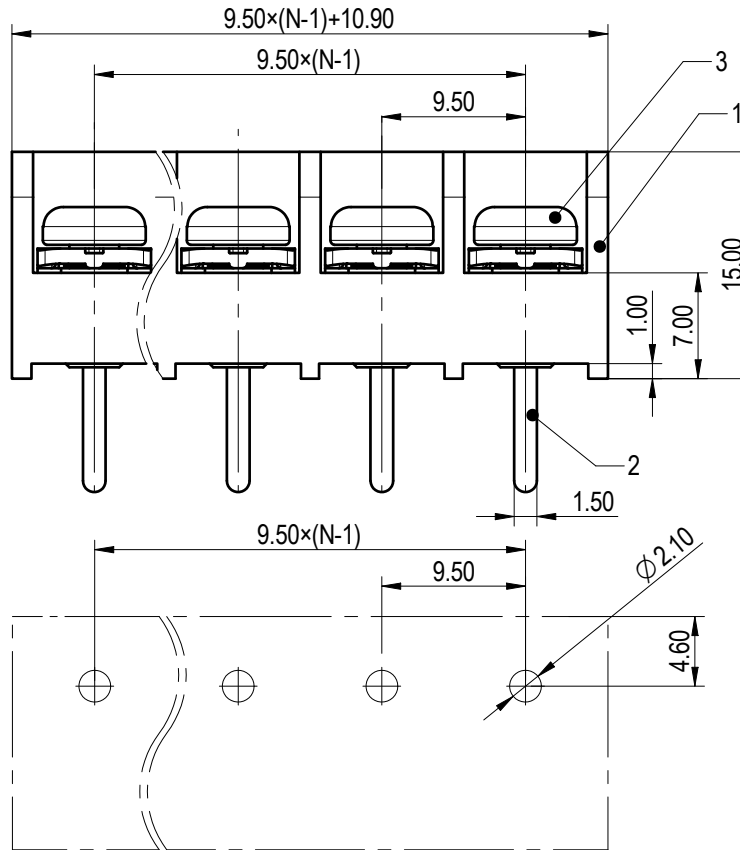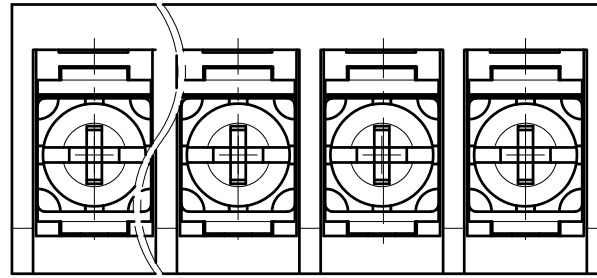

PCB LAYOUT

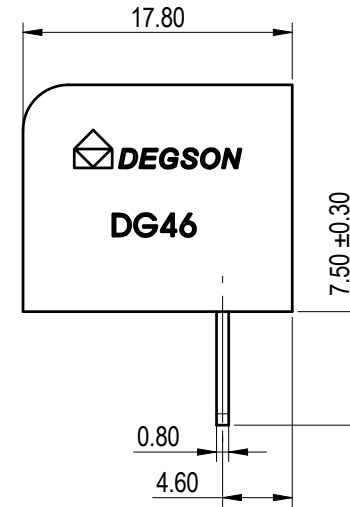

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DEGSON		MATERIAL:		SURFACE/COLOR:	
APPD: 蓝贵凡		2023.05.26		MAT NO./REV: / 00	
CHKD: 曹利彬		2023.05.26		MAT STATUS: 批量	
DRFT: 孙科豪		2023.05.26		NAME	
DRAWING NO. 200196660		TYPE CUSTOMER DRAWING		DRAWING STATUS 已发布	
SCALE 2:1		SHEET 1/1		DG46S-B-XXP-1Y-00L (H)	

00					
REV	ECN	DESCRIPTION	DRFT	DATE	