
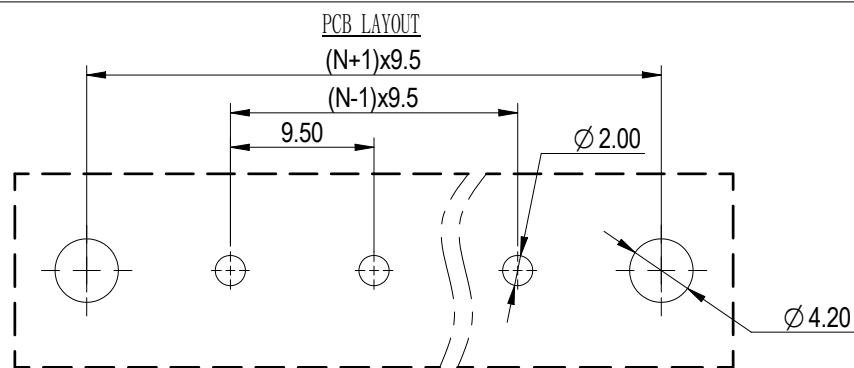
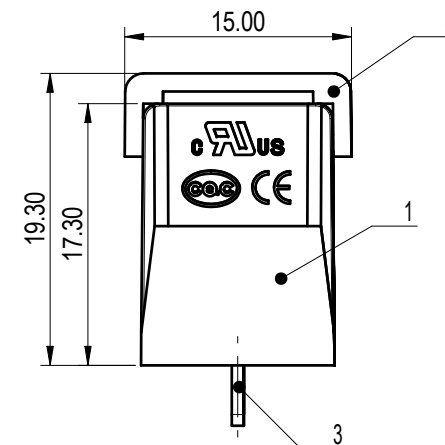
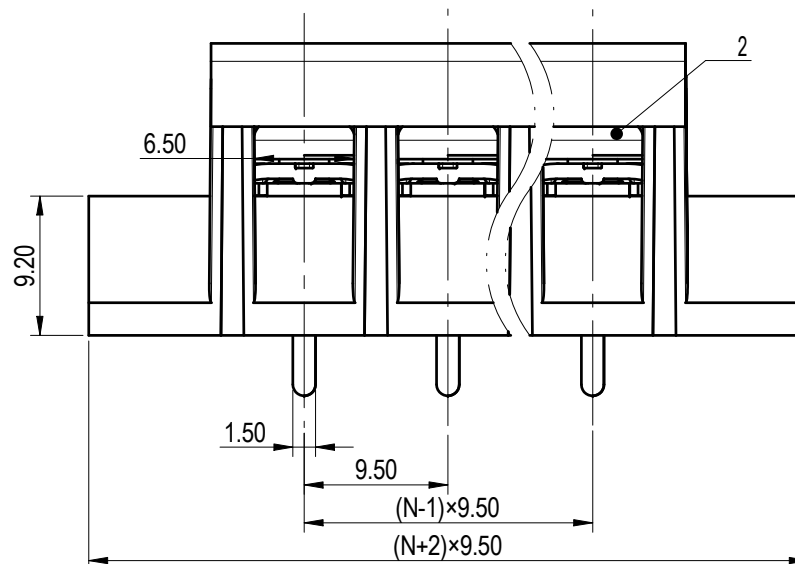


未注公差/General tolerances(mm)	
-----------------------------	--

0.1/10													1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
~3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

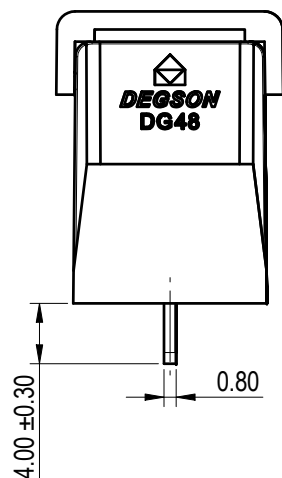

4	Cover	PC	UL94V-2
3	Pin header	Copper alloy	Sn Plated
2	Screw	Steel	Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/20	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M4, 1.20/10.53	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)		22~12	
间距/Pitch(mm)/线数范围/Poles		9.50/N=02~20P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

			MATERIAL:		SURFACE/COLOR:	
APPD: 蓝贵凡 2022.11.24			MAT NO./REV: - / 00		MAT STATUS: 批量	
CHKD: 曹利彬 2022.11.24			NAME DG48C-A-XXP-1Y-00L (H)			
DRFT: 委民洁 2022.11.24			DRAWING NO. 200123001		TYPE CUSTOMER DRAWING	
					DRAWING STATUS 已发布	
					SCALE 2:1	
					SHEET 1/1	