

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or designer registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、集成电路布图设计专有权、商业秘密等权利外，本公司保留对涉及发明、实用新型和外观设计的所有权利。

FOR-1755 Rev.1.8

2

3


4

5



6

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

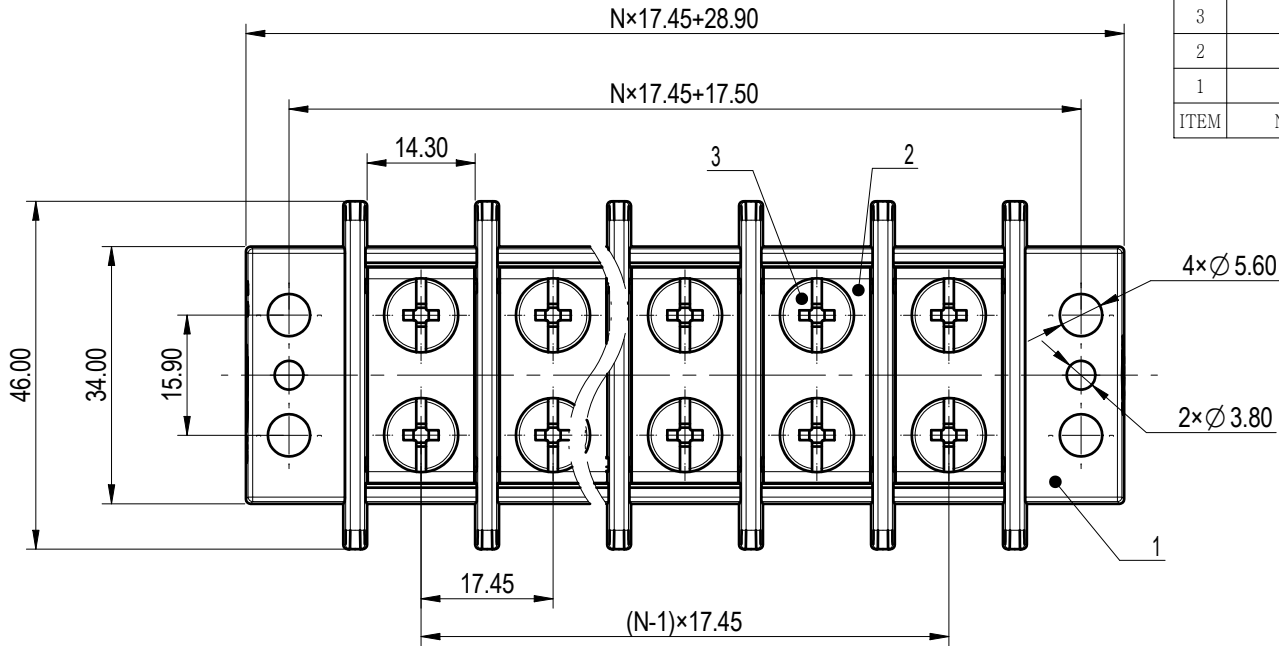

3	Screw	Steel	Zn Plated
2	Current carrier	Copper alloy	Sn Plated
1	Housing	PC	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

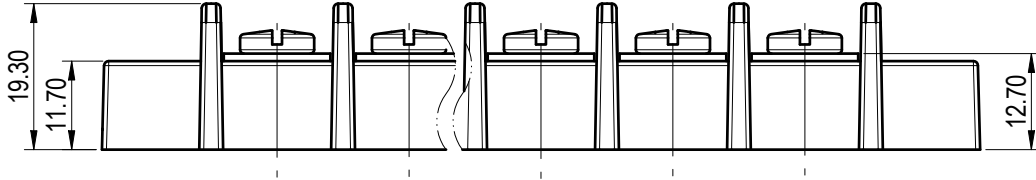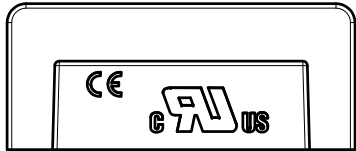

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/30	600/30	/
	600/75	600/75	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M5, 1.9/17.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	10~14 (600V/30A)		
	4~14 (600V/75A)		
间距/Pitch(mm)/线数范围/Poles	17.45/N=02~12P		
使用温度范围/Operating temperature(°C)	-40~+125		
符合RoHS环保要求/Conform to RoHS	Yes		

		MATERIAL:	SURFACE/COLOR:		
APPD: 蓝贵凡 2023.05.16		MAT NO./REV:	- / 00		
CHKD: 曹利彬 2023.05.16		NAME	DG99-A-XXP-1Y-00L(H)		
DRFT: 姜民洁 2023.05.16		DRAWING NO.	TYPE	DRAWING STATUS	SCALE
A4		200194843	CUSTOMER DRAWING	已发布	1:1
					SHEET 1/1

00					
REV	ECN	DESCRIPTION	DRFT	DATE	

1

2

3

4

5

6