


CLIFF

USB3.0 B-B FEEDTHROUGH CONNECTOR

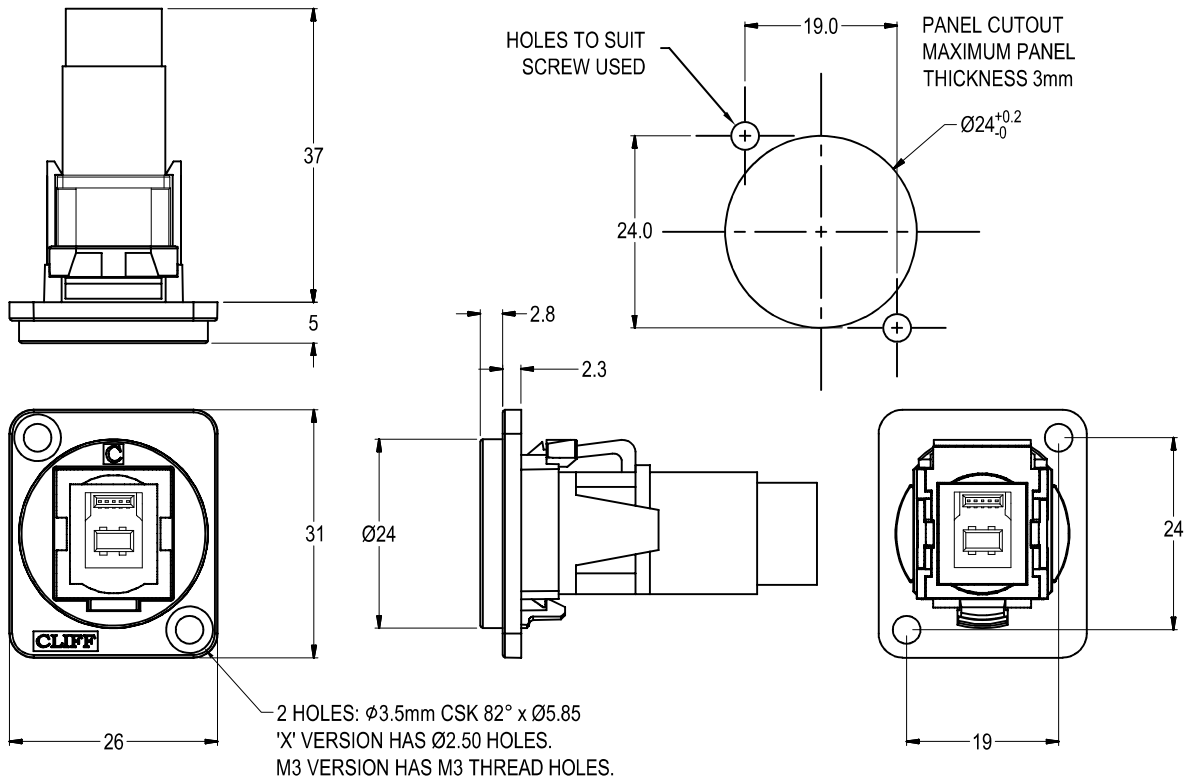

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

VARIANTS

Part No.

CP30204N	USB3.0 B-B Black plastic frame, CSK holes
CP30204NM	USB3.0 B-B Nickel plated metal frame, CSK holes
CP30204NM3	USB3.0 B-B Nickel plated metal frame, M3 holes
CP30204NMB	USB3.0 B-B Black metal frame, CSK holes
CP30204NM3B	USB3.0 B-B Black metal frame, M3 holes
CP30204NX	USB3.0 B-B Black plastic frame, PLAIN holes

Material:

- 1.Insert: ABS
2. Plastic Frame: Polyamide UL94 V2
3. Metal Frame: Diecast, Black or Nickel plated
- 4.Shell: Nickel plated steel
- 5.Contacts: Gold Plated

Notes:

- 1.Voltage rating: 30V AC
- 2.Current rating: 1.8 A max
- 3.Contact resistance: 50mΩ max
- 4.Insulation resistance: 20MΩ min
- 5.Dielectric withstanding voltage: 500V AC
- 6.Operating Temperature: -20°C to 50°C