
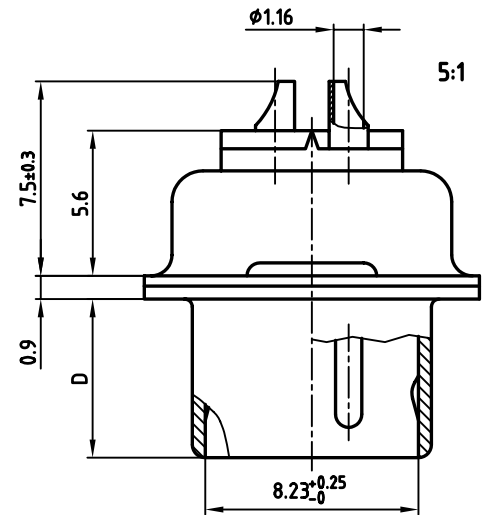

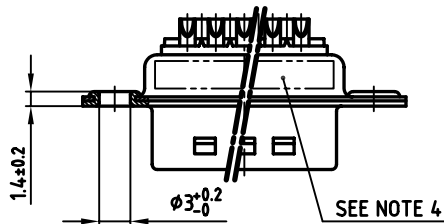


used for:	D-SUB
-----------	-------

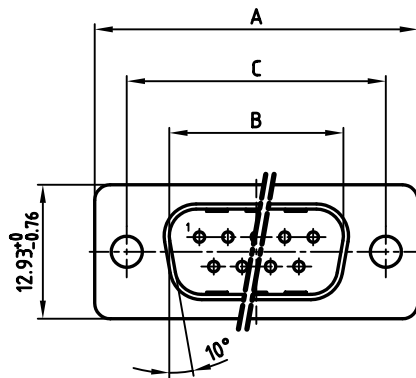

POS.	A -0.76	B $+0.25$	C	D -0.3	Part No.
9	31.19	16.79	25.00 $+0.12$ -0.13	6.12	163C11069X
15	39.52	25.12	33.30 $+0.15$ -0.1	6.12	163C11079X
25	53.42	38.84	47.04 $+0.13$	5.99	163C11089X
37	69.70	55.30	63.50 ± 0.13	5.99	163C11099X

Directive 2002/95/EC
"RoHS"
Compliant

NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
 PLATING: 30µ" HARD GOLD OVER min. 50µ" NICKEL
 SOLDER CUP ACCEPTS CABLE AWG 20
4. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
NOT ALTER CAD DRAWING BY HAND

				tolerance				scale: 2:1 (5:1)			
								material: SEE NOTES			
				2004	date	name		title: D-SUB MALE 9-37pos. SOLDER CUP			
				drawn	29.01.	Lehmenkühler					
				appd.	29.01.	Mickenbecker					
				norm	DIN 41652						
				d-old			dwg no:		AutoCAD 2000	DIN-A	
						16K2A660				3	
rev.	description	date	name			part no:		SEE TABLE		sh: 1/1	