


## Flared Vinyl Insulated Parallel Connectors

**Material:** Tin Plated Copper

**Maximum Electrical Rating:** 75°C, 600V

**Barrel Type:** Tubular

**Insulation:** Vinyl



T= Material Thickness

| HOFFMAN<br>PART NO | WIRE<br>SIZE | WIRE<br>COMBINATION |               | AMPS    | DIMENSIONS (INCHES) |       |       |       |  | UL | TAPE<br>MOUNTED<br>REEL QTY | DIE FOR<br>TAPE<br>MOUNTED | HAND<br>TOOL |
|--------------------|--------------|---------------------|---------------|---------|---------------------|-------|-------|-------|--|----|-----------------------------|----------------------------|--------------|
|                    |              | MIN                 | MAX           |         | L                   | D     | d1    | T     |  |    |                             |                            |              |
| FVP2216            | 22-16        | 2 #22               | 1 #18 + 1 #20 | 9 - 18  | 0.650               | 0.157 | 0.067 | 0.031 |  | N  | NA                          | NA                         | YNM2210      |
| FVP2216/J          | 22-16        | 2 #22               | 2 #18         | 9 - 18  | 0.630               | 0.157 | 0.067 | 0.031 |  | Y  | NA                          | NA                         | or           |
| FVP1614            | 16-14        | 2 #16               | 1 #18 + 1 #20 | 18 - 30 | 0.650               | 0.177 | 0.091 | 0.031 |  | N  | NA                          | NA                         | YNT2216      |
| FVP1614/J          | 16-14        | 2 #22               | 1 #18 + 1 #16 | 18 - 30 | 0.630               | 0.177 | 0.091 | 0.031 |  | Y  | NA                          | NA                         |              |
| FVP1210            | 12-10        | 2 #18               | 2 #16         | 35 - 50 | 0.795               | 0.248 | 0.134 | 0.039 |  | N  | NA                          | NA                         | YNM2210      |
| FVP1210/J          | 12-10        | 2 #18               | 2 #16         | 35 - 50 | 0.807               | 0.268 | 0.134 | 0.039 |  | Y  | NA                          | NA                         | YNT1210S     |


## Straight Nylon Insulated Parallel Connectors

**Material:** Tin Plated Copper

**Maximum Electrical Rating:** 105°C, 600V

**Barrel Type:** Tubular

**Insulation:** 6/6 Nylon

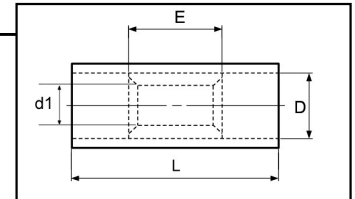

T= Material Thickness

| HOFFMAN<br>PART NO. | WIRE<br>SIZE | WIRE<br>COMBINATION |               | AMPS    | DIMENSIONS (INCHES) |      |      |      |       | UL | TAPE<br>MOUNTED<br>REEL QTY | DIE FOR<br>TAPE<br>MOUNTED | HAND<br>TOOL |
|---------------------|--------------|---------------------|---------------|---------|---------------------|------|------|------|-------|----|-----------------------------|----------------------------|--------------|
|                     |              | MIN                 | MAX           |         | d1                  | L    | D    | E    | T     |    |                             |                            |              |
| NP2216/J            | 22-16        | 2 #22               | 2 #18         | 9 - 18  | .067                | .630 | .126 | .315 | 0.031 | Y  | NA                          | NA                         | YNT2216      |
| NP1614/J            | 16-14        | 2 #22               | 1 #18 + 1 #16 | 18 - 30 | .097                | .630 | .154 | .315 | 0.031 | Y  | NA                          | NA                         | YNT1614      |
| NP1210/J            | 12-10        | 2 #18               | 2 #16         | 35 - 50 | .134                | .807 | .213 | .335 | 0.039 | Y  | NA                          | NA                         | YNT1210S     |


## Flared Nylon Insulated Parallel Connectors

**Material:** Tin Plated Copper

**Maximum Electrical Rating:** 105°C, 600V

**Barrel Type:** Tubular

**Insulation:** 6/6 Nylon

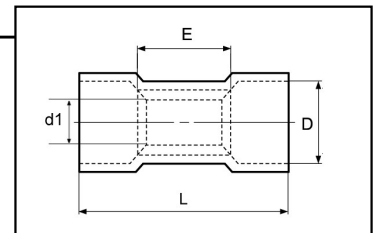

T= Material Thickness

| HOFFMAN<br>PART NO. | WIRE<br>SIZE | WIRE<br>COMBINATION |               | AMPS    | DIMENSIONS (INCHES) |      |      |      |       | UL | TAPE<br>MOUNTED<br>REEL QTY | DIE FOR<br>TAPE<br>MOUNTED | HAND<br>TOOL |
|---------------------|--------------|---------------------|---------------|---------|---------------------|------|------|------|-------|----|-----------------------------|----------------------------|--------------|
|                     |              | MIN                 | MAX           |         | d1                  | L    | D    | E    | T     |    |                             |                            |              |
| FNP2216/J           | 22-16        | 2 #22               | 2 #18         | 9 - 18  | .067                | .630 | .157 | .067 | 0.031 | Y  | NA                          | NA                         | YNT2216      |
| FNP1614/J           | 16-14        | 2 #22               | 1 #18 + 1 #16 | 18 - 30 | .091                | .630 | .177 | .091 | 0.031 | Y  | NA                          | NA                         | YNT1614      |
| FNP1210/J           | 12-10        | 2 #18               | 2 #16         | 35 - 50 | .134                | .807 | .268 | .134 | 0.039 | Y  | NA                          | NA                         | YNT1210S     |

