



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021/03/10	Xiaofeng	New Initial
B	C210737	2021/05/06	Xiaofeng	 X4
C	C221953	2022/12/16	Ruru	 X3

△MSXS-XXBMMC-SL800I



$\triangle C_{XX}$: No. Of Pin—



 Copper Foil



Pin Assignments Front View

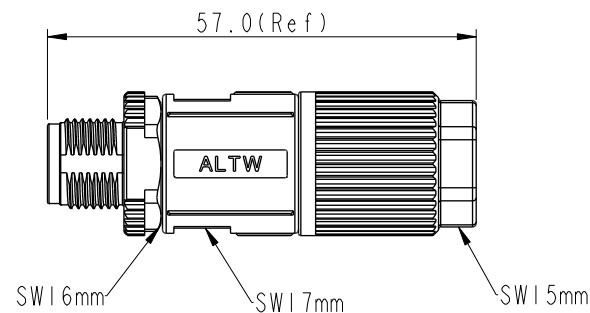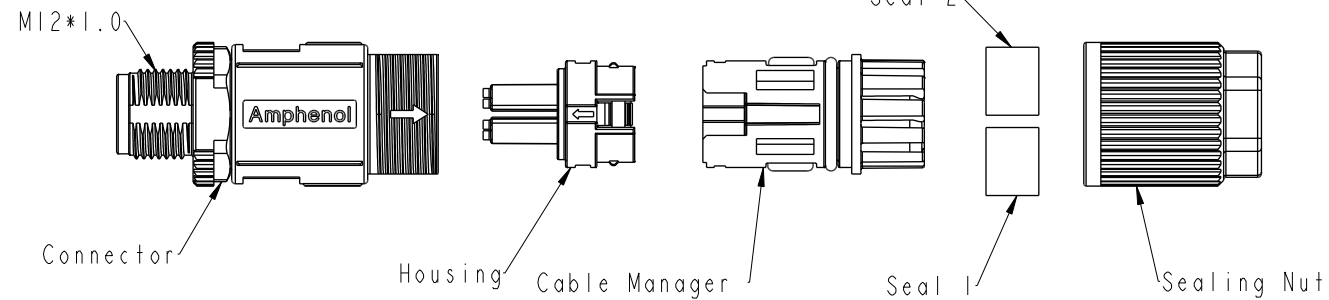

 Note:

- * RoHS Compliant
- *  Important Dimension.
- *  Waterproof Rate: IP68, Mated 1m/24h.
- * Housing: Thermoplastic, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * O-Ring: Silicone, Grey.
- * Cable Manager: Thermoplastic, Black.
- * Sealing Nut: Metal.
- * Seal For Cable OD: $\varnothing 5.0\text{mm} \sim \varnothing 9.0\text{mm}$
- * Applicable Wire gauge (Stranded wire cross section)
24AWG-26AWG.
- * Detailed Applicable Wire Specifications May Vary
Depending On The Actual Wire Construction.

UNIT:mm		TITLE N SEN, M12 X -SHLD, SCREW CABLE W/O SR, M, M, FI CRIMP 			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO		DRAWN BY	DATE	
TOLERANCE	±0.5	SCALE	SIZE	SHEET		OF	DWG NO	CHECKED BY	DATE	
		Free	A4	1		1	MSXS-XXBMMC-SL8001	Li-Feng	2021/03/10	
		REV.	WC-REV.	QC: Inspection item			CUSTOMER	APPROVED BY	DATE	
		C	.0				ALTW	Jerry	2021/03/10	