

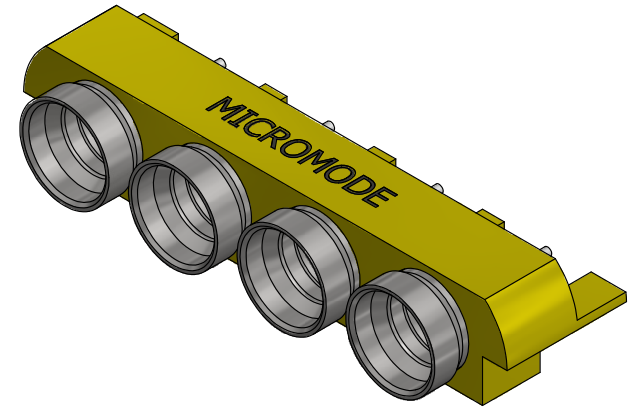


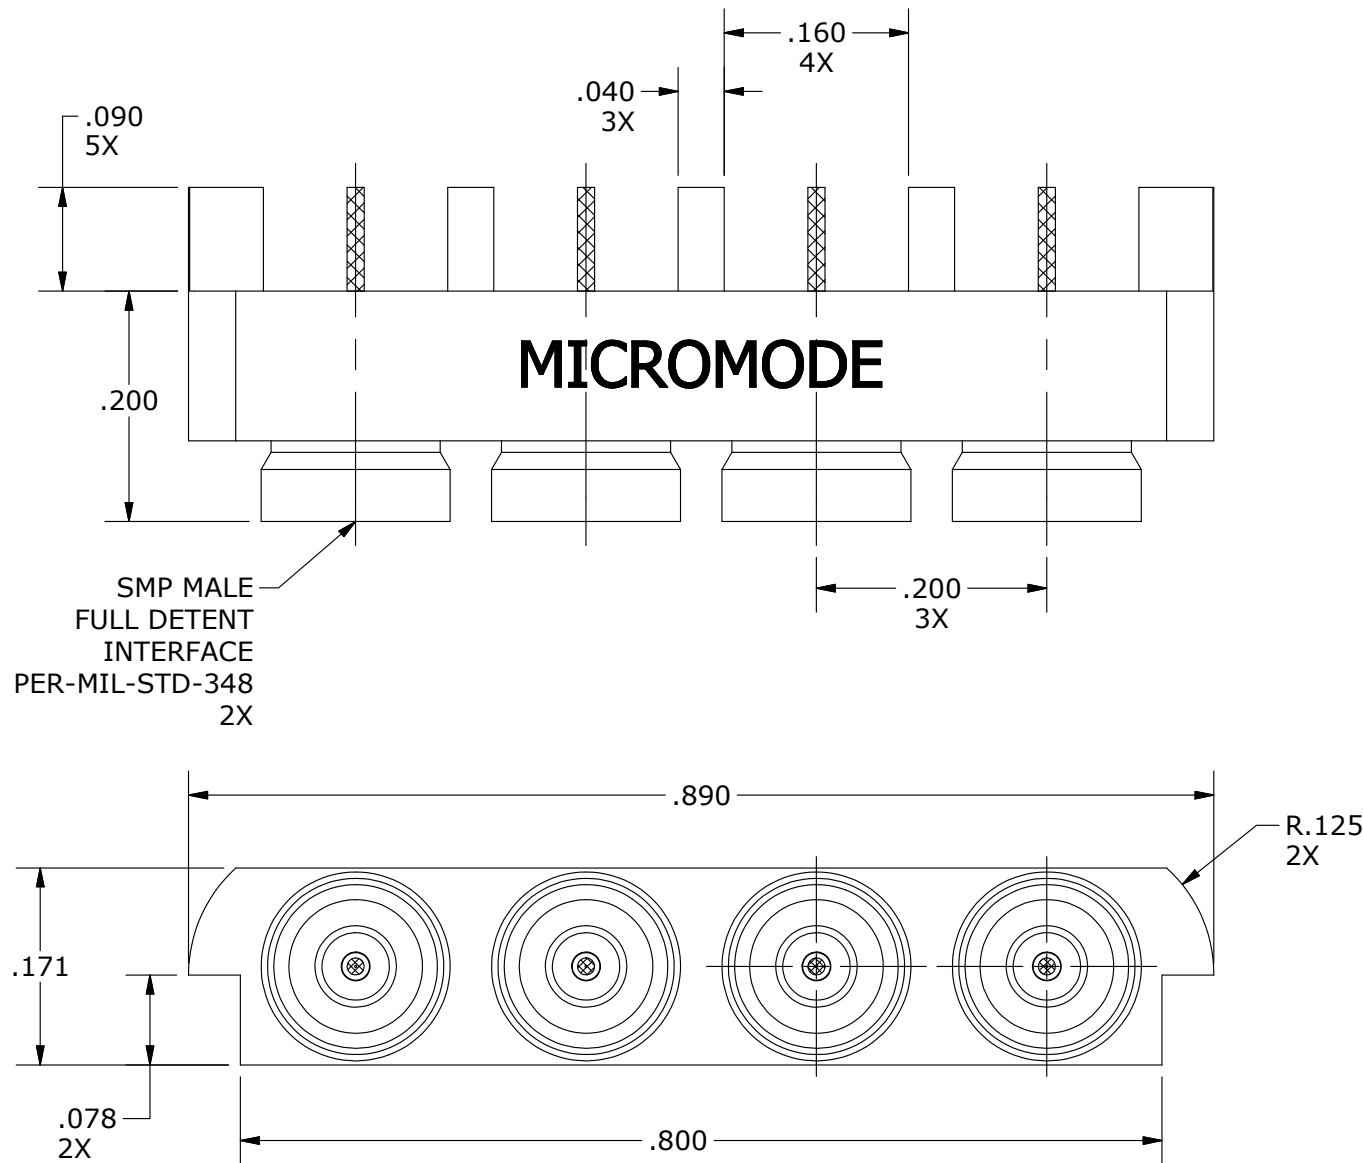

SMP MALE
FULL DETENT
INTERFACE
PER-MIL-STD-348
2X

R.125
2X

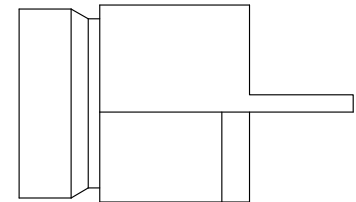

COMPONENT	MATERIAL	FINISH	 MICRO-MODE PRODUCTS, INC. <i>The Reliable Connection to the Future</i> El Cajon, CA 92020 ph 619.449.3844 www.micromode.com CAGE CODE 15907				
MMSP BODIES	303 CRES, ASTM A582	PASSIVATE, AMS-QQ-P-35	ASSEMBLY PROCEDURES: N/A		SMP FULL DETENT 4 PORT EDGE LAUNCH, PRE-TINNED		
INSULATORS	PTFE PER ASTM D1710 TYPE 1, GRADE 1, CLASS A						
2 PORT BODY	BRASS, ASTM B16 UNS C36000	GOLD PLATE, MIL-DTL-45204, TYPE 3, GRADE A, 8μ" MAX, OVER NICKEL PER SAE AMS-C-26074, 50μ" MIN	TOOL: N/A		PART NO. MMSP-14019		REVISION -
CONTACTS	BeCu, ASTM B196, UNS C17300	GOLD PLATE, MIL-DTL-45204, TYPE 1, GRADE C, CLASS 1					
SOLDER	Sn63		SHEET 1 OF 1	2/17/2015	BJ	EB	